ENGINEERING NEWS-RECORD

APRIL 25, 1957

PRICE 35 CENTS

CONTENTS ON PAGE 21

- Special road finisher produces even surface p. 49
- Identical schools reveal two year price rise p. 65

MICH. STATE LIBRARY

APR 25 1957

Theaters back-to-back for colonial Williamsburg p. 54

A McGRAW-HILL PUBLICATION

MICH STATE LIBRARY N
LANSING MICH 13

Taming over 7 Trillion Gallons of Turbulent Missouri River

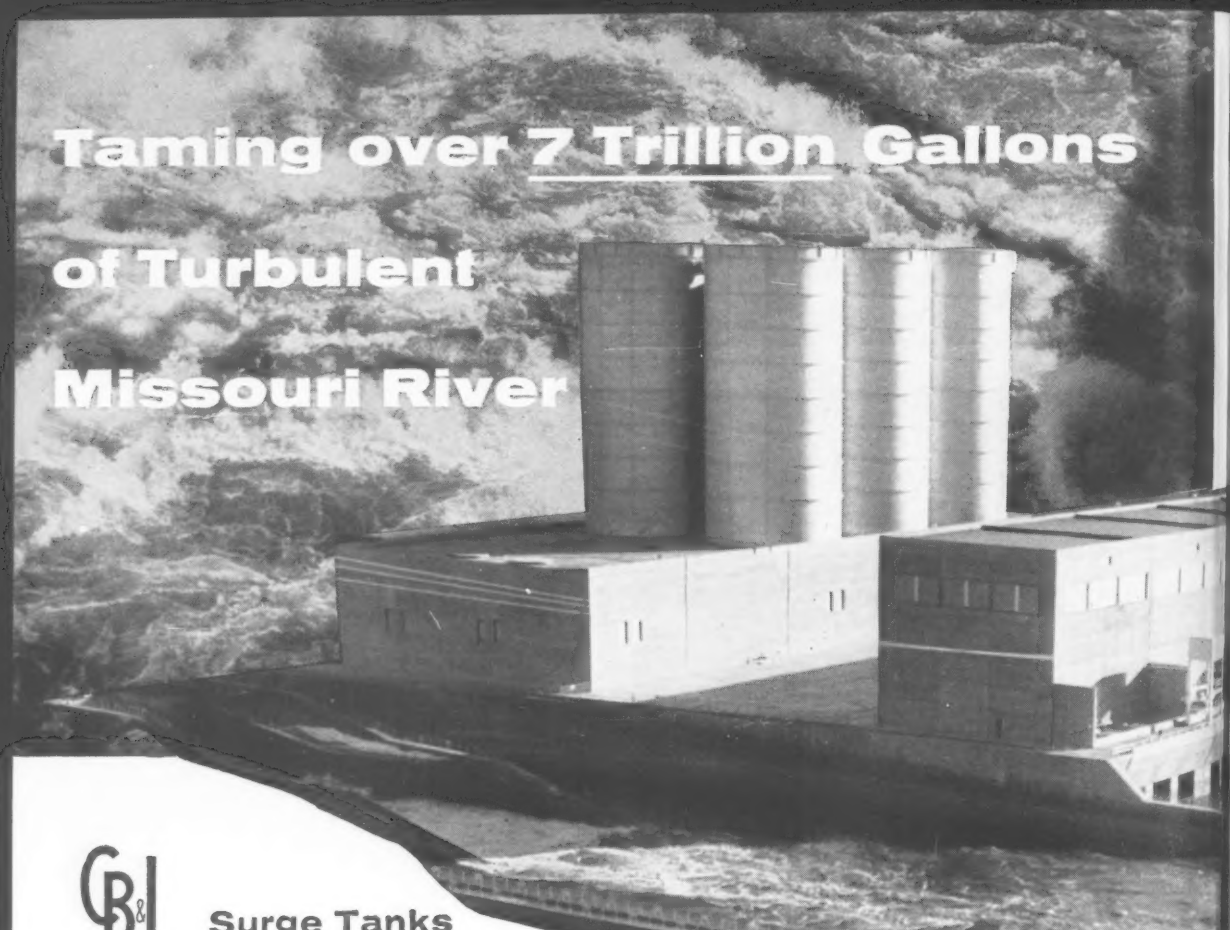

CB&I Surge Tanks Serve Garrison Dam

When completed, the new Garrison Dam, opened in January 1956 near Riverdale, North Dakota, will provide 400,000 kilowatts of power, provide flood control and needed irrigation for large areas of both North and South Dakota. Its huge reservoir will form a lake 200 miles long to hold 7,494,573,000,000 gallons of, once turbulent, Missouri River water.

To control the, now man-made, turbulence of these waters as they race from reservoir to power tunnel, Army engineers of the Missouri River Division will rely on the six CB&I surge tanks shown above.

These 65 ft. diam. by 135 ft. high tanks are typical of pipelines, penstocks and steel plate structures CB&I has built for hydroelectric generating plants and for water diversion projects all over the world. Our plants are fully equipped and competently staffed to design, fabricate and *erect* such structures to *your* specifications. Write our nearest office for details.

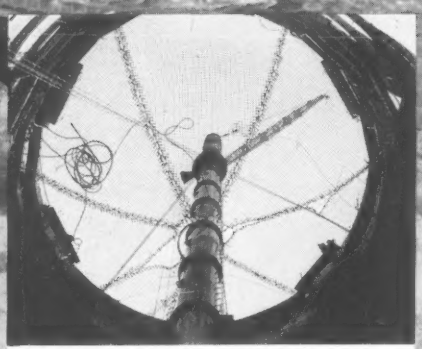

Worm's-eye view looking up through safety net to boom tower used during erection of CB&I surge tanks at Garrison Dam.

Chicago Bridge & Iron Company

Atlanta • Birmingham • Boston • Chicago • Cleveland • Detroit • Houston
New Orleans • New York • Philadelphia • Pittsburgh • Salt Lake City
San Francisco • Seattle • South Pasadena • Tulsa
Plants in BIRMINGHAM, CHICAGO, SALT LAKE CITY and GREENVILLE, PA.
REPRESENTATIVES AND LICENSEES:
Australia, Cuba, England, France, Germany, Italy, Japan, Netherlands, Scotland

Mayari R holds original paint 10 years on Eel River bridge

This bridge, crossing the Eel River at North Scotia, Calif., was built in 1941 of Mayari R high-strength, low-alloy steel. In September of that year the bridge was given its original painting of two coats of red lead and one of aluminum paint.

So well did the Mayari R retain this paint that it required no further attention until 1951—ten years later—when the bridge was again completely painted! And that tells scarcely half the story; the fact is, the maintenance engineers expect this first repainting to hold until 1965—a 24-year life from two paint jobs!

This remarkable record of paint-adherence illustrates a characteristic of Mayari R appreciated by bridge engineers and maintenance departments. Tests employing five different types of primer paint, exposed under identical conditions for the same period of time, proved that Mayari R holds paint as much as 80 pct longer than carbon steel.

In addition, of course, Mayari R offers a much higher yield point than carbon steel, and 5 to 6 times greater resistance to atmospheric corrosion. These properties, as well as weldability and workability, are fully discussed and illustrated in Catalog 353. Your letter or a phone call to the nearest Bethlehem office will bring a copy of the catalog to you promptly.

BETHLEHEM STEEL COMPANY
BETHLEHEM, PA.

On the Pacific Coast Bethlehem products are sold by Bethlehem Pacific Coast Steel Corporation. Export Distributor: Bethlehem Steel Export Corporation

Mayari R...High-Strength, Corrosion-Resisting Steel

BETHLEHEM STEEL

FOSTER LIGHTWEIGHT PILING

the best, low-cost protection for light load excavation

This is the most economical sheeting available for lighter excavation jobs. Foster Lightweight Piling offers the greatest strength, pound for pound, of any other lightweight piling, handles by hand, drives with an airhammer, requires no special rig or tools. Rigid box-type corrugation gives easier driving and recovery, lets you work faster. Special interlock design won't jam, permits the simple locking of sheets together without sliding one into the other the entire length. Higher section modulus permits using a lighter gauge, with less bracing—*assures lower costs* on any job. Immediate deliveries in any length, in any quantity from Foster warehouse stocks—Rental or Sale. Investigate these special advantages. Write for catalogs and quotations on your next job.

STEEL-SHEET PILING • PIPE-FOR-PILING
H-BEARING PILE • RAIL PILE
PIPE • RAILS • TRACK EQUIPMENT

L.B. FOSTER CO.
PITTSBURGH 30 • NEW YORK 7 • CHICAGO 4
ATLANTA 8 • HOUSTON 2 • LOS ANGELES 5

ENGINEERING NEWS-RECORD

EIGHTY-THIRD YEAR OF PUBLICATION

MEMBER

Editorial Offices, 330 W. 42nd St., New York 36, N. Y.
New York - LOngacre 4-3000; Chicago - MOhawk 4-5800; San Francisco - DOuglas 2-4600; Washington - REpublic 7-6630

Waldo G. Bowman, Editor

Highways, Airports—Transportation

Eugene E. Halmos, Jr., *Senior Editor*
Edward M. Young, Jr., Joseph N. Todaro

Buildings, Bridges—Structures

Frederick S. Merritt, *Senior Editor*
James B. Sullivan, John P. Mahoney

Rivers, Sanitation—Water Use

Arthur J. Fox, Jr., *Senior Editor*
Howard Jacoby, Marc Leggiero

Finance, Labor—Management

Clyde C. Henning, *Associate Editor*
Charles J. Harding

Regional Editors

J. Roland Carr, *Chicago, 520 N. Michigan Ave.*
Lauress L. Wise, *San Francisco, 68 Post St.*

Copy, Presentation—Production

Stanley C. Jensen
Barbara Lamb
Harry W. Jensen, *Presentation*
Katherine A. Lacy, *Makeup*
John C. Greenough, *Printing*

Statistics, Prices, Costs—Business News

Elsie Eaves, *Manager*
Julia Mahoney, *Construction Reports*
Mildred Wetzel
Marion Sciorra, Florence Dembek
James Webber, *Economics*
Ruth I. Carlson, Marie Roessler, Evelyn Huber
Ingeborg von Zitzewitz, *Unit Prices*

Editorial Research and Indexing

Helen Rich
Eva Glerat, Rene Hay
Patricia Witschger, Marianne Stern, Ruth Solomon

Consulting Editors: **Van Tuyl Boughton,** *New York*
Nathan A. Bowers, *San Francisco*

Washington Bureau, National Press Bldg., Washington 4, D. C., George B. Bryant, Jr., Chief, Alan E. Adams, Glen R. Bayless, Roy Calvin, Ernest Conine, John C. L. Donaldson, Jay Flocken, Boyd France, Sam J. Justice, Arthur J. Kraft, Donald O. Loomis, Gladys Montgomery, Arthur L. Moore, Seth T. Payne, Morton A. Reichek, V. Craig Richter, Caroline W. Robertson, Vincent B. Smith.

Domestic News Bureaus: Cleveland—1510 Hanna Bldg., Cleveland 15, William G. Meldrum, Michelle M. Perry; **Detroit**—856 Penobscot Bldg., Detroit 26, Harry Homewood, Chief; **Pacific Coast**—68 Post Street, San Francisco 4—Margaret Ralston, Chief, Jenness Keene, Sue Johnson, 1125 West 6th Ave., Los Angeles 17—John K. Shinn, Michael J. Murphy; **Seattle**—6040 Fifth Ave., N. E., Ray Bloomberg; **Southeastern**—801 Rhodes-Haverty Bldg., Atlanta 3, Charles T. Dixon, Jr., Chief, Frances Ridgway; **Southwestern**—901 Vaughn Bldg., Dallas, Kemp Anderson, Jr., Chief.

Foreign News Bureaus: New York—John Wilhelm, Editor; **London**—William J. Coughlin; **Paris**—Robert E. Farrell; **Rio de Janeiro**—Peter Weaver; **Mexico City**—Jack Kearney; **Bonn**—Morrie Helitzer; **Beirut**—O. M. Marashian; **Tokyo**—Dan Kurzman; **Melbourne**—Alicja Grobtuch. Correspondents in 56 cities throughout the world.

Correspondents: In 77 principal cities in the U.S. and possessions and the Dominion of Canada.

McGraw-Hill Economics Department: Dexter M. Keezer, director; W. H. Chartener

Robert F. Boger, Publisher

ENGINEERING NEWS-RECORD, Vol. 158, No. 17, April 25, 1957

Published weekly by McGraw-Hill Publishing Company, James H. McGraw (1860-1948), Founder. Publication Office, 99-129 North Broadway, Albany 1, N. Y. See panel below for directions regarding subscriptions or change of address. **Executive, Editorial, Advertising and Circulation Offices. McGraw-Hill Building, 330 W. 42nd St., New York 36, N. Y.** Donald C. McGraw, President; Joseph A. Gerardi, Executive Vice President and Treasurer; John J. Cooke, Secretary; Nelson Bond, Executive Vice President, Publications Division; Ralph B. Smith, Vice President and Editorial Director; Joseph H. Allen, Vice President and Director of Advertising Sales; A. R. Venezian, Vice President and Circulation Coordinator. **Subscriptions are solicited only from persons with identifiable commercial or professional interest in construction and building. Position and company connection must be indicated on unsubscribed orders.** United States subscription rate for individuals in the field of this publication $6.00 per year, single copies 35 cents; foreign $20.00 per year, payable in advance. Second-Class mail privileges authorized at Albany, New York. Printed in U.S.A. Title registered in U.S. Patent Office.

© Copyrighted 1957 McGraw-Hill Publishing Company, Inc. All Rights Reserved.

SUBSCRIPTIONS: Send subscription correspondence and change of address to Subscription Manager, ENGINEERING NEWS-RECORD, 330 W. 42nd St., New York 36, N. Y. Subscribers should notify publisher promptly of any change of address, giving old as well as new address, and including postal zone number, if any. If possible, enclose an address label from a recent issue of the magazine. Please allow one month for change to become effective.

Postmaster: Please send Form 3579 to Engineering News-Record, 330W. 42nd St., New York 36, N. Y.

MAXIMUM ECONOMY 3 WAYS

with

UNITED STATES

CONCRETE PIPE

PROJECT: By WASHINGTON SUBURBAN SANITARY COMMISSION—Lewisdale Development, Prince George's County, Md.

CONTRACTOR: Princemont Construction Co., Silver Springs, Md.

PIPE: 54" C-76 Table I Pipe, manufactured by United States Concrete Pipe Co., Baltimore, Maryland.

■ **LOW COST** — Plan on UNITED STATES Concrete Pipe for your projects. It's your wise choice for *first* cost economy.

■ **HIGH QUALITY** — UNITED STATES Concrete Pipe exceeds requirements of A.S.T.M. and other official specifications for strength and density. Greater operating economy of the line is assured over a longer service life.

■ **PROMPT SERVICE** — "UNITED STATES" gives you greater "on the job" economy with immediate shipments of all requirements for Concrete Sewer and Culvert Pipe, Fittings, Vitrified Clay Plate-Lined Concrete Pipe, Precast Manholes and TYLOX Flexible Couplings.

ARRANGE NOW FOR UNITED STATES CONCRETE PIPE ON YOUR NEXT PROJECT

6035

UNITED STATES CONCRETE PIPE CO.

UNIVERSAL SEWER PIPE CORPORATION

PRODUCTS

Vitrified Clay Pipe with Tylox Flexible Couplings, Vitrified Clay Liner Plates, Ship Lap Wall Coping and other Clay Products, Concrete Pipe.

SALES OFFICES

Baltimore 27, Md.—Halethorpe Branch, Box 7428 .....Tel. EL-877
Philadelphia, Pa. .....Tel. EN-6015
P. O. Box 30, Bristol, Pa. .....Tel. ST-8-5571
Cincinnati, Ohio—P. O. Newtown, Ohio, Box 215 .....Tel. LO-1-7846
Ft. Lauderdale, Fla.—P. O. Box 958 .....Tel. JA-4-8461

GENERAL OFFICES • 1500 Union Commerce Bldg. • Cleveland 14, Ohio • Tel. Main 1-5240

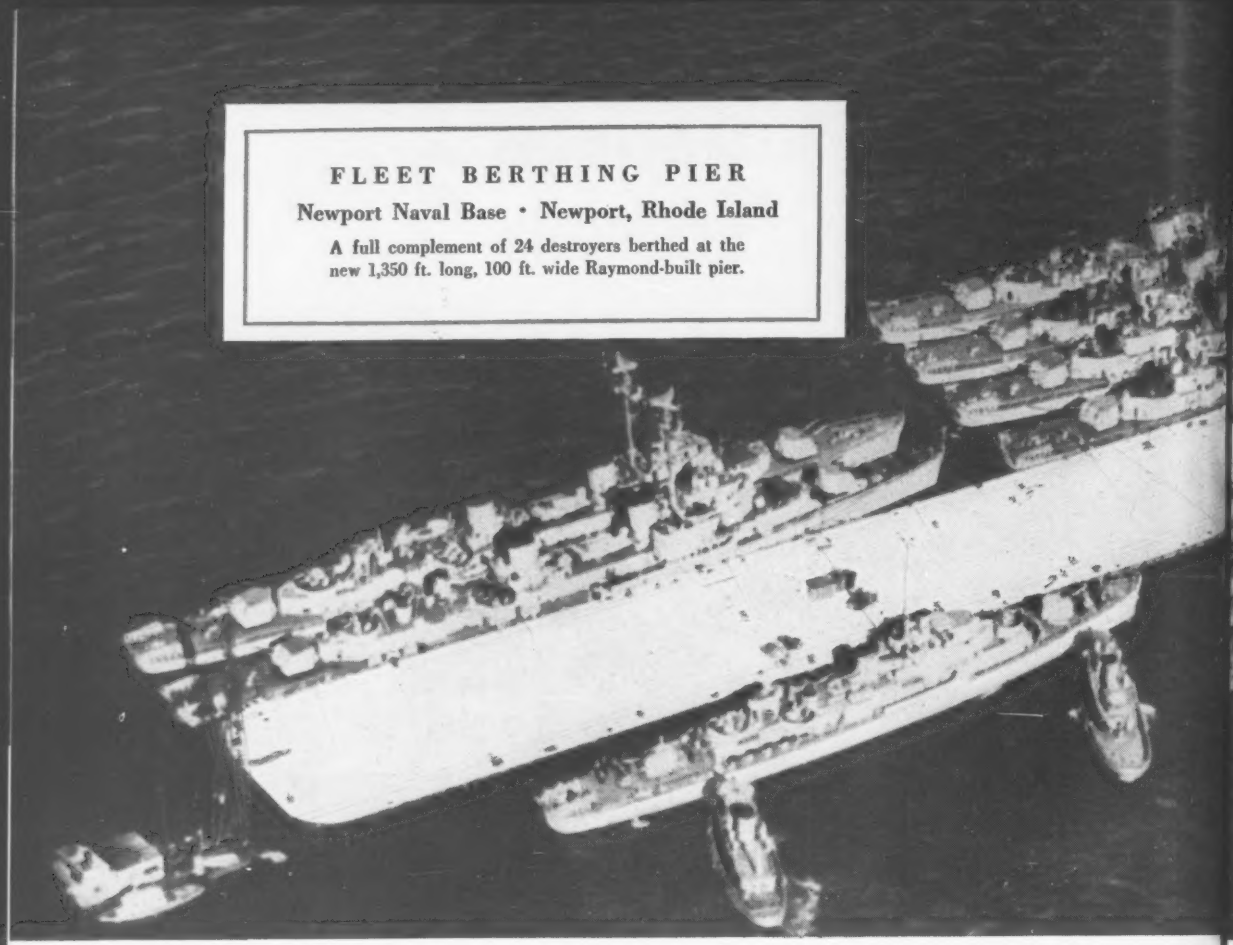

FLEET BERTHING PIER

Newport Naval Base • Newport, Rhode Island

A full complement of 24 destroyers berthed at the new 1,350 ft. long, 100 ft. wide Raymond-built pier.

Offshore and Waterfront Installatio

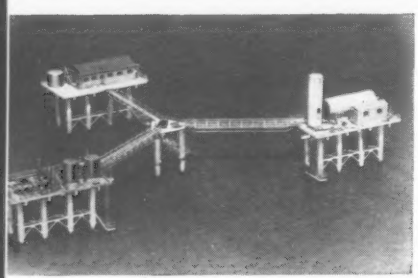

OIL PRODUCTION PLATFORM, supported by Raymond Prestressed Concrete Cylinder Piles off the Louisiana Gulf Coast for Shell Oil Co.

TEXAS TOWER, the world's first radar island, off the New England coast, was a joint venture of Raymond-DeLong.

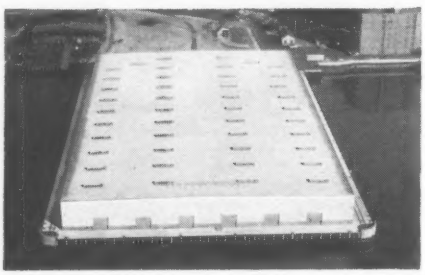

SHIP TERMINAL, a $6,000,000 Raymond-built structure for the Port of Boston, at East Boston, Mass. One of the country's largest.

ORE DOCKS for Great Lakes Steel Corp., Zug Island, Mich. Shown here during construction.



SEA WALL, special reinforced concrete s protection at Lake Pontchartrain, on the skirts of New Orleans, La.

LOADING DOCK for the American Sugar fining Co., outside of New Orleans, La.





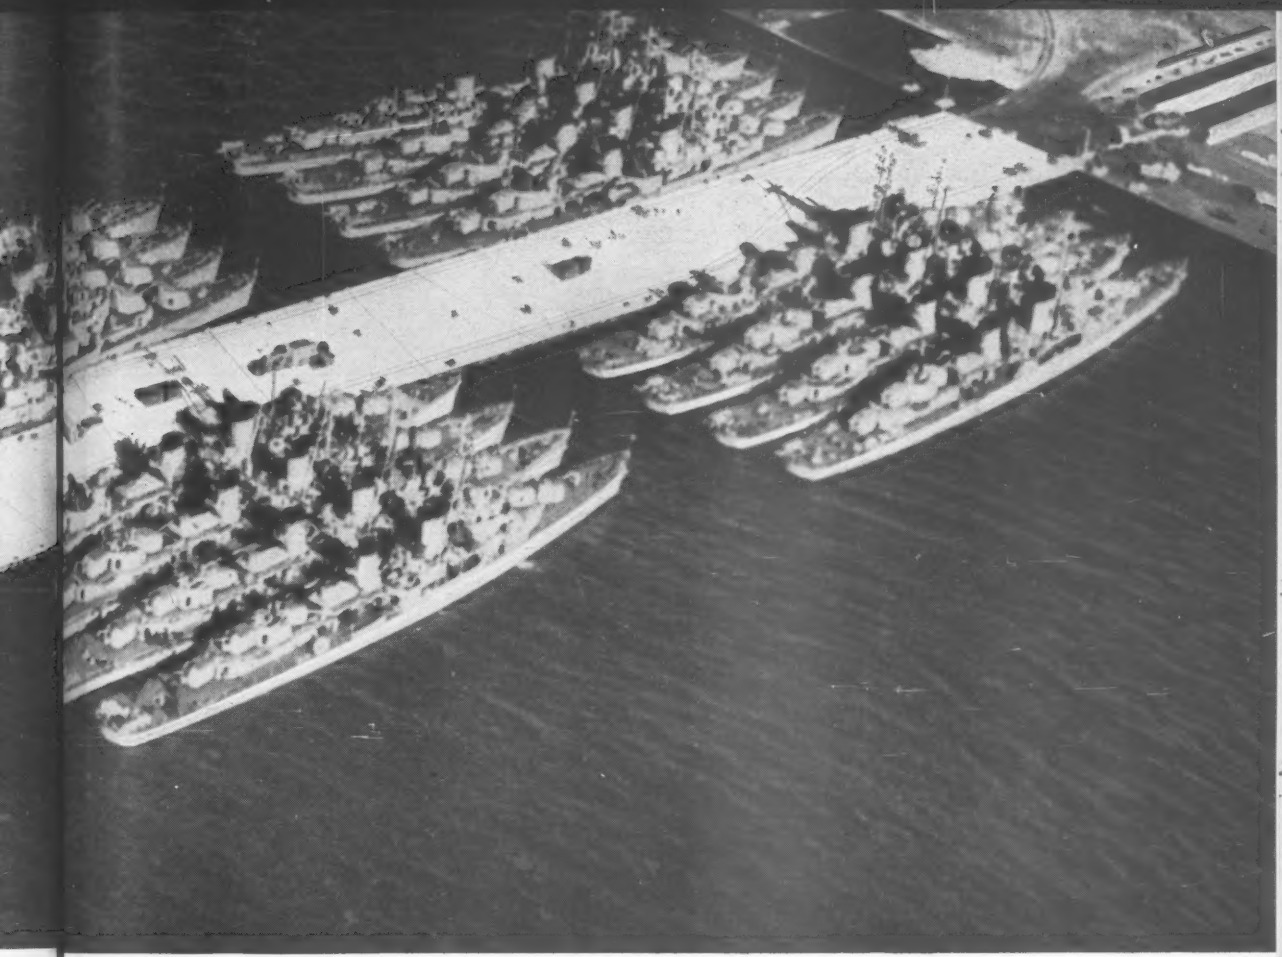

. . . another RAYMOND service

The complete construction of waterfront and offshore structures has been an integral part of Raymond's wide scope of activities, both at home and abroad, for many years. On these pages are a few examples of the number of wharves, jetties, sea walls, navigational aids, piers, oil drilling platforms and other similar contracts we have completed recently.

In addition, we continually strive to improve our service, methods and material. Our latest development is the Raymond Prestressed Concrete Cylinder Pile. Designed specifically for offshore and waterfront projects and bridges, this low-cost, fireproof support assures greater structural strength, increased load capacity and longer life and is not subject to corrosion or damage by marine life or water. Furthermore, it has a particularly strong resistance to bending from the force of waves and winds. Investigate the advantages of using Raymond methods, materials and experience on your next waterfront or offshore project.

OUR 60th YEAR

Foundations for the Structures of America . . . Complete Construction Services Abroad

RAYMOND
CONCRETE PILE CO.
140 Cedar Street, New York 6, N. Y.
Branch Offices in Principal Cities of the United States. Subsidiaries in Canada, Latin America and other countries.

You are cordially invited to send for our new Highway Brochure, which gives a detailed resume of how Raymond can help you and the National Highway Program. Just write Dept. E-7, Raymond Concrete Pile Co., 140 Cedar Street, New York 6, New York.

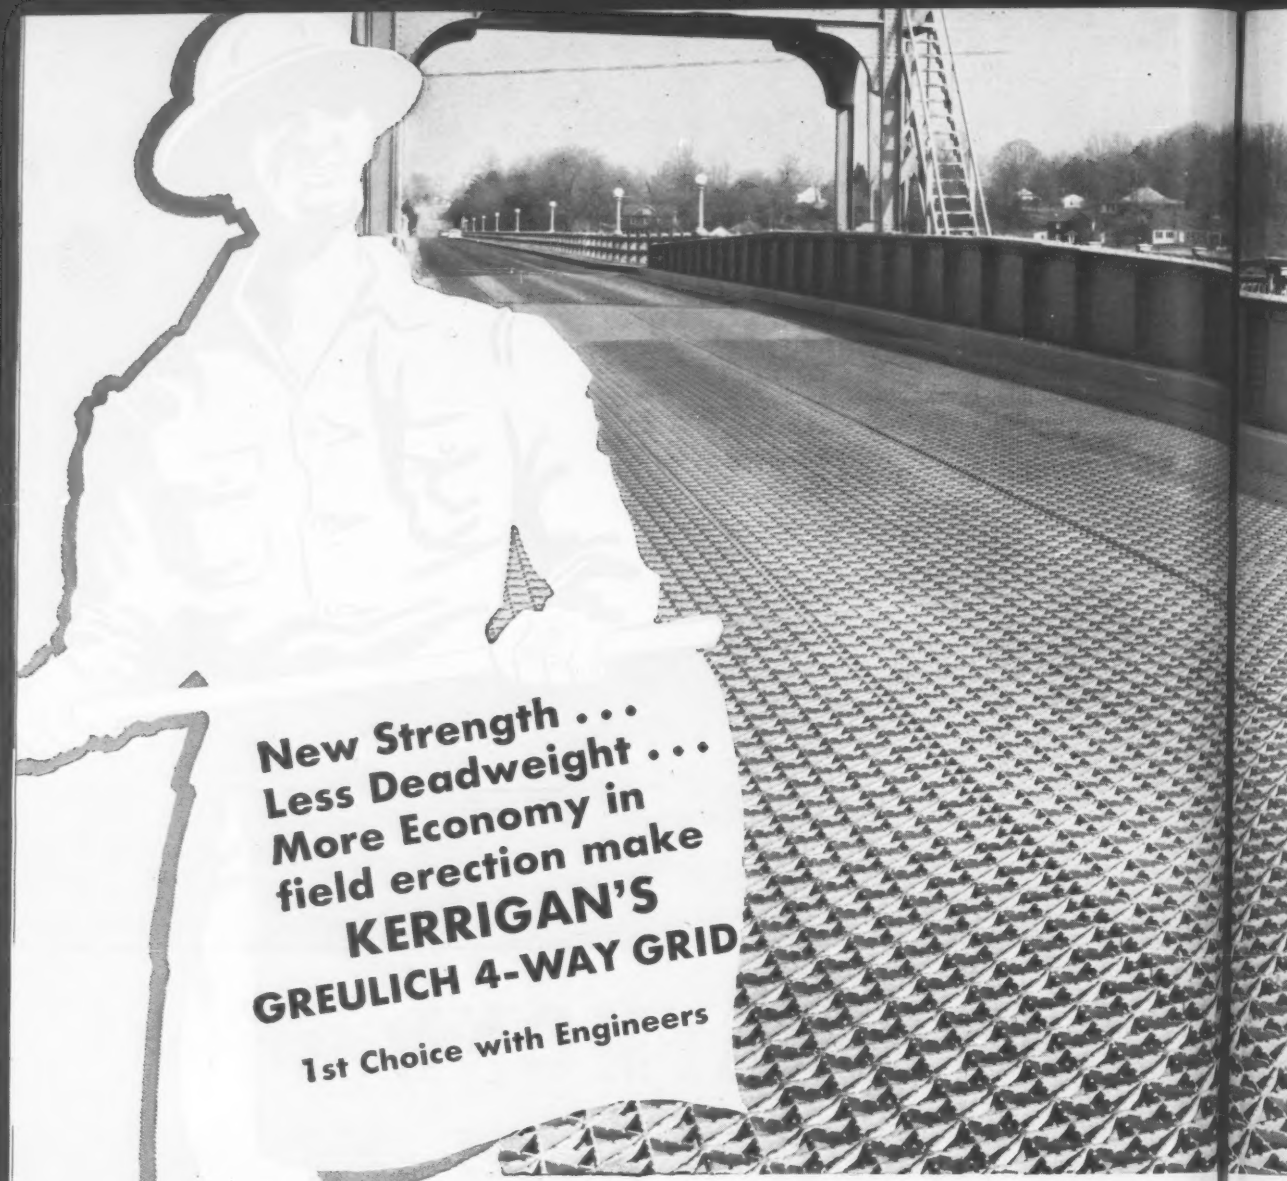

New Strength . . .
Less Deadweight . . .
More Economy in
field erection make
KERRIGAN'S
GREULICH 4-WAY GRID

1st Choice with Engineers

For the beautiful SOUTHRIVE

on Maryland's Route 2 leading into Annapolis, the Empire Construction Co., of Baltimore and the Maryland State Road Commission used Kerrigan's open steel bridge flooring. For the Lanier Bridge at Georgia's Buford Dam, the U. S. Corps of Engineers and Bristol Steel & Iron Works, Bristol, Va., chose it. For the modernization of the famous double-deck Rock Island, Ill. Bridge, Modjeski & Masters, Consulting Engineers, and the F. K. Ketler Co., Chicago, chose it. And for bridges at Raceland, Thibodaux, and New Iberia, La. the Louisiana State Highway Department, F. Miller & Son, Lake Charles and Austin Bridge Co., Dallas and Baton Rouge, contractors, employed the Greulich 4-Way Grid for strength, economy and a smooth and quiet surface.

As you can see in the picture above, the integrally connected triangles of the Greulich 4-Way Grid provide a flat, sing

General Sales Office, 274 Madison Avenue, New York, New York

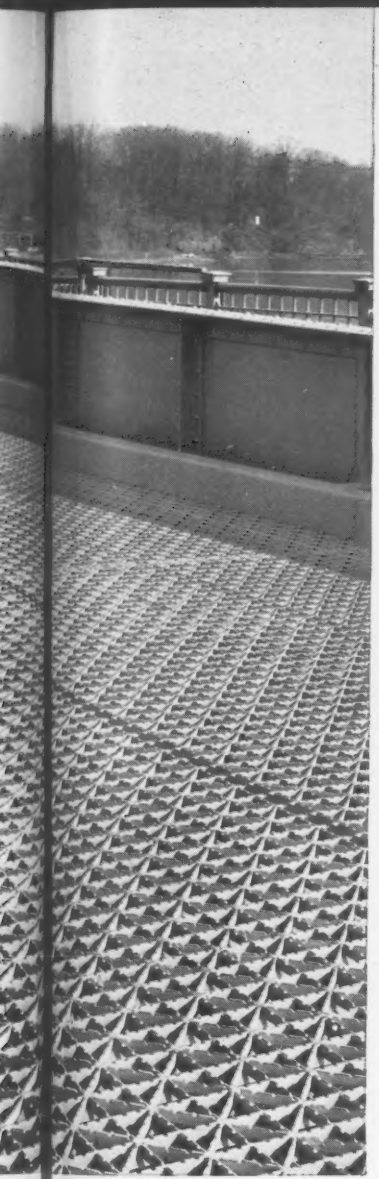

Flat, single plane surface gives smooth ride and reduces tire hum to a minimum on the South River Bridge. At the same time, the triangular opening in design and scientifically located serrations provide high skid resistance.

The famous Rock Island "double-decker" (just ½ mile from the site of the original bridge made famous by Abraham Lincoln's celebrated defense), will be modernized with Kerrigan's Greulich 4-Way Grid filled half-depth with concrete.

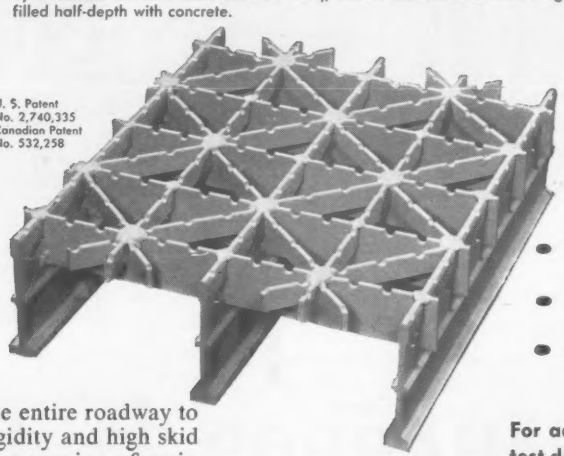

U. S. Patent
No. 2,740,335
Canadian Patent
No. 532,258

...T RIVER BRIDGE

Emp...lane, serrated surface extending over the entire roadway to ...e Roa...sure maximum lateral or horizontal rigidity and high skid ...ng. F...esistance. The 7½-inch center-to-center spacing of main ...s. Cor...earing members permits installation with 20% fewer field ...ol, V...elds with no loss of strength. The 5-inch deep units are ...le-de...bricated in panels 7 feet, 3 inches wide to hold handling ...sulti...osts to a minimum and still permit hauling on flat bed ...it. A...ucks. The flooring can be furnished, when there is need, ... La. t... half-roadway-width units to permit maintenance of one- ...& So...ay traffic at all times where installations are being made to ... Bat...place old floors on existing bridges. When there is ma- ...Grid f...inery or a street below the bridge floor level, concrete ...orm pans and reinforcement rods can also be provided to ...llow filling all or portions of grid half depth with concrete. ...nnecte...his permits a closed surface and yet holds dead load of ...t, sing...oring to a minimum.

- **Stronger**
- **Quieter**
- **20% Fewer Welds**

For additional information, test data, and list of bridges you can inspect in Ga., La., Fla., Mass., Ill., Md., Minn., and Penn., write Harvey F. Neel, Mgr., Division G-7, Kerrigan Iron Works, Inc., Nashville, Tennessee.

THE FORGEST OF KERRIGAN

KERRIGAN IRON WORKS, Inc.

Yor...idge Flooring Division (Harvey F. Neel, Manager), Nashville, Tennessee

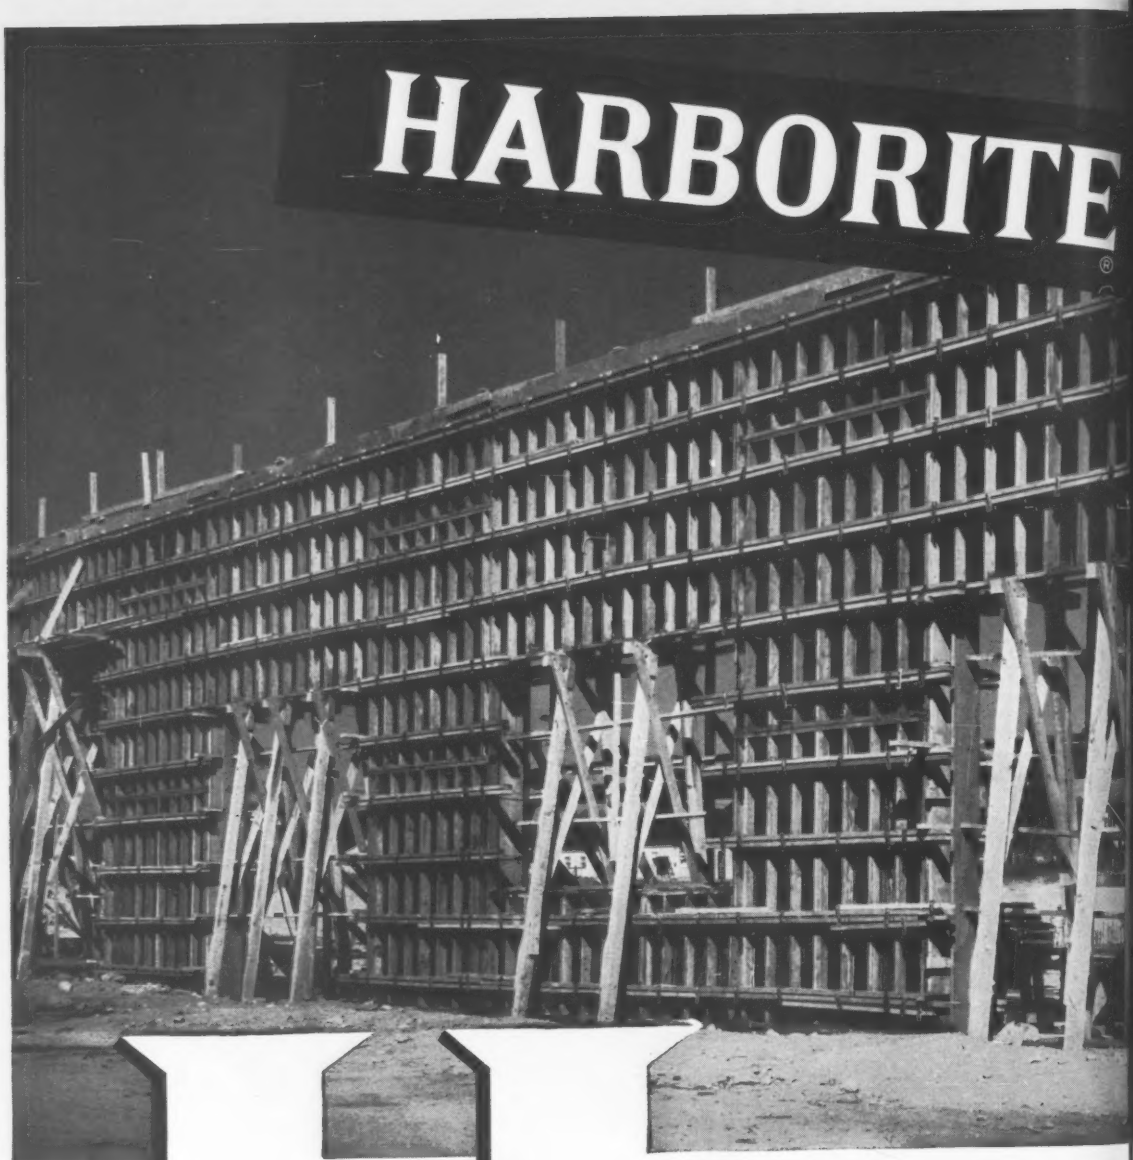

©1956

HARBOR

PLYWOOD CORPORATION

ABERDEEN
WASHINGTON

HARBOR PLYWOOD CORPORATION ENR-12
ABERDEEN, WASHINGTON

Please send me more information, a sample of Harborite, and address of nearest dealer.

NAME_____

FIRM_____

ADDRESS_____

CITY_____ ZONE____ STATE_____

Sales offices and warehouse stocks in: ABERDEEN • ATLANTA • CHICAGO • CINCINNATI • HOUSTO

HIGH RE-USE FACTOR MAKES THIS MIRACLE OVERLAID FIR PLYWOOD YOUR IDEAL MATERIAL...

Forty re-uses—not unusual for Harborite—will cut your cost to less than 1¢ per poured surface foot... and contractors have reported over 100 re-uses for forms made of Harborite! Rigid, abrasion-resistant Harborite panels produce glass-smooth concrete... joints and fins are cut to a minimum... stripping is easier, faster! The super-smooth Harborite overlay will not run, bleed or discolor concrete... it has a special affinity for oil and other form finishes. Available in oversize panels and standard 4′ x 8′ size... in any thickness.

WITH HARBORITE YOU GET MIRROR-SMOOTH SURFACES... FASTER STRIPPING... MINIMUM FINISHING... AND LOWEST COST TOO!

FIGURE YOUR OWN SAVINGS!

	PLYFORM	HARBORITE	MATERIAL YOU NOW USE
WAREHOUSE COST PER FOOT*	$.242	$.308	
AVERAGE NUMBER OF RE-USES	10	40	
COST PER POURED SURFACE FOOT	$.0242	$.0077	

*Prices vary in different areas.

INDIANAPOLIS • JACKSONVILLE • LOS ANGELES • SAN FRANCISCO • SEATTLE • TAMPA • ***other major cities***

Jesse Franco and Johnnie Palmer, Franco & Palmer, contractors, Dinuba, California

"T5X ...keeps our 'Cats' operating around the clock"

"T5X Motor Oil keeps our D8 'Cats' operating around the clock on jobs that we consider most abusive to engines and equipment.

"The loading of our 18-yard carryalls really puts an engine through its paces, from slow idle to maximum power within seconds. Usually after levelling we subsoil to a depth of 36", and in certain areas here in the Alta District the hardpan requires two D8's both operating at peak output. The strain on these units is terrific but T5X has never failed to keep our equipment rolling.

"We have been using T5X and other Union Oil products for more than 10 years now, and we highly recommend them to every contractor facing the really tough jobs."

Everywhere in the country the story is the same. Contractors with the tough jobs know they can rely on T5X Motor Oil. If you haven't yet tried this *amazing* purple motor oil in your equipment we suggest you call your nearby Union Oil representative for immediate delivery.

UNION OIL COMPANY 76
OF CALIFORNIA

Los Angeles: *Union Oil Bldg.* • ***New York:*** *45 Rockefeller Plaza* • ***Chicago:*** *1612 Bankers Bldg.* • ***Philadelphia:*** *Eastwick Ave. & Edgewood St.* ***Dallas:*** *313 Fidelity Union Life Bldg.* • ***Kansas City, Mo.:*** *612 W. 47th St.* • ***New Orleans:*** *644 Nat'l Bank of Commerce Bldg.* • ***Boston:*** *214 Harvard Ave.*

Reader Comment

Faster Concreting at Bhakra

Sir—Since our last report on concreting at Bhakra Dam (ENR Dec. 20, 1956, p. 9), where it was noted that 8,376 cu yd had been placed in one 24 hour period, we are happy to inform you that the previous record was bettered during the 24 hours starting from 8:00 a.m. March 18 to 8 a.m. on March 19, when 9,104 cu yd was placed. This was accomplished from one batching plant with four 4-cu yd mixers. During one 8 hr shift, 761 buckets of concrete were mixed and transported. Placing was mostly done by two double cantilever cranes and two revolving cranes except that, for a short time, a third revolving crane was also working.

M. R. Chopra
Joint Director
Construction and Plant Design
Bhakra Project
Nangal Township, India

Stresses in Dams

Sir—I have recently designed an arched gravity dam on Kings River, Calif., which has a lower portion resting on banks of about 60 deg inclination similar to the banks at Grand Dixence Dam in Switzerland, whose design was discussed in your recent article (ENR March 28, 1957). I have found that such conditions are not described in books or taught in schools. Instead, straight gravity dams like Grand Dixence are being designed as if they were infinitely long on level foundation, with uplifts vertical.

Actually, it is a spatial problem, with sloping sides exerting hundreds of millions to many billions of pounds wedge pressures against the central portion, and uplifts exerting inclined forces instead of vertical.

If the toe pressure at Grand Dixence is 1849 lb per sq. in. (as stated) for a parallel slice, there would be wedging pressures on the deepest part of almost same amount, producing tensions perpendicular to the face of from 160 to 200 lb per sq. in., additive to a like amount from slice forces, and varying somewhat with elastic properties of

Engineering News-Record welcomes expression of opinions from its readers. Comment should be as brief as possible and pertinent to subjects of current construction importance. Letters should be addressed Editor, Engineering News-Record, 330 W. 42nd St., New York 36, N. Y.

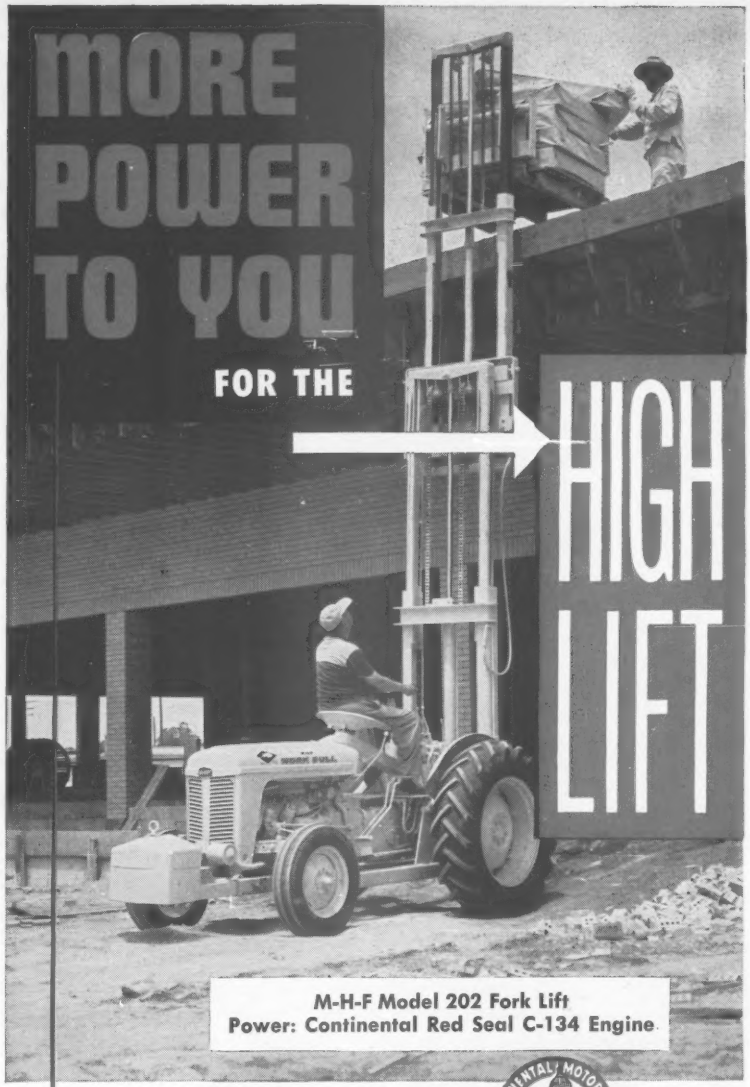

Like other leading makes of industrial tractors, Massey-Harris-Ferguson's newly-introduced WORK BULL line of light- and medium-duty utility units—gasoline and Diesel—features the plus value of power by Continental Motors, engine specialists since 1902.

• PARTS AND SERVICE EVERYWHERE •

Continental Motors Corporation
MUSKEGON • MICHIGAN
8 EAST 45TH ST., NEW YORK 17, NEW YORK • 3817 S. SANTA FE AVE., LOS ANGELES 58, CALIF.
6218 CEDAR SPRINGS ROAD, DALLAS 9, TEXAS • 1252 OAKLEIGH DR., EAST POINT (ATLANTA) GA.

COAST TO COAST...

Daytona Beach, Fla.—16" flexible joint cast iron pipe being installed for water line crossing Halifax River.

Across the nation, thousands of forward-looking communities use cast iron pipe for their water, gas and sewerage systems. For good reason! Nearly seventy American cities are still being served by cast iron mains laid over a century ago. This outstanding record for long life is unmatched by any other pipe!

What's more, the *modernized* cast iron pipe, centrifugally cast, today is even stronger, longer-lasting, more uniform.

When mains are needed, specify cast iron pipe. It's America's foremost pipe . . . for performance, dependability, economy. The record proves it!

CAST IRON PIPE

IT'S CAST IRON PIPE

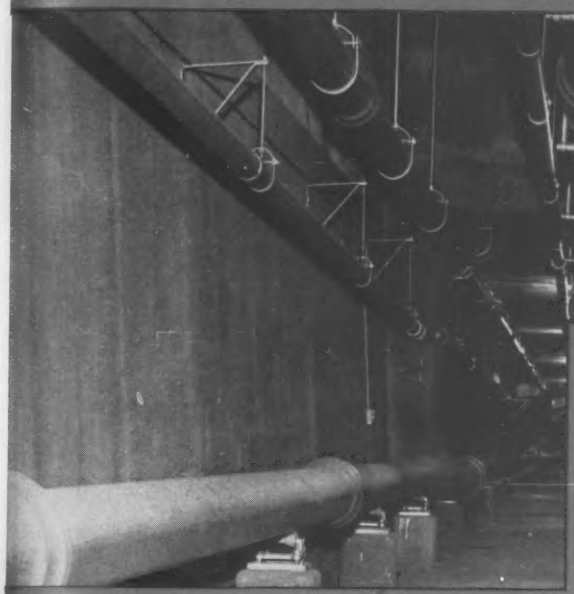

Cleveland, Ohio—Over one half million gallons of sludge are pumped daily through 13 miles of 12" cast iron force main to the Southerly Sewage Treatment Works.

Portuguese Bend, Calif.—Cast iron pipe and fittings for salt water line at Oceanarium, Marineland of the Pacific.

CAST IRON

Cast Iron Pipe Research Association, Thos. F. Wolfe, Managing Director, Suite 3440, Prudential Plaza, Chicago 1, Ill.

SERVES FOR CENTURIES...

Torresdale Filter Plant: Morris-Knowles, Inc., Design—McCloskey & Co., Construction
in PHILADELPHIA
or THAILAND
Spillway Structure, Greater Chao Phya Project—Royal Irrigation Department

Servicised Rubber Waterstop and Self-Expanding Cork Joint Filler SOLVE the SAME PROBLEM

When engineers for two widely separated projects—the Spillway Structure of the Greater Chao Phya Dam in Thailand and the Torresdale Filter Plant in Philadelphia specified premolded expansion joint and waterstop, they chose Servicised Self-Expanding Cork Joint Filler and Dumbbell Type Rubber Waterstop for optimum performance under every condition.

Servicised Self-Expanding Cork is a "maximum performance" material that will keep joint spaces filled under contraction which opens the space to more than its original size. Specially treated to enable it to expand as much as 50% beyond original thickness, Servicised Self-Expanding Cork is fully compressible, non-extruding and resilient. It is widely used in water and sewage treatment plants, canal linings, outlet works, stilling basins of dams.

Servicised Dumbbell Type Rubber Waterstop provides superior characteristics of ultimate elongation, tensile strength and retention in the concrete during contraction to insure an effective seal of joints against water pressure. Available in 2 types—Hollow Bulb and Flat, in 6", 9" and 12" widths. New Union makes field splicing a fast, simple operation. Split Type Waterstop also available.

Servicised products for the construction industry are illustrated and described in the new Servicised Catalog. Write for your copy.

SERVICISED PRODUCTS CORP.
6051 WEST 65th STREET • CHICAGO 38, ILLINOIS

. . . Reader Comment

various brands of mixes and also with time plastic flow.

This would be on the verge of, or past, rupture in deteriorated state, even without taking temperature changes into consideration. Such are so high that we do not hear of them in all cases.

If the Swiss government allows the design on basis of level footings and without temperature, it is its province and not subject to protest unless U.S. citizens are financially involved. However, there seems to be a tendency in the U.S. to beat this record Swiss dam, without considering all of the adversities involved on sloping banks, and we may have a major disaster. I believe that professors at universities should be alerted to remind pupils that the teachings of level design are to be supplemented by actual examples with sloping banks, and also reminded that resultants on sloping banks form an extremely acute angle with the bank unless the abutments are cut to resist sliding. Some relief may be imagined by arch action, if there are no outlet works near the bottom.

FRANCIS N. DLOUHY
Los Angeles, Calif.

CALENDAR

International Commission on Irrigation and Drainage, 3rd Congress, Sheraton-Palace Hotel, San Francisco, Calif., April 29-May 4.

Building Officials Conference of America, Inc., 42nd Annual Convention, The Jung Hotel, New Orleans, La., May 6-9.

American Water Works Association annual conference, Atlantic City, N. J., May 12-17.

12th Purdue Industrial Waste Conference, Purdue Memorial Union Bldg., Lafayette, Ind., May 13-15.

Construction Specifications Institute, annual convention, Sheraton-Park Hotel, Washington, D. C., May 13.

Rail Steel Bar Association, Broadmoor Hotel, Colorado Springs, Col., May 13-15.

American Institute of Architects, Centennial Celebration, Sheraton-Park Hotel, Washington, D. C., May 14-17.

Jet Age Airport Conference, ASCE Air Transport Division, Park Sheraton Hotel, New York, N. Y., May 15-17.

Society of American Military Engineers, annual meeting, Mayflower Hotel, Washington, D. C., May 20-21.

American Institute of Steel Construction, Ninth Annual Engineering Conference, Edgewater Beach Hotel, Chicago, Ill., May 27-28.

Air Pollution Control Association, golden jubilee meeting, St. Louis, Mo., June 2-6.

American Society of Civil Engineers, spring convention, Hotel Statler, Buffalo, N. Y., June 3-7.

Annual Meeting of American Society for Testing Materials, Chalfonte-Haddon Hall, Atlantic City, N. J., June 16-21.

Concrete reinforcing Steel Institute, annual meeting, The Greenbrier, White Sulphur Springs, W. Va., June 24-29.

Double your secondary crushing capacity with a CEDARAPIDS PORTABLE PRIMARY

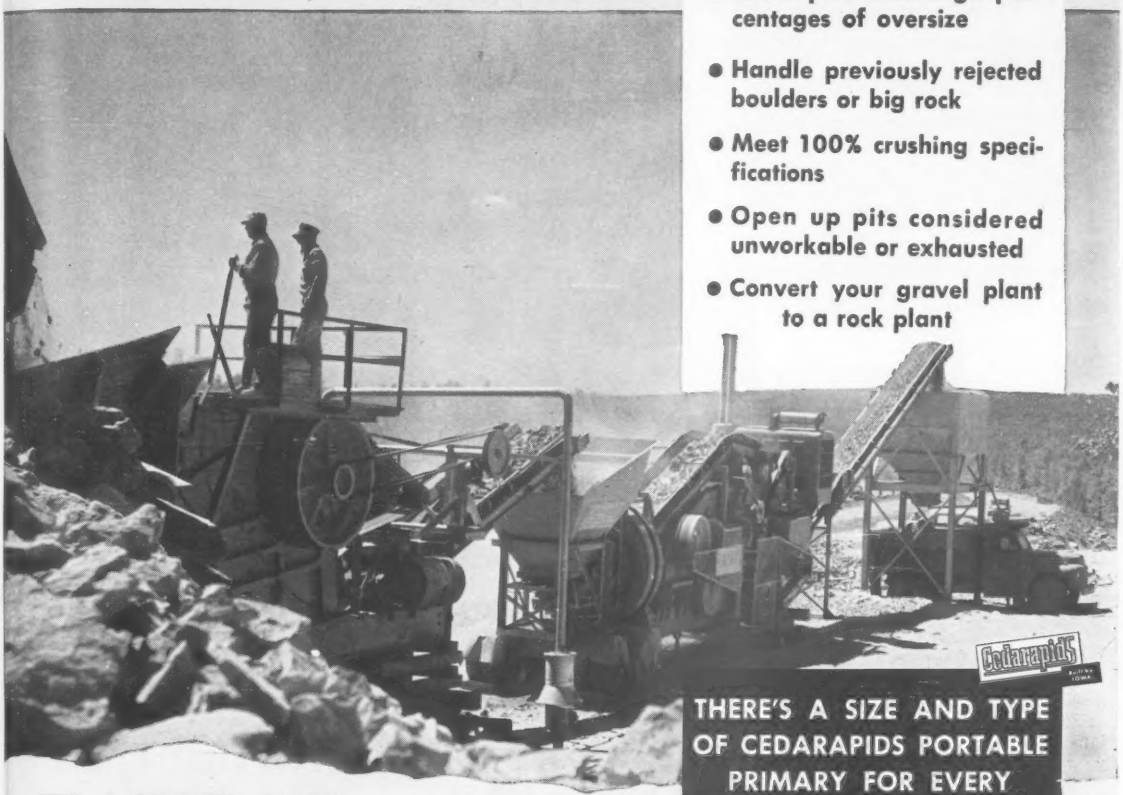

...and get all these other advantages!

- Work pits with high percentages of oversize
- Handle previously rejected boulders or big rock
- Meet 100% crushing specifications
- Open up pits considered unworkable or exhausted
- Convert your gravel plant to a rock plant

IT'S A PROVED FACT!

With a Cedarapids Portable Primary *of the size and type to fit your conditions* to handle the heavy crushing load ahead of your secondary equipment, you can double your plant capacity!

It adds a third stage of reduction to your operation, permitting your secondary crushers to handle twice as much material. It reduces the circulating load. More material will be taken off by the screen in your secondary plant before it reaches the crusher.

Equipped with a vibrating grizzly or scalping screen, your Portable Primary by-passes fines, sand, chips or dirt to prevent choking of the crushers.

You can turn *all* pit-run material, even big boulders, into specification 100% crushed aggregate. You'll have the capacity and flexibility to handle a wider variety of jobs . . . open up deposits considered unworkable because of excessive oversize or fines, re-open pits thought to be exhausted, operate in pits or quarries closer to the job to save hauling costs.

THERE'S A SIZE AND TYPE OF CEDARAPIDS PORTABLE PRIMARY FOR EVERY PRIMARY REDUCTION JOB

Single Jaw Crusher

15″ x 24″ 25″ x 40″
22″ x 36″ 30″ x 40″

Twin Jaw Crusher

18″ x 36″

with low-cost Vibrating Grizzly

Increases output of primary crusher up to 25% by by-passing fines before they reach the crusher. Three sizes available with single or double deck.

with Scalping Screen

48″ x 6′ horizontal vibrating screen between feeder ond crusher increases production in pits with low percent of crushing, or where specifications require 100% crushed particles.

Portable Double Impeller Impact Breakers

30″ x 42″ 36″ x 45″

With a reduction ratio of 20 or 30 to 1, this unit assures high capacity of desirable cubical shaped aggregate, which needs little or no further reduction.

IOWA MANUFACTURING COMPANY

Cedar Rapids, Iowa, U. S. A.

...and the NEW DAVIS 210 BACK-HOE is the ONLY MACHINE in the World— that can do this job!

When it comes to digging a footing or any other trench for service lines, waterproofing, etc., right alongside another building, you have only two choices – either expensive hand digging or fast, economical flush digging by a new Davis 210 Back-hoe. The new Davis 210 can be mounted at either end of the frame – as well as at the center so you can dig flush with walls, fences, etc. Its 200° swing lets you dump far enough from the trench that removal of the excess pile with the Davis Loader, America's quality loader, is easy.

It's all made possible by the exclusive rotary hydraulic boom swing cylinder along with the other features which make Davis the world's largest selling back-hoe – features like the 7000 pounds of breakaway for digging in asphalt or frozen ground, independently controlled hydraulic stabilizers, five minute detachability, and revolving seat which lets the operator always watch his work. Of course with the Davis Loader you have an unbeatable combination... all for far less than you would expect to pay in comparison to other makes.

DISCOVER DAVIS FOR MORE PROFIT

Davis Loaders and Back-hoes are available for all popular makes of tractors, and sold and serviced everywhere in the U. S. A. and Canada by better dealers. For the name of your nearest dealer call Western Union by number and ask for Operator 25... or write...

MID-WESTERN INDUSTRIES, INC.
1009 SOUTH WEST STREET DEPT. N WICHITA 15, KANSAS

On the Massachusetts Turnpike

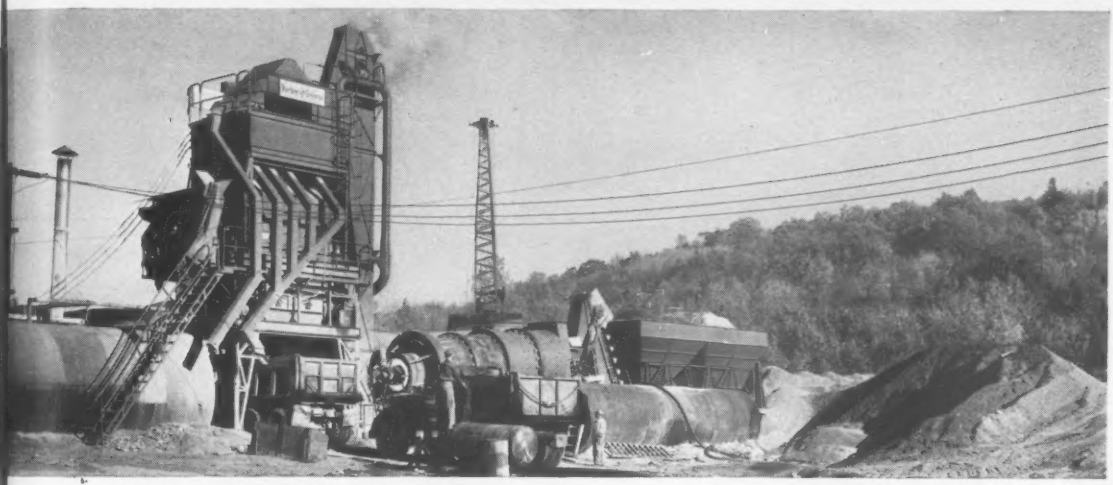

Bigger tonnages with BatchOmatics

200 tons per hour—that's the kind of production Alexander Construction Co. is getting from its 6000-lb. BatchOmatic. This plant will produce 115,000 tons for a 3.4-mile section of the Massachusetts Turnpike.

Forty miles eastward a 4000-lb. BatchOmatic—one of three owned by Bayer & Mingolla—consistently produced at maximum tonnages.

Designed from their original conception for automatic operation, all three Barber-Greene BatchOmatic plants boost production, cut costs and expand the market.

Faster paving with a finisher team

Near Blandford, three Barber-Greene Finishers pave in echelon, laying 10′, 12′ and 16′ strips simultaneously. A fourth finisher paves interchanges.

Barber-Greene Finishers have always had the traction, maneuverability and control to take any job in stride.

And today's improved finisher has more power, paves faster, travels faster with lower maintenance cost. This is the finisher that sets the pace for quality paving over the world—the finisher that is now paving its second million miles—more than all others combined.

Write for information on the world's most modern equipment for building asphalt roads.

57-2-WB

Barber-Greene BG

AURORA, ILLINOIS, U.S.A.

CONVEYORS . . . LOADERS . . . DITCHERS . . . ASPHALT PAVING EQUIPMENT

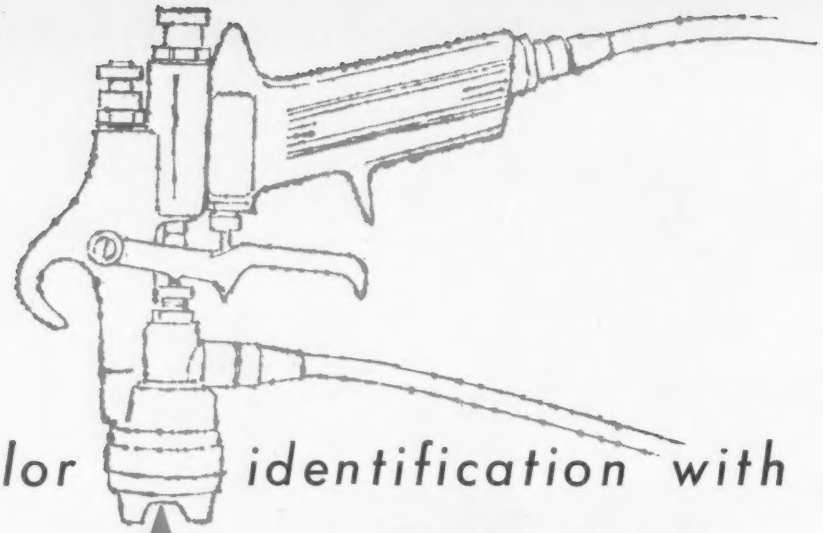

color identification with

Tousey **DURACOTE** or

SPEED DURACOTE Tough, durable, non-fading Duracote surfaces will endure endless punishment from all sorts of exposure and still retain their original color month after month. These dependable finishes are being used by manufacturers of heavy-duty road machinery to maintain product identity through color.

For a finish that guarantees constant surface protection and color identification — choose Tousey Duracote, or Speed Duracote.

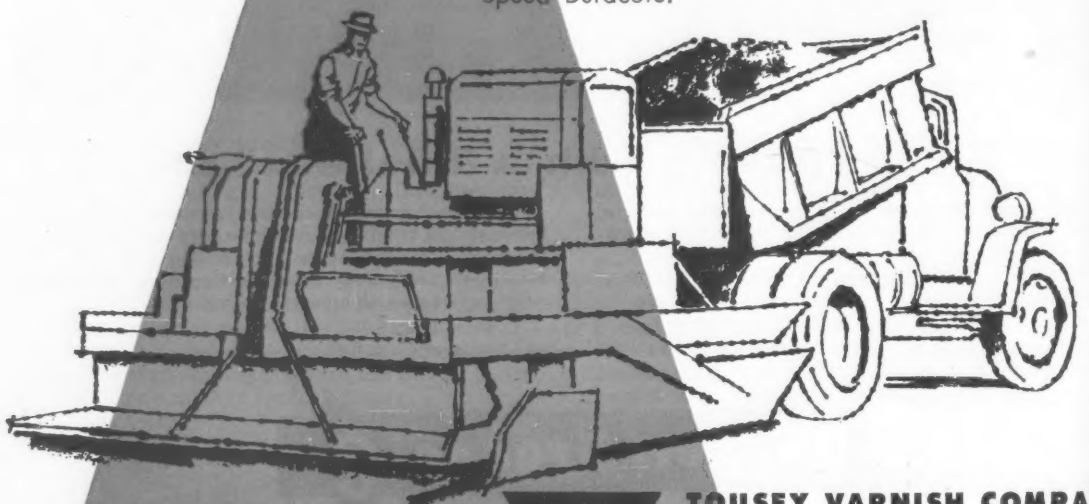

TOUSEY PRODUCTS

DURACOTE for DURABILITY

TOUSEY VARNISH COMPANY
520 West 25th Street, Chicago 16, Illinois
VIctory 2-2200

29
SALES AND SERVICE LOCATIONS

Birmingham, Ala.; Los Angeles and San Francisco, Calif.; Denver, Colo.; Washington, D.C.; Kellogg, Idaho; Centralia and Chicago, Ill.; Boston, Mass.; Detroit, Mich., Duluth and Minneapolis, Minn.; Butte, Mont.; St. Louis, Mo.; Carlsbad, N.M.; New York, N. Y.; Cincinnati and Cleveland, Ohio; Forty Fort, Philadelphia and Pittsburgh, Pa.; Knoxville, Tenn.; Dallas and El Paso, Texas; Salt Lake City, Utah; Seattle and Spokane, Wash.; Fairmont and Huntington, W. Va.



Get complete information on rotary air-blast drilling ... write for Bulletin 153-24

A FAST PORTABLE DRILL FOR BLAST HOLE DRILLING ... THE *Joy* 225 BLASTAIR

Here's a drill that really gets around . . . as fast as any truck . . . yet punches down holes like the biggest heavy drills. The 225 Blastair operates on the rotary air-blast principle, (continuous pressure cutting, with a continuous blast of compressed air for cleaning) developed and proved by Joy. This faster method of blast hole drilling eliminates lost holes, and drills smooth, parallel-walled holes . . . easier and safer to load. The 225 drills dry . . . eliminates piping layouts or water haulage —operates all year 'round without worry about freezing water lines.

In quarrying, stripping, and large cut-and-fill operations, the 225 has proved to be the answer to drilling problems . . . it may be the answer to your problems. Write to ***Joy Manufacturing Company, Oil Field Drill Division, P.O. Box 35326, Airlawn Station, Dallas 35, Texas.*** In Canada: *Joy Manufacturing Company (Canada) Limited, Galt, Ontario.*

WSW 06468-153

JOY **EQUIPMENT FOR CONSTRUCTION ... MINING ... QUARRYING**



PORTABLE AND SEMI-PORTABLE AIR COMPRESSORS • ROCK DRILLS • WAGON DRILLS • DRILL BITS • BACKFILL TAMPERS • SPADERS
PAVING BREAKERS • SHEETING DRIVERS • DRIFTERS • PORTABLE HOISTS • FANS AND BLOWERS • PORTABLE SAFETY LIGHTING

THE RING TRICK

The time-honored ring trick always keeps the audience guessing, and if you like guessing games, perhaps you would like to guess how many tons of steel joint rings went into the construction of the City of Tulsa's 275,000 foot 72″ and 66″ Lock Joint Concrete Pressure Pipe water supply line. You'll find the answer concealed in the picture above.

But there's no guessing where the fabrication of these joint rings is concerned. Every ring used in the making of Lock Joint's flexible, self-centering and completely watertight Rubber and Steel Joint is carefully cut, rolled and welded. Then, to assure absolute roundness and exact diameter, every ring is sized on an hydraulic press to such close tolerances that any spigot ring will fit perfectly within any bell ring of like nominal diameter. This is only one of the many quality control measures which go into every phase of the manufacture of LOCK JOINT CONCRETE PRESSURE PIPE, to assure to the customer the highest type pressure pipe obtainable.

LOCK JOINT PIPE CO.

East Orange, New Jersey

Sales Offices: Chicago, Ill. • Columbia, S. C. • Denver, Col. • Detroit, Mich. • Hartford, Conn. • Kansas City, Mo

Pressure • Water • Sewer • REINFORCED CONCRETE PIPE • Culvert • Subaqueous

ENGINEERING NEWS-RECORD

Vol. 158 No. 17 April 25, 1957

Number of copies printed this issue: 76,693

CONTENTS

NATIONAL AFFAIRS

Are Road Engineers Being "Frozen"? 25
Hangars Fit Contours of Big Planes 27
Garden State Parkway: Safest Tollroad 28
Report on Sonic Boom Damage 28
Competition for Sun-Heated Homes 28
Alberta College Starts Engineering School 29
20 Tons of Beams Go Up in One Piece 29
Redevelopment Pays Its Own Way 30
Load Test During an Earthquake 32

FEATURES

Building Frame Is Aircraft Test Rack 36
For Chicago: $113 Million Bond Issue 45
Finisher Meets Tight Tolerances 49
Williamsburg Guards Its Character 54
Where the School Dollar Goes 65

NEW PRODUCTS

Ceiling Lighting Is Packaged Unit 73
Air Filter Extends Equipment Life 73
Nut Corrects Bolt Misalignment 73
Excavator Takes 2 cu. yd. Dipper 73
Heat Pump Cuts Costs, Space Needs 73
Hydraulic Sweeper Speeds Operations 74
Attachments Boost Loader Versatility 74
Concrete Cutter Has More Spindle Power 74
Pipe Joint Approved for 350 psi 78
High Speed Transmission Reduces Fatigue 78
Publications 80

INTERNATIONAL

Spiral Market to Wind Around Hill 83
Concrete Dome Will Be Partly Precast 83

RESEARCH

Report on Chicago Water Development 84
Film to Slow Evaporation Is Tested 85

MEN AND JOBS

Mississippi River Engineer to Retire 91
New Engineering Dean for Connecticut 91
Kentucky Engineering Dean to Retire 91
Pipe Association Names Engineer 91
Director Named for Corps Laboratories 91

BUSINESS AND FINANCE

Canadian Awards Are Down 131
Tollroad Extension May Be Delayed 131
Cement Shipments Go Down 131
Construction Market: San Diego 132

LABOR

Teamsters Condemn Beck Suspension 136
Apprentice Deficit Still Exists 137

Reader Comment 11
Calendar 14
Washington Observer 23
Obituaries 94
Legal 99
Unit Prices 102
Materials Prices 104
Construction Reports. 108
Scoreboard 129
Editorials 152

Back issues of ENGINEERING NEWS-RECORD *are generally available for the previous six months. Price 35¢ each copy except Annual Cost Issue. Semi-annual indexes will be sent on request.* ENGINEERING NEWS-RECORD *is also indexed in Industrial Arts Index and Engineering Index.*

THE CONSTRUCTION WEEK

REBOUND IN PRIVATE WORK—The upturn in private heavy construction forecast by ENR (March 28, p. 21) apparently has arrived. For the second consecutive week, private awards have climbed impressively. Moreover, the rise has been well balanced. Industrial building, commercial building and even private mass housing are pulling together to lift the private construction market from the bottom of a deep slump.

NEW WAGE DEMANDS—The Associated General Contractors' Northern and Central California Chapters, already faced with wage demands from carpenters and laborers ranging from 40½ cents to 57½ cents an hour, have now heard from two more crafts. Cement masons are asking for 48 cents—25½ cents in wages and 22½ cents in fringe benefits—and the teamsters hope to get 25 cents more in wages for most classifications plus 30 cents for holiday, pension and vacation funds. Meanwhile, in Miami, Fla., where carpenters are pressing for 47 cents more spread over two years, roofers have won a package increase of 63 cents an hour in a two-year contract.

LONG SAULT'S LAST THROES—It was two weeks ago that contractors dumped what they thought was the last load of fill into the St. Lawrence River where their cable-way-placed cofferdam was to shut off flow in Long Sault of the International Rapids near Cornwall, Ont., but the mighty rapids had raged for too many eons to give up so readily. The contractor had to drop steel frames into the fast stream to hold the boulders being placed. And last week there were still reportedly 315,000 gpm getting by the husky cofferdam. But for the romantic Long Sault, it was all over. The St. Lawrence was, at last, a controlled stream.

ENGINEERING CENTER FOR CLEVELAND—Already assured of more than half the cost, the Cleveland Engineering Society will start work immediately on a $1½ million engineering and scientific center. Demolition on the site is already under way and formal groundbreaking ceremonies were held this week. With about 50,000 sq ft of floor space—approximately three times the space in the Society's present quarters—the new building will provide meeting facilities for 50 odd engineering and technical groups.

ANOTHER HOME FOR THE DODGERS—Robert Moses, New York City's Park Commissioner, proposed informally last week that the city make available part of the old World's Fair grounds as a site for a new stadium for the Brooklyn Dodgers baseball team. Roofed with a plastic dome, the new stadium would seat 50,000 and would cost about $12 million.

DEPENDABLE CATERPILLAR POWER HELPS CHANGE NIAGARA'S COURSE

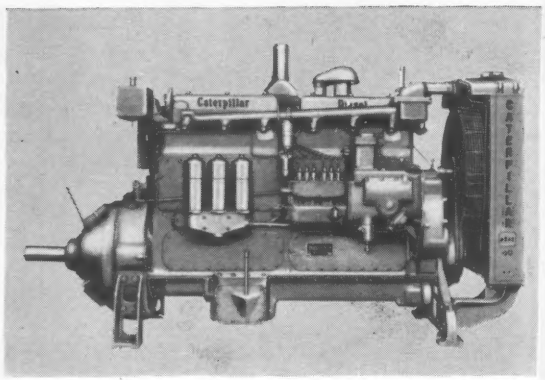

Caterpillar-powered equipment is helping slow Niagara's famous Bridal Veil Falls to a temporary trickle. This CAT*-powered Koehring crane is swinging two men with sandbags to build a diversion dam in the Niagara River. Walter S. Johnson Building Co., Inc., of Niagara Falls, N. Y., is building a total of three dams. The objective is to direct the river flow away from two islands, which are badly water-eroded, so that overhanging precipices can be cut away.

"We've been in business 33 years," says Jack B. Johnson, vice president, "and when we discovered Cat quality, we stayed Caterpillar owners. They're dependable, durable machines." The Johnson company is 100% Caterpillar equipped. They have a D315 in another Koehring plus four Caterpillar track-type Tractors, in addition to the D13000 in this rig.

The D13000's reputation as a tough, long-wearing engine is now being carried on by its new modern version, the D342, which develops even more horsepower from the same size engine. The D342 is only one of the new models in the Caterpillar line of modern Diesel Engines, now available with maximum output capacities up to 650 HP.

All these new power plants share the advantages of Caterpillar's sturdy four-cycle construction. There's no need to clean air boxes or cylinder ports, or to tinker with fuel injection adjustments. These dependable yellow engines have such long-life features as "Hi-Electro" hardened crankshafts, special aluminum alloy bearings, and highly effective oil, air and fuel filters.

Your Caterpillar Dealer will tell you about the Caterpillar Engine that can do most work at lowest cost for longest time on *your* job. See him when it's time to repower—and specify Caterpillar power when you order new excavating equipment from a leading manufacturer.

Caterpillar Tractor Co., Peoria, Illinois, U. S. A.

CATERPILLAR*

*Caterpillar and Cat are Registered Trademarks of Caterpillar Tractor Co.

MODERN
HEAVY-DUTY POWER

WASHINGTON OBSERVER

- **Eisenhower gestures to cut budget**
- **Compromise on TVA freedom in sight**
- **Democrats box Administration on AEC**
- **More mobility for mortgage money**

● **Eisenhower's gesture to the economy wave** will (1) delay some military construction of defense installations, and (2) not cripple progress on Army civil works projects already under way. The President's main concern is to reduce the amount of money Congress appropriates to keep programs going, rather than to reduce materially actual spending in fiscal 1958.

New money earmarked for the civil works projects will be delayed, but Army Engineers say actual work will not. Rather, the requests were scaled down after a study showed the money was not immediately needed.

Congress probably will go along with Eisenhower; local interests will be assured the appropriations cuts will not affect going projects—at least until the next session of congress.

—

● **A break may be near on giving TVA authority to expand its plants.** Both the Administration and the Democrats want it to have authority to issue its own revenue bonds to finance new steam plants as they become necessary to serve TVA area customers. Big fight has been over how free TVA is to be of Congressional veto on its expansion plans.

Sen. John S. Cooper has come up with a compromise which would authorize TVA to finance $750 million of plants over the next five years through revenue bonds—leaving it to the future to decide what sort of "permanent" authority the agency should have.

—

● **The atomic energy construction program is in a real political bind.** The Democrats in Congress have the Administration somewhat over a barrel.

Each AEC project may have to go through the appropriation procedure as do other public works projects, if the Democrats carry out their threat.

Democrats may drop this talk if Republicans agree to a big program of federal plants—the $400 million Gore bill that was opposed by the Administration last year.

—

● **Areas short on money for housing mortgages are going to get some relief.** Indeed, a transaction to move savings and loan funds from New England to California was made this week. The deal is permissible under a recent government regulation allowing purchase of conventional mortgages outside the old 50 mile radius. The Worcester, Mass., Federal Savings and Loan Assn. is supplying mortgage money to the Westchester Federal Savings and Loan Assn. in Los Angeles. The new regulation still requires local institutions to put up half the money.

More such arrangements are in the works. Officials estimate a flow of more than $100 million to become available under the new regulation within a year.

US RUBBER V-BELTS

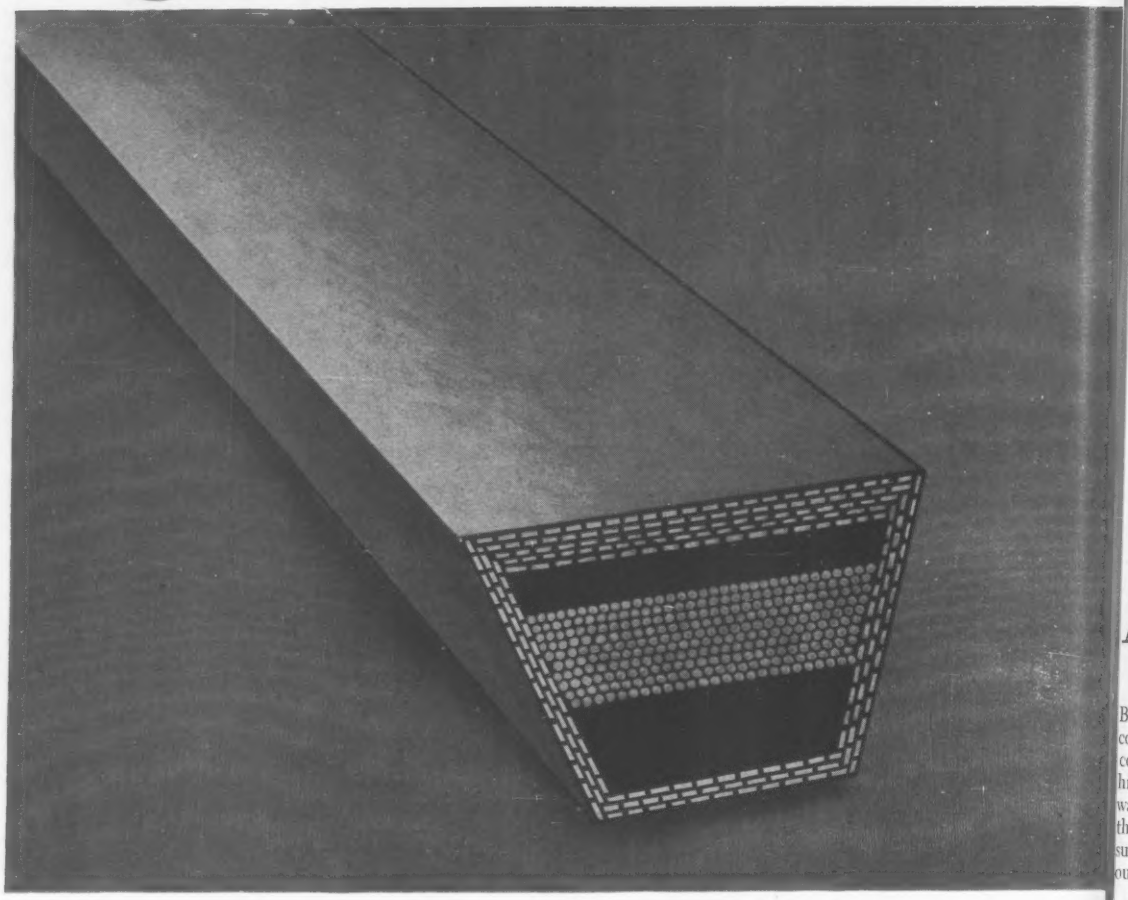

QUALITY—
your Biggest V-Belt Saving

Exclusive Equa-Tensil cord construction; new curing methods; the facilities of the largest and most modern plant devoted exclusively to the production of endless transmission belts—these are some of the factors that bring to the construction and quarrying industries the one V-Belt whose quality assures you of getting the most V-Belt for your money.

This quality is built into every U.S. V-Belt. It contributes greatly to the long life and efficient operation of off-the-road equipment, compressors, generators, crushers, conveyors—any place where power transmission belts take heavy shock loads.

A complete line of V-Belts, plus expert engineering assistance, is available at any of the 28 "U.S." District Sales Offices, at selected distributors, or write us at Rockefeller Center, New York 20, N. Y. In Canada, Dominion Rubber Co., Ltd.

US RUBBER Mechanical Goods Division

United States Rubber

BPR has suggested an "anti-pirating" clause in road department-consultant contracts

There are those who object to it . . .

- **It is unconstitutional; it amounts to a manpower freeze**
- **States are using it too broadly**

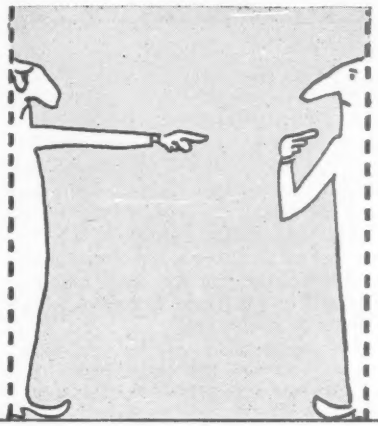

There are those on the defensive . . .

- **BPR says the states asked for it; language of the clause needs explaining**
- **Most big consultants accept it**

Are Highway Engineers Being "Frozen"?

This week there was pressure on the Bureau of Public Roads to delete a contract clause it has devised to keep consultants from hiring away state highway engineers. But the bureau wants to keep the clause; practically all the states want it; and only a rare consultant can be found who voices vigorous objection.

Effect of the contract clause, now used by virtually all states and accepted by, or imposed upon all consultants designing federal-aid highways, is to prevent such consultants from hiring for full or part-time work any civil service highway personnel — federal, state, county or city.

State highway departments generally claim they need such protection against loss of engineering personnel, although some admit this clause seems too restrictive.

Louisiana is the only state known to balk at its use.

• **Consultants pro and con**—Consultants contacted for comment by ENR last week were mostly inclined to go along with the clause, although a majority would agree when pressed that those who oppose it are justified. The sole dissenter found called it a most "unhappy" clause—"We have no right to freeze a man in his position." This spokesman's firm has fought the clause, but unsuccessfully.

The National Society of Professional Engineers has been outspoken in recommending its deletion. Although the matter has been referred to the Professional Practice Committee of the American Society of Civil Engineers, no definitive action has been taken by that group.

For its part, the Bureau of Public Roads says that there is widespread confusion about the purpose of the controversial contract provision. A clarification is expected to be issued by BPR shortly.

A BPR spokesman claims the states wanted such a clause, but wanted to have it on a higher-than-state level so they asked the bureau to handle it. Primary purpose, according to BPR, is to stop "letterhead" consultants—those with little or no staff—from getting highway design contracts and then hiring engineers later. Mainly, they would have to draw from state highway departments and BPR, it is assumed. Also, the device is geared to prevent going consulting firms from hiring state engineers to expand their staffs after they get contracts.

Frank Turner of the bureau says the clause is aimed at applying only to specific contracts and is not intended to extend to other work being done by consultants, even though the other work is financed with federal-aid money. Consultants, however, claim the clause does apply to other work in actual practice.

Most states are using the clause and like it, says Mr. Turner. However, it is strictly voluntary by the state and BPR does not mandatorily require it. BPR justifies the clause on grounds that states want it, and that it is up to them if they use it.

• **One state opposed**—R. B. Richardson, Director of the Louisiana State Highway Department, told ENR last week he will not stand in the way of any engineer in his department bettering himself by taking a job with a consultant. "If we can't make employment with the state attractive and keep it in competition with private engineering then we shouldn't resort to regimentation to keep our engineers," says Mr. Richardson. He admits that anti-raiding clauses had been used in the past, but he does not intend to use this present clause unless forced to do so by BPR.

Behind the clause is the BPR belief that better highways result if the state departments handle the work. It is the bureau's stated recommendation that all possible work be kept and done by the states themselves. It is reasoned that the states have more technical knowledge and facilities to draw from, and can experiment more with new designs and materials. Consultants, on

. . . BPR's "anti-pirating" clause in dispute

"The consultant shall not engage, on a full-or-part-time or other basis during the period of the contract, any professional or technical personnel who are or have been at any time during the period of the contract in the employ of the Bureau of Public Roads or the highway organization of any state, county, or city, except regularly retired employees, without the written consent of the public employer of such organization."

the other hand, are working within a time and dollar figure and changes normally cut into their profits so they don't bother too much about carrying out experiments.

As a rule of thumb, BPR figures that work done by consultants normally costs about twice as much as when it is done by state departments. [BPR spokesmen earlier have said it costs three times as much (ENR Nov. 8, 1956, p. 28) however, consultants will argue with this statement. It boils down to a question of how costs are figured —how much for state overhead, for example.]

It remains obvious that the Bureau of Public Roads wants the states to do the bulk of the highway engineering. It expresses concern over a few states that are relying heavily on consulting engineers now.

According to the law, states must have adequate staffs before they qualify for federal-aid money, but the law is vague on just where the break point is —what is an adequate staff?

• **NSPE's objections**—Paul Robbins, Secretary of the National Society of Professional Engineers, openly opposes the contract clause, and the NSPE has gone on record as being against it. His arguments are that the clause amounts to a manpower freeze. In practice, Mr. Robbins says that states are slapping the clause in all contracts and telling consultants that the BPR requires them to do so. Also, the clause is being extended to cover other types of work, making a generally confused and unworkable situation, he claims.

As an example of how far the manpower freeze can be carried—even beyond a full, broad application of the clause that controls hiring of anyone in a civil service highway job—there is this story told of one consultant's dilemma:

He thought he had lined up some new recruits from the senior class in a certain college when he was told, "hands off." The state's highway department, for whom he is doing some consulting, made it plain that it would have first recruiting crack at those students.

NSPE is waiting for the anticipated change or clarification to come from BPR. If it doesn't meet with their approval, they plan to protest again. Tactics will be to focus public attention on the matter and take it to Congress, either for pressure or a change in legislation.

The answer to the situation, according to Paul Robbins, is not a restrictive contract clause, but for states to hike the salaries of their engineers high enough to hold them.

No one has said as much, but a strict compliance with the clause looks like a back door approach to possible wage controls.

• **Restricts competition**—Aside from being in effect a wage control device, the anti-pirating measure can serve also to control competition in the highway consulting field, by making it hard for new firms to hire staffs. Established consultants, who find the clause proper and reasonable as far as their own business operations are concerned, declare that it all depends on the point of view: If they were small firms looking to enlarge, they might object strenuously. And, if one partner in a large firm were still in the state highway department where he spent many years, he'd have still another view of the situation, he claims.

Michael Baker, Jr., Rochester, Pa., consultant now designing millions of dollars of highways for six eastern states, was as recently as 1943 on the outside of the highway field, looking in. Now that he is in, he has no business objection to the hiring clause, but he says he can understand the roar that has gone up about it. He says that **if enforceable**, it is an unreasonable clause.

Several consultants blame BPR's apparent conviction that consultants increase the states' engineering cost two or three times for this effort to prevent consultants from taking men, and therefore work, out of the highway departments. And all deny the claimed cost differential. "We're too happy and busy to object to these BPR claims on costs," says Michael Baker, Jr., but he points out that his first highway job was gained by offering to design Penn Lincoln Parkway for exactly what the state had figured its engineering would cost. He claims he broke even when the $10 million job grew to $50 million worth and his $549,000 final fee was a scant 1%.

• **The states' reply**—For the states' part, there are several who report they are raising salaries to the point where turnover is no longer a problem.

L. P. Zimmerman, new Minnesota Highway Commissioner, credits past pay raises and a hoped-for raise now in the works that will bring total increases since 1955 to 32%. He also favors the federal clause.

Arizona is another state that credits pay raises for a stabilizing manpower situation.

Missouri's assistant chief engineer J. Corbett believes some such restriction on raiding of highway agencies is needed, but he feels the federal clause seems too restrictive.

California remains unaffected by it all. Director of Public Works Frank B. Durkee very strongly favors the provision, but under state law no consultants are used in the state as long as its Division of Highways can get men. There was an unsuccessful attempt to change this situation last Election Day, but it stands: "We haven't used consultants except on toll bridge projects," says Mr. Durkee.

South Carolina's Highway Commissioner Claude R. McMillan says his state hasn't used consultants on highway design—only bridges. (And on bridge contracts, the maverick McMillan says he'll continue his state's policy of taking competitive bids on engineering—a policy that got him ousted by ASCE a few years ago.)

• **Old story, same ending?**—Unwritten agreements restricting hiring are not new—nor are they limited to the highway department-consultant relationship. But in this field such agreements have existed openly for years. One consultant says he recalls stipulations back as far as 1942 in contracts with state highway departments. These early agreements, however, were concerned solely with protecting the client from loss of personnel to his engineer. The new clause born in a BPR memo to the states early this year obviously can widen the "off-limits" areas for recruiting consultants to all highway agency engineers, anywhere.

There were 20,500 engineers in the state highway departments at last BPR count. On top of this there were 26,000 engineering aides and technicians. BPR has no estimate of how many engineers work on highways for county or city agencies, but it knows it has 1,100 engineers.

Whatever the total, it may or may not be effectively frozen by the questionable clause.

To provide weather protection and easy accessibility to all parts of aircraft during maintenance operation . . .

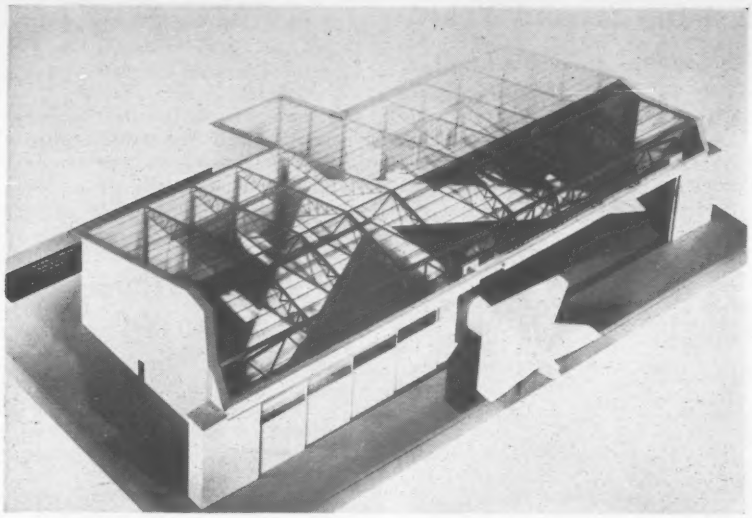

Hangars Fit Contours of Big Planes

Increasing complexity and ever-varying shapes of military aircraft have led the Air Force to develop a custom-tailored structure, or maintenance dock, designed to fit the contours of specific groups of planes.

In the past, the Air Force has had to build huge, expensive hangars equipped to handle all types of planes or else use temporary facilities that left plane and ground crew exposed to the weather during strip down or did not provide easy access to all parts of planes at the same time.

The new hangar will service the B-52, C-124 and other planes of similar size and shape. It is equipped with movable platforms shaped to fit each of the aircraft types it handles. It will give complete weather protection and still provide easy access to those parts of the planes requiring the 8 hour, post-flight maintenance check or the periodic, week long, strip down maintenance procedure.

Among the facilities included in the dock are adjustable fuselage closures, two engine removal doors, a built-in carbon-dioxide fire-extinguishing system and an electrically operated bridge crane that will be used for the the removal of airplane engines.

The structure is 85 ft deep, with a projecting nose section of 30 ft. It has a door opening of 198 ft and a door height of 28½ ft, with a tail gate clearance of 32 ft.

Designed and erected by Luria Engineering Co., the dock is a steel-framed structure, enclosed with galvanized steel sheets and insulated with glass-fiber panels.

The new maintenance hangar can be erected in about two months at a cost of less than $200,000.

TAIL of a B-52 is the only part of the plane not enclosed.

NOSE fits into the rear hangar extension. Doors are for engine removal. The small side shed houses auxiliary power equipment.

First for Second Year

Garden State Parkway is safest U. S. tollroad

An official survey has marked New Jersey's Garden State Parkway as the safest of the nation's major tollroads for the second year in a row.

The American Bridge, Tunnel and Turnpike Association reported the fatality rate on the tollroad—which spans the length of the state—was 1.2 per 100 million vehicle miles in 1955 and 1.3 in 1956.

The parkway record for the first quarter of 1957 is two fatalities involving pedestrians, from an estimated volume of 10 million vehicles.

The parkway also rated tops for the lowest accident rate among the tollroads, with an accident rate of 58.2 per 100 million vehicle miles in 1955 and 69.1 per 100 million vehicle miles in 1956.

The national fatality rate for all tollroads averaged 3.8 for 1955 and 3.1 last year, while the accident rates were 153.5 for 1955 and 140.0 for 1956.

Katharine E. White, Chairman of the New Jersey Highway Authority, which built and operates the superhighway, attributes the parkway's safety record to the engineering design of the highway and the general cooperation of the public.

Pennsylvania Governor Seeks Billboard Ban

If Pennsylvania's Governor George M. Leader has his way, there will be no billboards allowed within 750 ft of any Pennsylvania road in the interstate highway system.

In asking the state legislature to promptly enact restrictive measures, the governor said that failure to do so will result in roads that are "marred by the disfigurement and distraction of billboards."

The administration contends that the ban can be enforced by the police power of the state rather than by the complicated highway zoning regulations proposed in the past.

Anticipating "a very powerful opposition lobby," the governor has appealed directly to the people of the state to tell the legislature that they want no billboards beside the new roads.

Flood Control Program Aim of Kentucky Study

A three-month study for developing a broad program of flood control and rehabilitation in eastern Kentucky will give special attention to land-use regulations under federal flood-insurance legislation. The study is being financed by the state and federal government on a 50-50 basis, with David A. Grossman of Blair Associates, Providence, R. I. heading the seven-man team of planning and development experts.

The study will also tie in with one being conducted by the state's Legislative Research Commission to determine what legislation is needed to enable property owners to buy federal flood insurance.

Sonic Boom Damage

Only glass breakage is likely, AF officer says

Pressures exerted on ground structures by shock waves from planes flying at supersonic speed are too low to cause structural damage, according to Col. Roy R. Walker, chief of the Air Force's Community Relations Branch. Window panes, however, may break.

In a talk at a Building Code Conference held at St. Louis University, Col. Walker reported on pressures measured in tests of planes at varying altitudes.

"Where airplanes have dived from 35,000 ft and pulled out at 25,000 ft, we have measured no pressure greater than 5 psf on the ground," he said. "Even when the aircraft descends to 10,000 ft, the recorded pressure does not reach 10 psf. Rarely are faster-than-sound operations carried out at altitudes lower than 20,000 ft. This would mean that we would not expect sonic boom pressures greater than 5 psf to be observed on the ground."

Col. Walker contended that observations of the effects of atomic explosions indicated that even the flimsiest structures were capable of resisting at least 70 psf. And block, brick and frame constructure can withstand pressures of about 150 to 300 psf before damage ranging in magnitude from plaster cracks to wall and roof cracks occurs.

The greatest measurement during the Air Force tests was obtained on a mountain top with an airplane flying 280 ft away. That pressure was 33 psf.

• **Negligible vibration**—The tests also showed that the sonic boom is equivalent to a frequency of about 3 cycles per second. Most structural elements of houses have natural frequencies ranging from 5 to 40 cps, Col. Walker said, and therefore there is no tendency to vibrate at fundamental frequencies or harmonics. It is even more difficult to make the ground vibrate with a sonic boom.

"Glass, however, is another matter," Col. Walker pointed out. "The methods by which it is manufactured are apt to produce internal stresses. Methods of installation and workmanship employed are apt to produce additional internal stresses due to its being bent ever so slightly when installed. Thus, a sharp blow, even though a light one, may shatter the glass. This is not to say that sonic booms will always break windows, because they definitely will not."

Homes Heated by Sun

Design contest begun for solar-heated home

An international architectural competition to obtain designs for a solar-heated residence was announced by the Association for Applied Solar Energy of Phoenix, Ariz.

A $2,500 award and a contract to supply architectural services for the actual building of the winning design are offered as first prize. Awards of $1,500, $750 and $500 will be made for runner-up designs.

The competition, which will be open to architects, designers, and students throughout the world, will close on August 15, 1957.

Prospective contestants may obtain the detailed program for the competition from James M. Hunter, 1126 Spruce St., Boulder, Colo.

The program contains the requirements the contestants must meet, as well as the specifications for the residence and the Phoenix area climate data. A swimming pool and its heating equipment will be included as a part of the design.

The prize-winning residence will be the focal point of a Solar House Symposium to be held in Phoenix late in Sept., 1958.

Oil Firm Lets Contract For Coast Headquarters

Tidewater Oil Co. will begin construction immediately of a $10 million headquarters building in Los Angeles. The contract has been awarded to C. L. Peck, Los Angeles builder and realtor.

The structure will have 427,000 sq ft of space, making it one of the largest commercial office buildings in southern California. It will have a 10 story central tower, and the rest of the building will be 6 stories high, with provision for later expansion to 12 stories.

A 3-level basement, with complete service station facilities, will provide parking for 400 cars.

The steel frame of the building will be bolted. Exterior treatment will be white marble with stainless steel spandrels. The street-floor facade will be black granite.

Claud Beelman & Associates, Los Angeles architects, designed the project.

Goal: Road Engineers

Alberta college starts new engineering school

In the hope of finding cost-saving solutions to highway problems, expansion of research projects will be carried out this year at the University of Alberta, Edmonton, under a new program of post-graduate instruction in highway engineering.

Announcement of the program—first of its kind in Canada—was made in the Alberta government's official publication, "Within Our Borders". The new engineering school will operate under the direction of Dean R. M. Hardy of the Faculty of Engineering, and the research aspect of the program will be in cooperation with the Research Council of Alberta. Two scholarships valued at $2,000 each already have been made available under the sponsorship of the Canadian Good Roads Association.

The overall program is designed to provide expanded facilities for advanced instruction for young engineering graduates "in preparation for any one of many positions in highway engineering."

The Alberta report pointed out that educational, research and extension phases were carefully combined into an integrated program after study of similar projects at various schools in the U. S. and Europe. Although specialized highway courses were available at the university before, they were not closely integrated with needs of the industry.

According to the government publication "research projects concerned with highway problems will be greatly expanded, and it is hoped the course will provide solutions to various problems resulting in substantial savings in construction and maintenance costs." During the new fiscal year expenditure for highway construction and maintenance programs in the western provinces of Alberta, British Columbia, Saskatchewan and Manitoba is estimated at $150 million.

The program will give particular attention to problems resulting from soil and climatic conditions peculiar to western Canada and the Far North. These include: compaction of soils; prevention of frost heaving of soils by chemical treatments; effect of cycles of freezing and thawing on strength of soils; treatments to improve the stability characteristics of base coarse gravels of types having exceptionally high affinity for water; and stabilizing factors of slides of a particular nature that occur along river valleys in northern Alberta, northeastern British Columbia and parts of the Yukon.

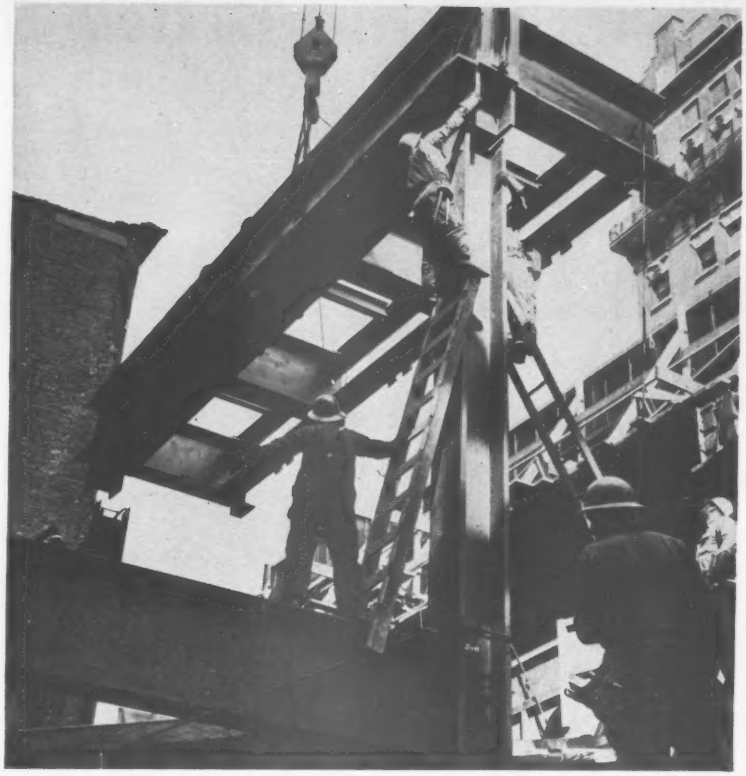

20 Tons of Beams Go Up in One Piece

Twenty tons of framing were erected in one piece recently for Deering Milliken Co.'s new 8 story welded-frame office building, now going up in New York. The heavy shop-welded assembly comprises a 31x7 ft section of the second-floor framing. It occurs above a section of the front of the building where bottom-story columns are set back 7 ft.

Shaped like an E but with four instead of three side projections, the welded unit has a main longitudinal girder 31 ft long and four 7 ft long cantilever stubs. The main girder is supported at its ends (see photo) by two of the set-back first-story columns. Floor beams corresponding in location to the cantilever stubs will frame into the main girder opposite the stubs. Second-story columns will bear on the stub extremities, imposing on each a load of about 294 kips.

The building originally was designed as a riveted-frame structure, but Turner Construction Co., the general contractor, exercised an option to substitute welded construction because of the proximity of recording and broadcasting studios.

The project was designed by Carson & Lundin, New York architects. Edwards & Hjorth, of New York, are the structural engineers. Schacht Steel Construction, Inc., of New York, is fabricating and erecting the steel. Schacht's assistant chief engineer, H. W. Lawson, designed the welded connections. Herbert S. Church is Turner's superintendent.

B&O Starts Construction Of $4 Million Fruit Pier

Construction of a new $4 million fruit pier for the Baltimore and Ohio Railroad is scheduled to get under way this month at a site south of Locust Point in Baltimore harbor.

The new pier, which will be a 1 story structure of steel and concrete, will permit simultaneous undercover loading of 63 railroad cars within the pier proper. The motor truck section is designed to permit entering and leaving without crossing the railroad sidings.

The terminal will be equipped with unloading and conveyor equipment specially designed to permit maximum speed and damage-free handling of bananas.

A contract for the substructure and foundations has been awarded to McLean Contracting Co. of Baltimore. Dredging of more than 500,000 cu yd to connect the new facility with the Ferry Bar Channel will be done by Arundel Corp.

Sacramento Redevelopment Pays

Sacramento, California's urban renewal program is combining vision, determination and financial ingenuity in a pattern that might encourage other slum-pocketed cities.

Progress has been uncertain at times; as recently as two and a half years ago, the city's redevelopment plans seemed fated to die from inertia and disinterest.

Now, a 15 block, $10.4 million urban renewal program is nearing the construction stage and another 35 block redevelopment is in the preliminary planning stages (see map below). What happened in two and a half years to transform a dying slum clearance program into one of the most dynamic in the nation?

For redevelopment officials, the program was often frustrating. A general bond issue proposal to pay local financing costs for the slum clearance program went down to a close defeat. This could have marked the end of Sacramento's slum clearance efforts. But the planners were determined not to give up. Revenue bonds, which legally could be issued on authority of the City Council alone, were rushed into the breach.

The sale of these bonds last August represented a pioneering step in public finance (ENR Aug. 30, 1956, p. 75). The idea behind the bonds was simple. A certain amount of taxes was collected annually by the city from a deteriorated area. Removal of slum structures and improvement with new private buildings would result in greater assessed valuations in the area and hence in greater tax collections. By continuing to turn into the city's general fund the same amount of taxes collected from the area before improvement, the city would have available "excess tax collections" that could be used to pay off revenue bonds necessary to finance the slum clearance. It was, in short, a way of making urban redevelopment pay its own way.

Because no other city had tried this approach, salesmanship was needed by the Sacramento officials to convince investors that the new bonds represented a safe investment. The salesmanship paid off. Sacramento sold $2 million of these tax allocation bonds to Blyth & Co. of San Francisco at a net interest cost of 4.498%.

Since the bonds will be retired from taxes collected on the greater assessed valuation when the redevelopment is completed, there will be no increased tax burden on local taxpayers. And, they will gain through redevelopment of a slum area where the cost of municipal services has been high.

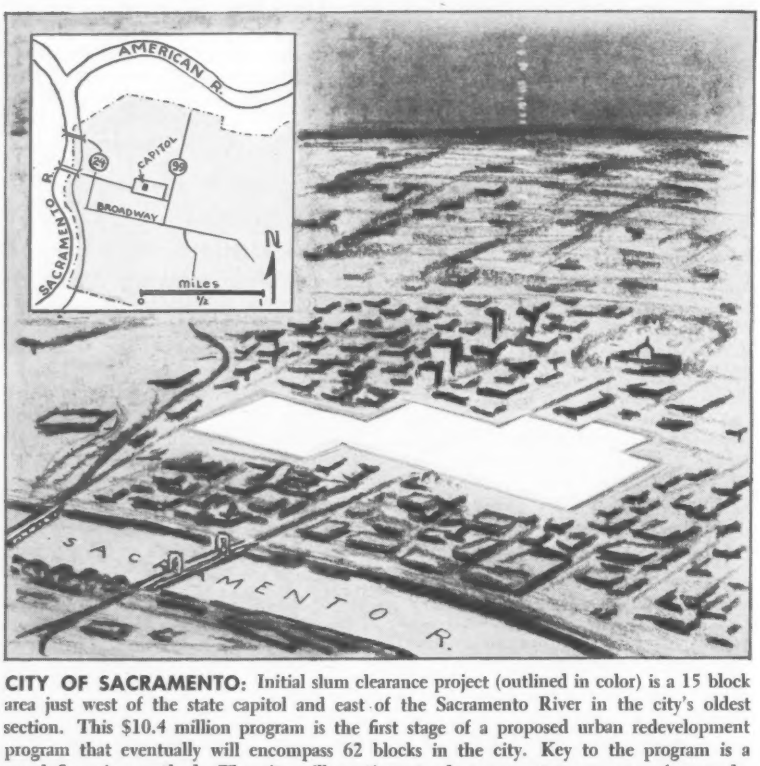

CITY OF SACRAMENTO: Initial slum clearance project (outlined in color) is a 15 block area just west of the state capitol and east of the Sacramento River in the city's oldest section. This $10.4 million program is the first stage of a proposed urban redevelopment program that eventually will encompass 62 blocks in the city. Key to the program is a novel financing method. The city will continue to draw present tax revenue from redeveloped area. But "excess taxes" will be used to retire revenue bonds.

• **Sparkplugs**—Two men stand out particularly in Sacramento's program, which is now rapidly nearing the construction stage. (Demolition of slum structures has been under way for several months and the first sale of land for redevelopment is expected in May or June.)

Sparkplugs of the urban renewal program are Fred G. Grumm, a civil engineer who is chairman of the Sacramento Redevelopment Agency, and Joseph T. Bill, a professional planner who is executive director of the agency.

Mr. Grumm retired a few years ago as deputy state highway engineer after 28 years of service with the state and since then has devoted much of his time to the Sacramento redevelopment project.

The Sacramento Valley Engineering Council earlier this year recognized Mr. Grumm's continuing public service, honoring him as the Sacramento Valley civil engineer who performed more civic work without compensation than any other member of the profession.

The program's other sparkplug, Joseph T. Bill, received a Bachelor of Science degree from Yale University and a Master's from Harvard. His studies, which included planning, architecture, landscape architecture and fine arts, have been utilized in the field of city planning since 1940. He became executive director of the redevelopment agency in Sacramento in August 1951.

While Messrs. Grumm and Bill are acknowledged as the driving forces in the Sacramento program, they are quick to share the credit.

Mr. Bill, for example, feels that a major factor in the program's success to date is that all five members of the redevelopment agency have been in the work since its inception and have been in agreement on a principal goal—removal of blighted areas that are located within the shadow of California's Capitol Building.

"All five agency members are going into their sixth year working together," Mr. Bill points out. "They have made one hell of a good team."

In addition to Mr. Grumm, agency members include Fred Read, vice chairman, and general manager of the California Fruit Exchange; Herbert Jaqueth, chief of the allocations division, State Department of Finance and one time

Its Way

city planning engineer; H. Harold Leavey, vice president of the California Western States Life Insurance Co., and Mrs. Pat Clark, a realtor who is active in civic affairs.

• **Before victory, a defeat**—These battle-scarred veterans of Sacramento's war against the slums grasped thorns before laurels. Sacramento's redevelopment project first was proposed as a 62 block slum clearance program in an old section of the city west of the Capitol Building and east of the Sacramento River, which forms the westerly boundary of the city. Early consultants on planning were Neutra & Alexander and Harold F. Wise (ENR March 1, 1951, p. 96).

Opposition to the plan developed quickly and became serious enough to cause delay in City Council action. Conceding a temporary defeat, the redevelopment agency trimmed its sails. As an alternative to the 62 block proposal, it selected a 15 block structural graveyard of dilapidated homes and flophouses.

An anti-redevelopment group fought this plan also. But, the City Council, backed by the redevelopment agency, powerful civic organizations and the city's newspapers, held fast against complete abandonment of a slum clearance program. This time, the agency was authorized to go ahead with its plan.

Encouraged, redevelopment officials waited for the financing. A general obligation bond issue election was called, with city officials hoping for a low interest rate. But, the bond issue failed. A two-thirds majority is required; a majority of voters approved the issue—but not enough.

Now the entire program was fighting for its life again. This time the resourceful redevelopment group came up with the idea of the revenue bond sale, even though it realized this would result in higher financing costs. From that point on, the program began to roll.

Novelty of the revenue bond financing was stressed last August by H. Harold Leavey, a member of the redevelopment agency, who commented that "this means of financing is new to California and to the United States. It was enacted into law in 1951 and specifically approved in an amendment to the constitution of California.

"Forecasts have been made that numerous other California cities will follow similar procedures. It is also expected that a number of other states will enact legislation in financing their redevelopment projects."

A LEADER in the Sacramento urban renewal campaign, Fred G. Grumm, shown at right, wins plaudits from two top officials, Mayor Clarence L. Azevedo, at left, and Gov. Goodwin J. Knight, center, as initial demolition begins for the first 15 block project.

• **Credits and cash**—Estimated gross cost of the project, which now involves 14 blocks (one block was acquired by the state for a state employees' parking lot), is $10.4 million. The redevelopment agency hopes to realize $5 million from sale of the cleared land, making the net cost of the project to the city about $5.4. million.

Through the Housing and Home Finance Agency, the federal government will provide up to $3.6 million as a grant. The balance of $1.8 million will be provided by non-cash grants (amounting to $502,000) in streets, electrical facilities and utilities provided by the city and the Sacramento Municipal Utility District; the agency bond issue will provide the remainder.

While dwarfed by some other urban renewal projects (such as New York City's mammoth proposed Lincoln Square redevelopment), this first Sacramento project could have a significance far beyond its cost.

When demolition of the first building for the project began recently, Gov. Goodwin J. Knight heralded the step as an indication of the city's brilliant future. As the city enters its second century, the governor sees a future in which Sacramento must cope with an influx of new residents and new industries, with redevelopment serving as a bridge between the past and the future.

As if to underscore the governor's theme, Sacramento's redevelopment officials were quick to pick up the bulk of the once-compromised 62 block plan.

The follow up to the initial project will be a 35 block redevelopment extending from 10th St. to the Sacramento River, flanking the project already under way. This would complete all but 10 of the original 62 blocks marked for renewal.

Mr. Bill is confident of this second stage redevelopment. He feels that success of the initial project will produce a more favorable climate for the second.

And, the director does not feel that the tight money situation will be an obstacle to the Sacramento program.

Investors who purchased the original revenue bonds still are interested in the program, he asserts. And, he points to the faith of Blyth & Co. in purchasing the untried bonds as an indication of future successful financing.

When the revenue bonds were sold, the SACRAMENTO BEE, a strong supporter of redevelopment, commented editorially:

"It is one thing for a planner, so often called a long-haired dreamer, to have faith in better, cleaner cities. But the haircut of the planner looks mighty practical when a cautious investor buys the plan with cash."

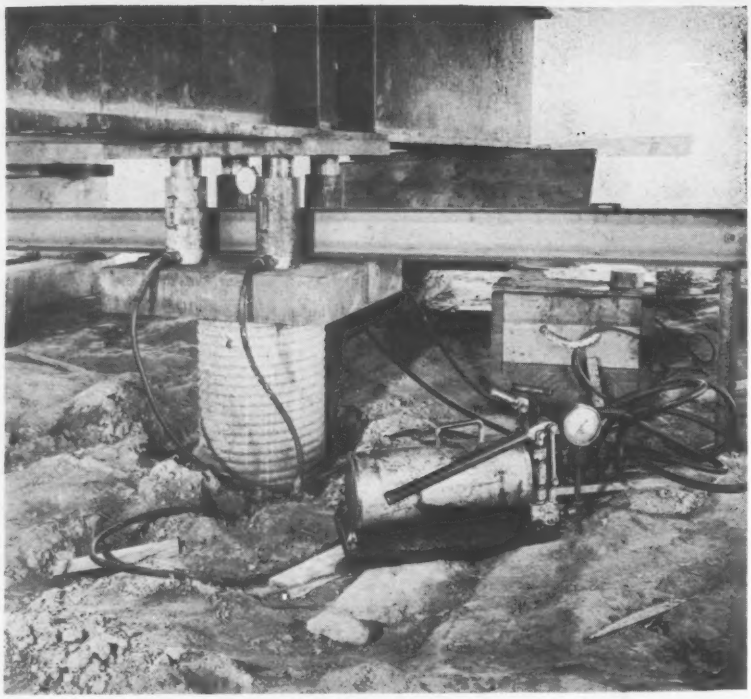

This pile test was different—it was a . . .

Load Test During an Earthquake

Pile load tests are not particularly unusual. But such a test during an earthquake is, which is why the facts with respect to a test being conducted at the San Francisco airport on March 22 are worth recording. At the time of the biggest shock, 60 tons of load was on the test pile. And the full 140 ton maximum load was in place during aftershocks, which measured as much as 3 on the Richter Scale as compared with 5.5 for the main shock. Yet, despite the location of the airport on bay front land almost directly opposite the presumed epicenter of the shake, which was on the ocean side of the San Francisco Peninsula, the resulting dynamic forces had no noticeable effect on the pile.

The test was being made on an 88 ft concrete pile cast in place in a step-tapered steel shell equipped with a 20 ft tip of 10¾ in. OD, ¼ in. thick pipe with a flat plate on the bottom.

Six hundred of these piles will be used to support a 310 x 360 ft double cantilever hangar being built for United Airlines.

The engineers designed the foundations for a 70 ton pile loading, and since the piles penetrate 5 ft of fill and 35 ft of soft bay mud into silty sand and blue-gray silty clay, they develop their strength by friction in the firmer strata. To insure that the test pile would reach this strata it was driven with a 32,500 lb single acting steam hammer.

The test method was planned to check the bearing capacity of the deeper soils.

To eliminate the frictional support of the upper soils six rotary drill holes each 70 ft deep were placed around the periphery of the pile and left filled with drillers mud. Thus the test was actually made on the lower 18 ft of the pile.

The test load was applied in increments of 20 tons with a waiting period between increments to allow the pile to settle. Full settlement at maximum load was just under ½ in. After the load was removed, the net settlement was less than 0.1 in. And it is believed that the settlement is due to deformation of the pile, with no additional penetration of the pile tip and no effect from the earthquake.

The test was conducted by the Raymond Concrete Pile Co., which holds a contract for the hangar piles. Boyd Begg is superintendent.

The hangar was designed by Skidmore, Owings & Merrill, architects, and H. J. Brunnier, consulting structural engineer. Charles H. Lee was the foundation engineer.

The general contract for the project has not yet been let.

Corps Researchers to Test Road Construction on Ice

Selected personnel of the Army Engineers Waterways Experiment Station, Vicksburg, Miss., are enroute to Greenland for the study of road construction on ice.

The Vicksburg expedition, known as the Army Mobility Research Center and staffed by civilian personnel, will begin operations about May 1 and continue them until about Sept. 1.

The research is directly concerned with two projects. One is to develop and design construction techniques for earthfilled roads on glacial ice surfaces. The other is to provide data for determining the "traffic-ability" of Greenland icecap snows for existing vehicles.

The earthfilled roads are needed for easy access from the toe or an ice ramp to an area on the icecap where erosion and differential melting of the ice ramp decreases to the point at which vehicles can move with greater ease. This project has been under way for the past three summers and the construction phase is substantially complete (ENR Feb. 7, 1957, p. 28). Now major effort will be devoted to observing performance. Data collected will be used to further strengthen the correlation established to date, and to locate an access road from a point in southern Greenland to a point on the edge of the icecap.

The second project calls for testing a large variety of vehicles on the icecap to determine the operating capabilities of various snow types.

On-Job Training Started For State Road Engineers

In an effort to attract and hold engineering graduates, the North Carolina State Highway Commission will put young engineers through a 27 month on-the-job training course. Each trainee will spend several months in nine key highway sections, learning the various phases of work.

Chairman A. H. Graham stresses that the training program is a pilot operation and that it is his hope that in-service training will be a continuing operation and can be expanded into other phases of highway work.

The training program being developed for graduate engineers is in addition to a 24 week in-service program announced recently for construction and location employees in the Engineering Aid I and II classification, many of whom are not college trained. The men will be selected by division engineers on the basis of ability and potential for development, and must have had a minimum of six months' highway service.

CONSTRUCTION COST CUTTERS

In Home, Church, School, Institutional, Industrial and Commercial Buildings

SHEFFIELD

STEEL JOISTS

Standard and Longspan

Sheffield Open Web Steel Joists serve three ways in this 1¼-million-dollar structure. Roof purlins and ceiling joists are Sheffield standard (shortspan) joists. The pitched-roof beams are Sheffield longspan joists which have extended ends for eave support.

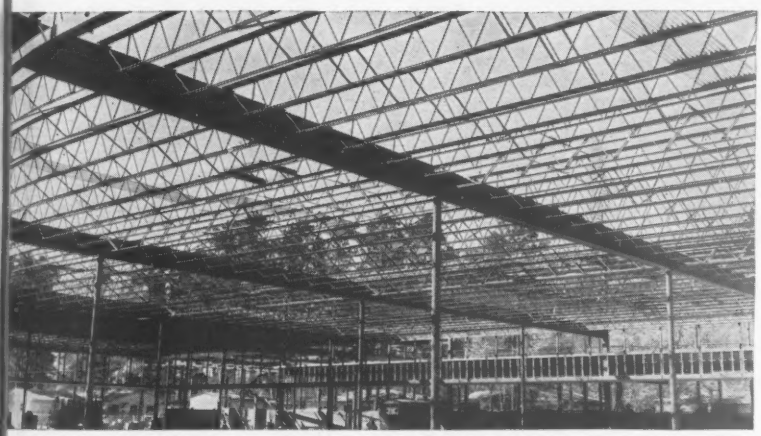

Sheffield Standard Steel Joists are adaptable to the application of any type floor, roof or ceiling. Sheffield makes a complete line of anchoring accessories, including extended ends for cantilever eave support. Standard joists provide clear spans up to 40 feet wide.

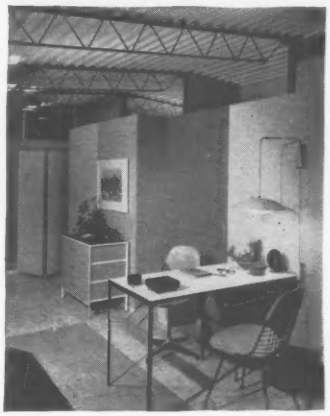

Imaginative design: Allowing steel roof framing to project down into room space (in both residential and commercial building) permits economy of lower walls without reduction of floor-to-ceiling height, since exposed inside roof provides ceiling above instead of at the bottom of joists.

Sheffield Longspan Steel Joists make possible larger areas of wide open floor space, uninterrupted by interior columns. They allow unobstructed spans up to 96 feet wide, with minimum dead-load and maximum non-concentrated liveload capacity.

Better, stronger roofs and floors go up faster when you build with Sheffield Open Web Steel Joists. They're quickly set . . . and immediately provide a working platform. Electrical, plumbing, steamfitting and air-conditioning crews swing into action sooner to string their lines and ducts through the open webs of the joists.

Right on their heels start the roofing, floor-laying and plastering crews. No need for slow, expensive falsework. You have everything in your favor for on-schedule work progress and on-time completion.

So much for on-the-job savings. There's more: The combination of lightweight and high strength of Sheffield joists makes possible important design economies . . . beginning with the foundation and going right up to the roof. Lighter columns and walls. Less dead weight.

SHEFFIELD DIVISION ARMCO STEEL CORPORATION SHEFFIELD PLANTS: HOUSTON • KANSAS CITY • TULSA

NOBLE TRIPLE BATCHER produce
one operator in 1 stop

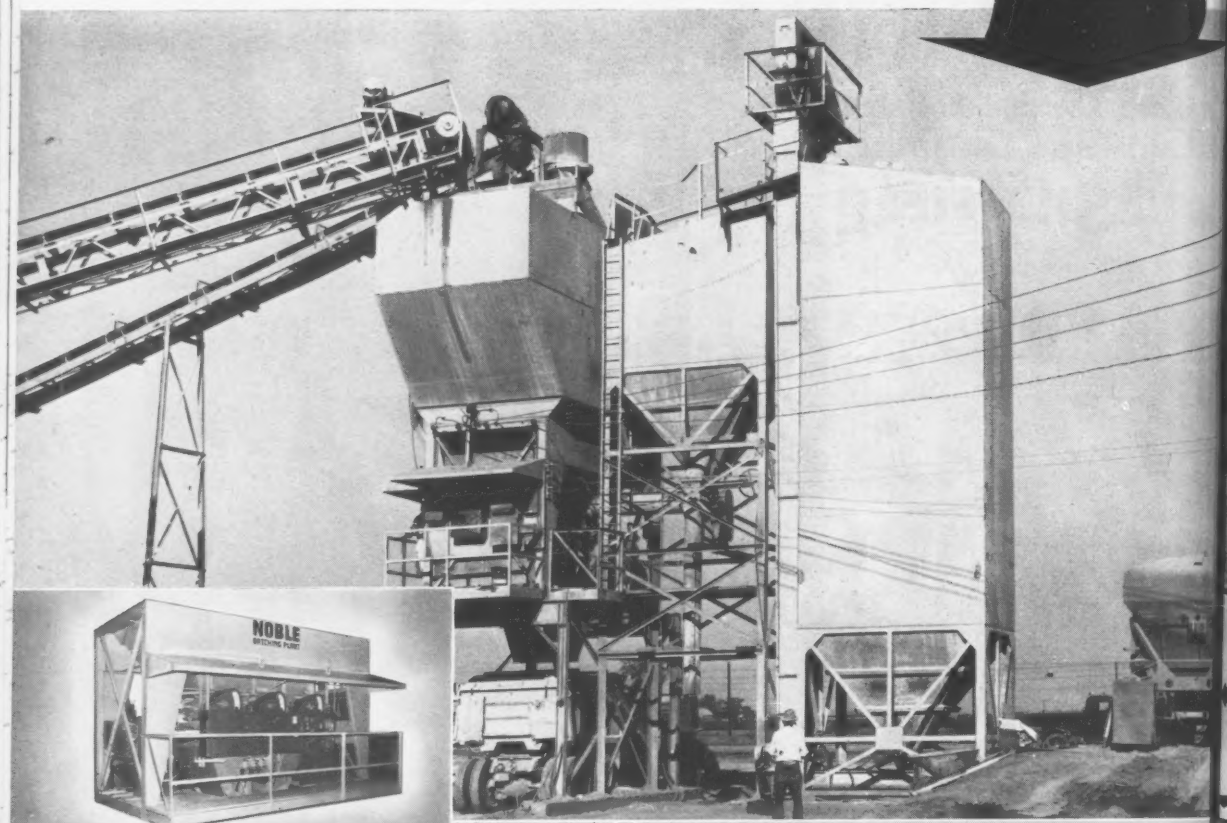

Bin center section can be truck-hauled without removing weigh hoppers, operator controls or any other components. All electrical switches are mounted in this unit and connections are made by simple twist-lock couplings.



3 pen recorder, optional equipment, produces record of each material as required by Corps of Engineers specifications. Adaptable to 1 or 2 stop set-up.

✓ **Weighs 3 materials for a single batch one time!** *(sand, coarse aggregates, cement)*

✓ **Batches accurately to rigid specification**

✓ **Supplies 2 or 3 dual drum pavers!**

Lowest erection costs. Noble comes completely equipped ready batching. Factory assembled sections, all within legal width highway transport, are quickly erected on timbers or conc

NOBLE CONCRETE BATCHING PLANTS

WRITE FOR CIRCULAR

THE NOBLE COMPANY • 1860-7TH ST., OAKLAND 20, CALIF. • TEMPLEBAR 2-
Branches: 20950 Center Ridge Road, Cleveland 16, Ohio. EDison 1-3426
518 First Ave. North, Seattle, Wash. MUtual 4878
218 Richmond St., El Segundo (Los Angeles), Calif. EAstgate 2-4518
International Sales Agent: Frazar International Corp., San Francisco

over 300 yards per hour with 2 stop set-up

FROM COAST TO COAST

Left—Supplying 3 pavers on California air base construction. Produced 3500 cubic yards in 10 hour period. 36" coarse aggregate conveyor, 24" sand conveyor. Cement silo has facilities for direct loading of cement spreader trucks.

Below—On New England paving job.

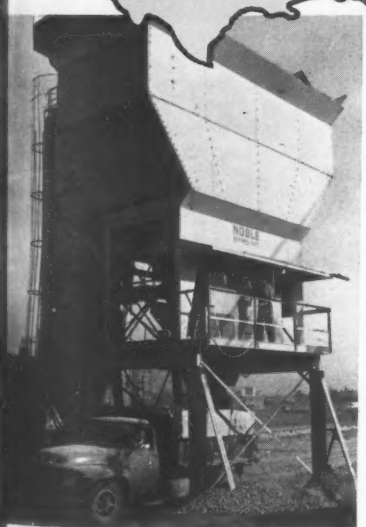

For short stretch paving, come back work, tunnels, bridges, use...

NOBLE-MOBILE Batching Plant on Wheels

Convair Aircraft taxiways

Bureau of Reclamation siphon, Othello, Wash.



Ohio highway paving

Batches at the job site where hauls are shorter and profits longer. 100% complete plant. 65 to 125 yards per hour. Scoploader, crane or conveyor loaded. Supplies transit mix, dry batch or premix.

DISTRIBUTORS: BIRMINGHAM, ALA., Equipment Service Co., Inc. • DENVER, COLO., Western Machinery Co. • INDIANAPOLIS, IND., Manwaring Machinery Inc. • CEDAR RAPIDS, IOWA, James W. Bell Co., Inc. • LOUISVILLE, KY., Emmett C. Watson Co. • LOS ANGELES, CALIF., Smith-Booth-Usher Co. • MIAMI, Neff Machinery, Inc. • BOSTON, MASS., Hedge & Matthais Co. • BALTIMORE, MD., General Supply & Equipment Co. • DETROIT, MICH., R. G. Moeller Co. LOUIS, MO., George F. Smith Co. • ST. PAUL, MINN., Borchert-Ingersoll, Inc. • DUNELLEN, N. J., Miller Equipment Co. • CHARLOTTE, N. C., Spartan Equipment Co. VELAND, OHIO, Wepco Equipment Co. • OKLAHOMA CITY, OKLA., Herd Equipment Co. • PORTLAND, ORE., Clyde Equipment Co. • PHILADELPHIA, PA., Furnival Ma- ery Co. • PITTSBURGH, PA., Equipment & Supplies, Inc. • NASHVILLE, TENN., Peterson Machinery Co. • AMARILLO, TEX., Plains Machinery Co. • DALLAS, TEX., North as Equipment & Supply Co. • EL PASO, TEX., Border Machinery Co. • HOUSTON, TEX., Boshck Engineering Co., Inc. • SAN ANTONIO, TEX., Contractors Machinery Co. CO, TEX., Richards Equipment Co. • SALT LAKE CITY, UTAH, Arnold Machinery Co., Inc. • SEATTLE, WASH., Star Machinery Co. • SPOKANE, WASH., Intermountain ipment Co. • CASPER, WYO., Studer Tractor & Equipment Co., Inc. • VANCOUVER, B. C., Westcoast Equipment Co., Ltd. • MONTREAL, QUE., Laurentide Equipment Ltd. • WINNIPEG, MAN., Huggard Equipment Co., Ltd. • CALGARY, ALB., Precision Machinery & Foundry Co., Ltd. • KANSAS CITY, MO., Funkhouser Machinery Co. CAGO, ILL., Arrow Contractors Equipment Co.

Designed for unusually heavy loads . . .

. . . the frame of the new structural test building at the Martin aircraft plant in Baltimore will anchor the numerous load lines that simulate flight loads on a plane.

DENSE FRAMEWORK contains about 130 lb of steel per sq ft of floor area, 8 to 10 times as much as most one-story frames.

Building Frame Is Also Test Rac

Erik W. Wolf
Vice President
Green Associates, Inc.
Baltimore, Md.

An unusual dual role is assigned to a building now under construction in Baltimore for the Glenn L. Martin Co. The steel-framed structure will serve not only as a shelter, exposed to the usual weather loads, but also an as aircraft-test frame, subject to several times the loads ordinarily imposed on one-story buildings.

Every aircraft manufacturer has structural-test facilities, of course; he uses them to simulate stress conditions prevailing in flight by statically loading various points on an anchored-down plane.

The forces are applied by means of jacks in wire-rope load lines, which run from load-application points on the plane to some kind of test structure that supplies the necessary reactions. Usually, though, the structure is a steel frame erected inside a building—not the building frame itself.

• **Four schemes studied** — Spacewise, Martin's needs were for a building some 200 ft square, post-free inside and clear overhead to a height of 65 ft. After studying four framing schemes meeting these requirements, Green Associates, Inc., Baltimore engineers-architects, adopted a system based on two-hinged trussed arches as the main supporting bents.

Approximately rectangular in elevation, the arches consist of Warren-type leg trusses and parallel-chord Pratt trusses overhead (slightly pitched on top for drainage). The arches span 205 ft c-c of base hinge pins and rise 66 ft from the pins to the lower-chord level of the Pratts. Overall width and height of the building are greater, however, because of the depth of the trusswork (8 to 10 ft in the legs, 18 to 20 ft overhead). The length of the building is 210 ft. And it incorporates eight arches 30 ft c-c.

• **Heavy design loads**—Although the dimensions of the building are not especially remarkable, its load-resisting capabilities are unusual, including th following:

The slab can resist uplift of 2 millio lb (1,250 psf) on any 40x40 ft interio area or 3 million lb (1,000 psf) on an 30x100 ft interior area; anchor plate set into the slab every 10 ft in both directions can each resist 100,000 lb uplift and 40,000 lb horizontal shear anchor rails that traverse the slab ever 10 ft in one direction are good fo 10,000 lb per lin ft uplift; the roo trusses are designed to take a series o concentrated loads totaling 825,000 lb (per truss) on any five consecutive pane points (panels are 20 ft).

Besides the test loads, the structure is also designed for various combina-tions of the following: 20 psf snow load 20 psf wind load, two 5 ton cranes a top-chord level, two 20 ton crane at bottom-chord level, temperature stresses, bending moments due to frame distortion, and stresses due to differ-ential displacement of pins.

• **Dynamic unloading**—An additional as-pect of design was the dynamics of sud-

denly
was n
releasi
the tr
vibrati
unload
cause
stress

• **Slab**
lift on
seem a
thickn
a safet
howeve
of the
ate tes
and w
down t
The
tion of
plates.
exposed
the 2½
bird-cag
and sic
24 in.
2 in.

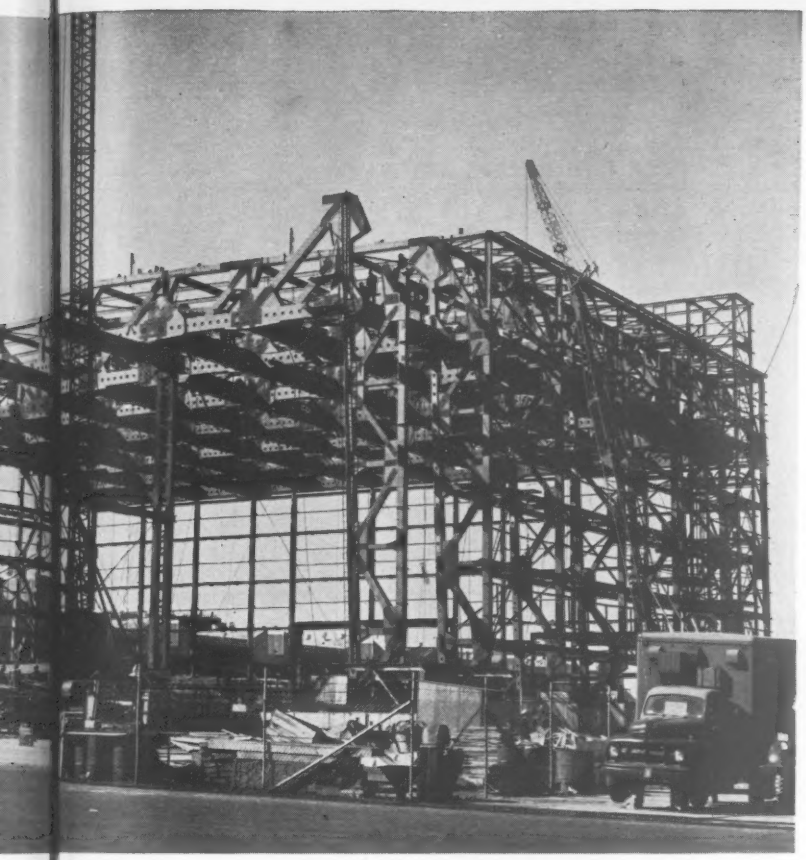

ac or Aircraft

denly unloading the test structure. It was necessary to analyze the effects of releasing the entire 825,000 lb from the trussed arches in 0.15 sec. The vibrations resulting from such rapid unloading were found great enough to cause stress reversals and significant stress increases.

• **Slab construction**—The 1,250 psf uplift on the slab would dictate, it would seem at first look, a minimum concrete thickness of 8 ft, with no allowance for a safety factor. In analyzing the slab, however, the designers took advantage of the restraint exercised on the immediate test area by surrounding slab areas and were able to keep the thickness down to 5 ft.

The most exacting task in construction of the slab was setting the anchor plates. Each of the 23 in. steel disks exposed at the finished slab surface is the 2½ in. thick top of a 6 ft high, bird-cage-like assembly. The bottom and sides of the cage—respectively, a 24 in. steel disk ½ in. thick and eight 2 in. round bars, 6 ft long—are embedded in the concrete. The specifications called for setting these assemblies—amounting to 420 in all, topheavy and weighing about 1,000 lb each—with no more than ⅜ in. deviation from line and grade.

• **How anchors were set**—The bottom disk, with three leveling bolts projecting below it, was actually a leveling plate for the assembly. Nevertheless, it was difficult to set the units without very rigid supports. The contractor, therefore, built deep timber trusses and suspended the anchors from them. At the bottom of each suspended assembly, in a 2x2x2 ft pit, he placed concrete to embed and support the leveling bolts after the line and grade of the anchor plates had been checked.

Similar accuracy of placement was required for the anchor rails, which traverse the slab on 10 ft centers, staggered between the rows of anchor plates. The latter, installed first, proved to be a convenience in placing the rails. A system of steel framing was tack-welded to the anchor-plate assemblies and served as temporary support for the rails.

After making a final check on the locations of the anchor plates and rails, the contractor placed the slab concrete, casting it in sections about 40 ft square. The 5 ft structural slab was brought up to a level 8 in. below the tops of the anchors, and a wearing surface was cast in the remaining depth.

• **Frames weigh 130 psf**—Although the 5 ft slab is an unusually thick one for the floor of a one-story building, the effects of designing for the heavy test loads are even more apparent in the amount of superstructure steel. Instead of the usual 12 to 15 lb of steel per sq ft of floor area, the building is framed with nearly 130 lb per sq ft. All told, it contains more than 3,000 tons of structural steel.

The large tonnage is not too surprising, though, considering the magnitude of the loads. To produce the same direct chord stresses at the trussed-arch midspan as those produced by the concentrated design loads applied symmetrically about the arch midpoint, it would take a uniform load of about 6,500 lb per lin ft on the entire span. This is roughly 10 times the lane load of a highway bridge. (The uniform-load equivalent of H20-S16 loading is 640 lb per lin ft of 10 ft lane.)

• **3-D loading**—Furthermore, the system of test loads applied to the building

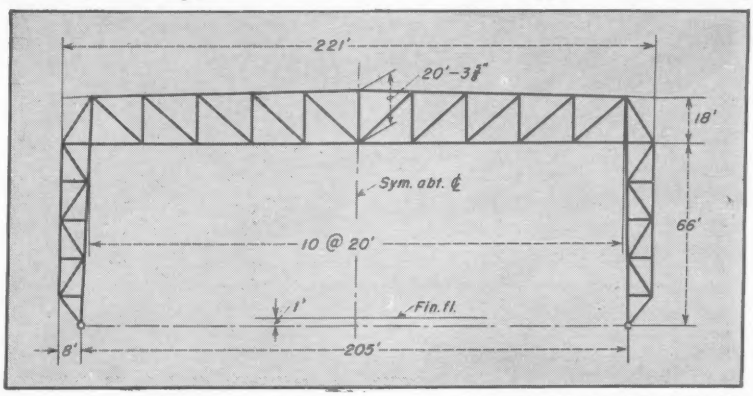

TWO-HINGED TRUSSED ARCHES, 30 ft c-c, are the main structural bents of the building. Three other schemes were considered during the preliminary planning.

. . . Aircraft tests involve loads in all directions

ANCHOR PLATES, aligned and leveled to 1/32 in. accuracy, were embedded in a . . .

5 FT FLOOR SLAB—it contains 420 anchor plates and 4,000 ft of anchor rail. Plates a designed for 100 k uplift, 40 k shear; rails for 10 k uplift per lin ft.

frame will be three-dimensional. The wire-rope load lines will be so positioned at various times on the aircraft under test that they will impose load components similar to those experienced in takeoff, flight and landing. Attached directly to points anywhere along the length of the bottom chords of the overhead trusses, or the inside chords of the leg trusses, or the combination beam-struts between adjacent bottom chords, the load lines will impose on these members not only axial loads but also torsional loads and bending about both axes. This led to the design of welded box sections for these members.

• **Member sizes** – Bottom chords are generally 16x20 in., built up from plates. The inside chord of the leg truss is a 14 in. wide-flange section with 1x15 in. plates welded across the flanges. The box girders that serve also as struts are built up from plates to a width of 21 in. or 27 in. and a dep of 42 in.

Splices in these members are h to a minimum because of the requi ment that almost 100% of the a of the members be reserved for the tachment of test-load lines. There no splices at all in either the b girders or the inside chord of the truss, and the lower chord of the r truss is spliced only twice in the 2 ft distance between its intersectio with the legs.

FRAMING at bottom-chord level of trussed arches is drilled with thousands of 1⅛ in. holes for the bolt-attachment of test-load lines. Larger openings are hand holes.

• **Bracing**—Except in the bottom-cho plane, the trussed arches are brac conventionally. Both outside and insi chords of the leg trusses are vertica K-braced, and horizontal X-bracing used in the top-chord plane of the ov head framing. Special consideratio however, ruled out the installation diagonals in the bottom-chord plane cept in the end bays and in panels a jacent to the leg trusses along the sid of the building. Accordingly, the end bays and outer panels were brac with a horizontal single-Warren ty of framing, and the remainder of t lower-chord-bracing function was signed to the box girders.

• **Erection**—The steel erectors built the trussed arches on steel falsewo frames. Using three of the frames support an adjacent pair of arches, th erected first the inside chords of t leg trusses, next the bottom-chord me bers of the overhead trusses, and th the webs and remaining chord me bers. They made all field connectio with high-strength bolts.

"Use wire rope? Get this helpful recommendations book!"

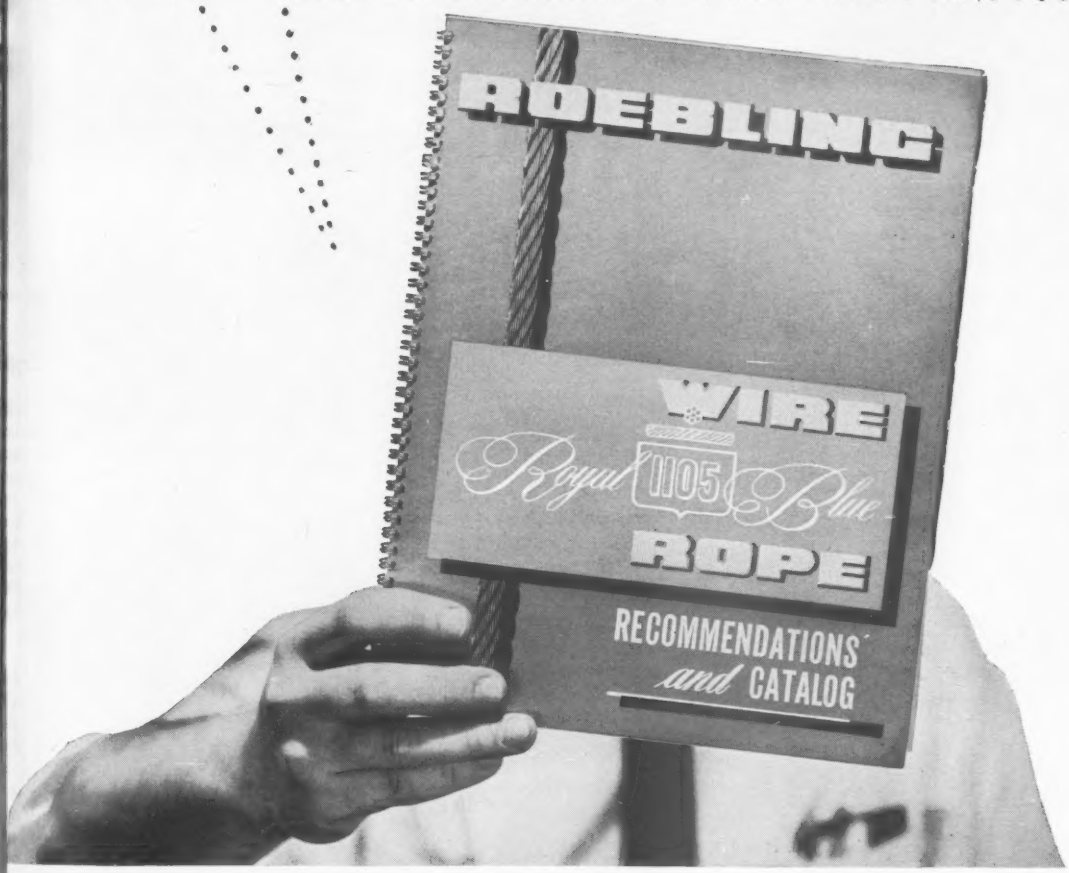

"Roebling Wire Rope Recommendations and Catalog" is designed to simplify the selection and ordering of the right wire rope for specific applications—whatever they may be.

The best wire rope for top performance on any job shows up at a moment's notice . . . making the right choice is easy as flipping the tabbed pages of this easy-to-follow, 56-page book. Besides, there's a simple, foolproof, coded ordering system, which identifies the desired size, grade and construction.

May we send you your copy? Mailing the coupon will bring it to you at once. And should the catalog prompt any question on which you'd like further information, field men from your nearest Roebling office or distributor will, of course, assist you . . . or write Wire Rope Division, John A. Roebling's Sons Corporation, Trenton 2, New Jersey.

ROEBLING

Branch Offices in Principal Cities · Subsidiary of The Colorado Fuel and Iron Corporation

ENR

Wire Rope Division
John A. Roebling's Sons Corporation
Trenton 2, New Jersey

Please send me my copy of "Roebling Wire Rope Recommendations and Catalog."

Name_____

Company_____

Address_____

City_____

Zone_____ State_____

One of the many drill rigs now in operation throughout the United States and overseas.

The most important primary phase of construction, roadbuilding or mining begins with foundation investigation or exploratory work from which it is desired to get complete information and best possible cores. In many instances, contractors make the mistake of bidding on work or taking a contract without complete knowledge of sub-surface conditions, or miners will start mining operations without first conducting a thorough exploration program, but successful contractors and mining men always investigate first to know how to quote in order to get the contract and still make a profit, and how to plan to have a successful operation. One of the most reliable organizations in America for furnishing this information and satisfactory cores is Sprague & Henwood, Inc. For more than seventy years it has been rendering satisfactory core drilling service throughout the United States and the world. Many of its customers have continuing contracts with Sprague & Henwood, Inc., because they know that they can be assured of the best in foundation investigation and core drilling service that can be found anywhere.

Sprague & Henwood, Inc., with its own manufactured field tested drilling equipment; its own manufactured "Oriented" diamond bits; its highly trained personnel; and its well trained and highly qualified supervision assure you of the best possible results obtainable.

Write to Sprague & Henwood, Inc., today for any information relative to test borings or core borings you desire, or for an estimate, giving complete information, and it will be on its way to you just as quickly as possible, without obligation to you.

SPRAGUE & HENWOOD, Inc.
SCRANTON 2, PA.

BRANCH OFFICES: NEW YORK • PHILADELPHIA • PITTSBURGH • ATLANTA
BUCHANS, NEWFOUNDLAND • GRAND JUNCTION, COLORADO

. . . Martin test building

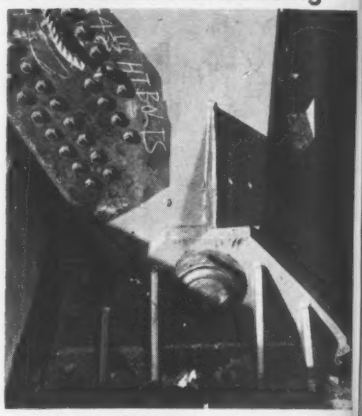

HINGE CONNECTION at base of trussed arch is a steel pin 8 in. in diameter.

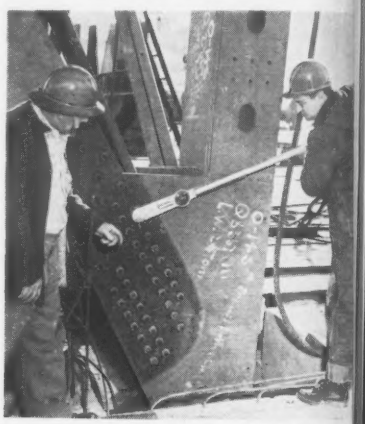

HIGH-STRENGTH BOLTS, 90,000 in all, were used to make all field connections.

As a hedge against erection difficulties due to possible errors in locating anchor bolts, the base-hinge assemblies of the arches were designed to be field-welded to bed plates, the latter to be installed before the erection of the arches, and the hinge assemblies to be installed at the same time as the arches. This method demanded less precision than would have been required if the hinge assembly had been fabricated with holes that had to match the locations of previously placed anchor bolts. The bed plates, about 4 ft square and 1 in. thick, were anchored to the top of the foundations by means of sixteen 1 in. hooked bars each, welded to the bottom of the plate and embedded in the concrete.

William T. Lyons Co., Baltimore contractor, is constructing the building at a cost of about $3.1-million. American Bridge Division of U. S. Steel Corp., of New York, fabricated and erected the structural steel. C. T. Blake is the engineer in charge for Green Associates, Inc.

THE *NEW* POWER-PACKED HEAVY-DUTY *Cardinal* 1957 MASONRY SAW

with new improved Micrometric Head Height and Head Angle Adjustments

2 HP Continuous Duty Motor as Standard Equipment

NEW MICROMETRIC HEAD HEIGHT ADJUSTMENT

NEW MICROMETRIC HEAD ANGLE ADJUSTMENT

100% MORE CONTINUOUS POWER

QUICK, SIMPLIFIED VOLTAGE CHANGE

AMAZING "BLADE SAVER" PRESSURE REGULATOR

SENSIBLY PRICED!

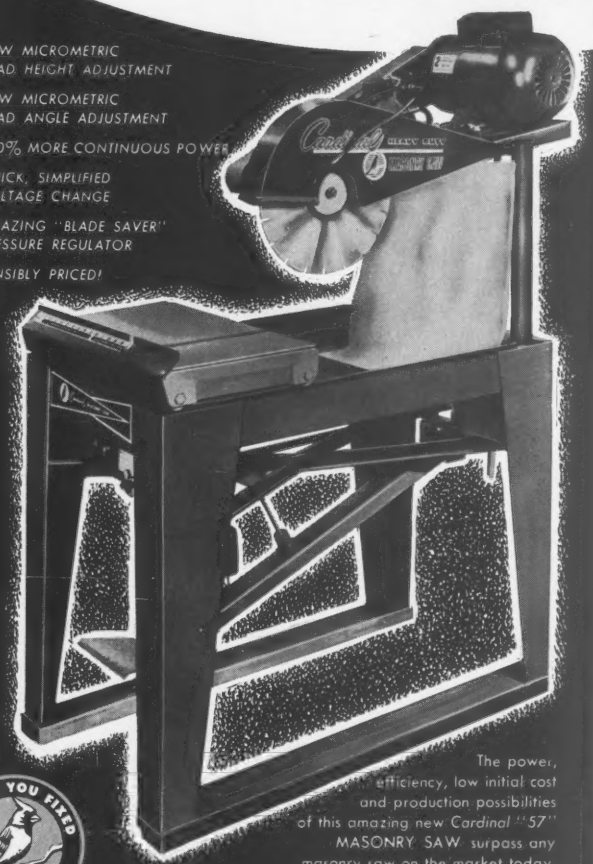

HOW ARE YOU FIXED FOR BLADES

The power, efficiency, low initial cost and production possibilities of this amazing new *Cardinal* "57" MASONRY SAW surpass any masonry saw on the market today. On your next tough job . . . on hard, medium or soft materials . . . try the Cardinal "57" Saw . . . you'll get effortless performance, hour after hour—wet or dry, for top performance and maximum life from ANY make of masonry blade. Send for Bulletin MS-57 and latest price list.

Cardinal ENGINEERING CORPORATION

144 BURNSIDE ST., PHILADELPHIA 27, PA. U. S. A.

World's Largest Manufacturer of Abrasive and Diamond Masonry Blades and Saws

. . . and BLADES

Cardinal
ABRASIVE BLADES

Rugged, wear resistant, factory tested, balanced and dressed for superior wet or dry cutting of ANY masonry material.

Cardinal
NEW MULTI-PURPOSE TUNGSTEN CARBIDE DIAMOND BLADES

For all types of materials—brick, tile, refractory, block, concrete. Maximum diamond concentration along edge (by our hi-retention process) assures longer cutting life.

Cardinal
NON-BRAK MASONRY BLADES

Break resistant. Maximum safety on fussy wet or dry cutting jobs. Cut faster and better, last longer, cost less.

Every Cardinal Blade, Abrasive, Non-Brak, Diamond —has had the wear test for ruggedness and dependability. Send for catalog and price list.

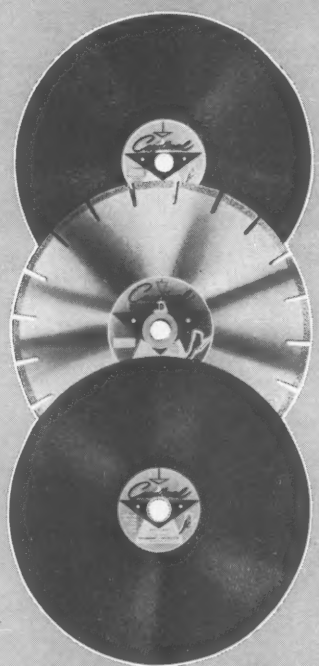

WORKING SIDE BY SIDE, the two Worthington Dual Drum Pavemasters divide the job—the outside unit handling the paving from the center of the strip back and the inside unit paving from the edge to center.

"FASTEST PAVERS I'VE

Lightning fast charging. Skip travels from ground (right) to charging position of 56 degrees slope (left) in just 6½ seconds.

High daily pour. With 25 ft. strips and 15 to 21 in. concrete, it averaged 1800 lineal feet (equivalent to 3600 ft. of highway paving).



Hydraulically controlled boom on the new Pavemaster with its fast, smooth swing assists operator in spreading concrete.



Hydraulically controlled dischar bucket saves time by eliminati split batches in the drum. Full part batches are easily discharg

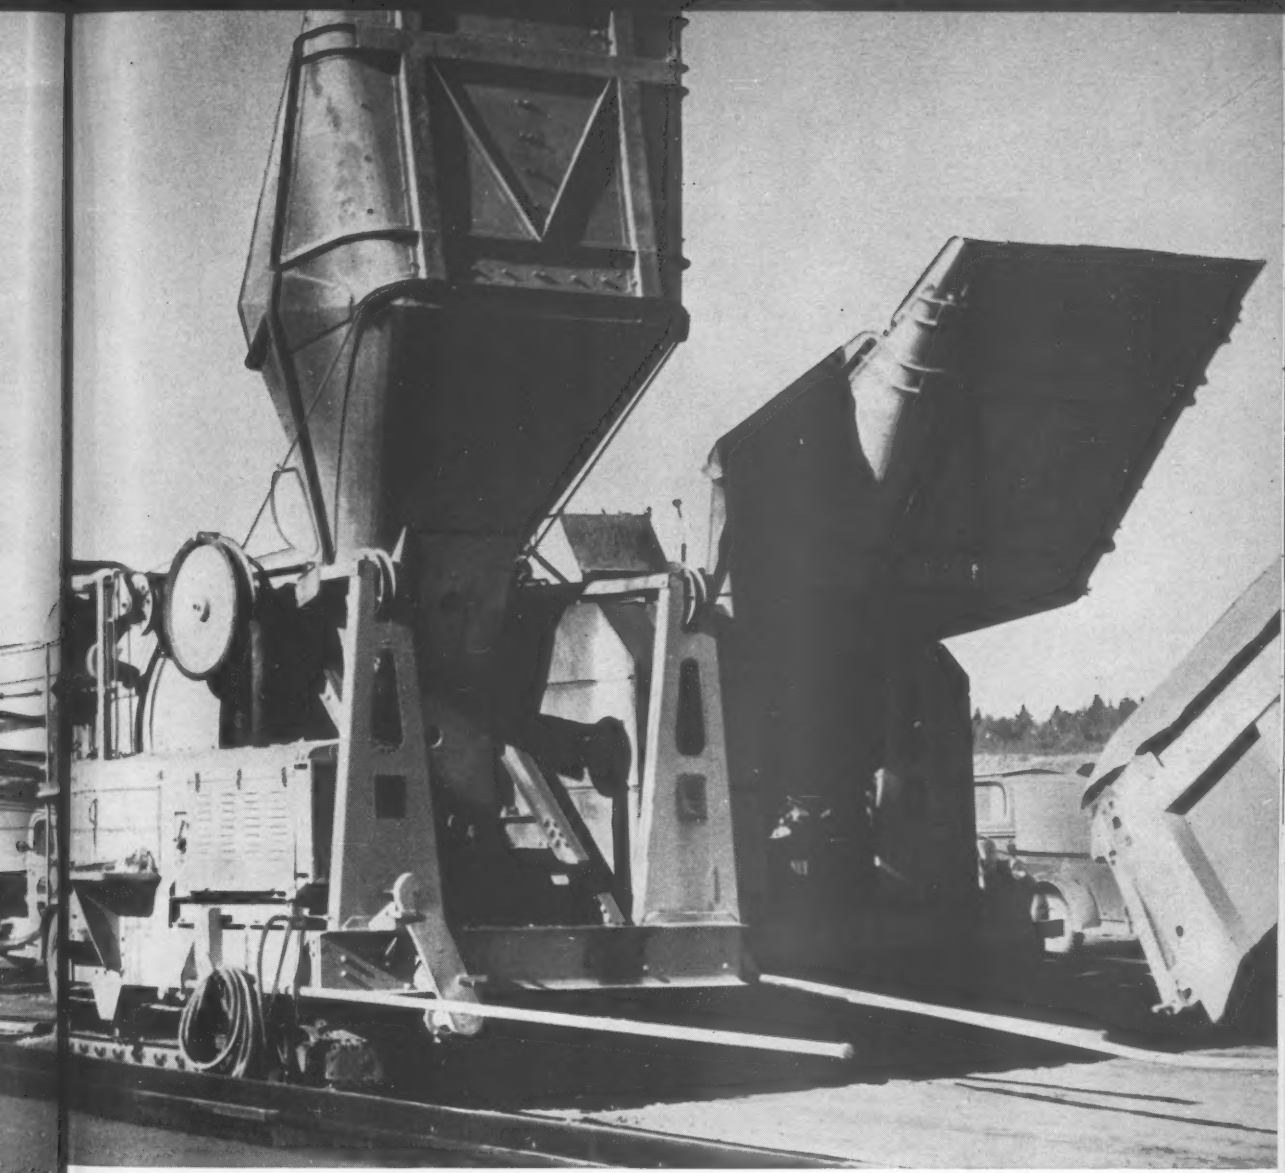

EVER SEEN" Reports leading New England contractor about 2 new Worthington 34-E Dual Drum Pavemasters



High bucket speed—256 feet per minute both forward and reverse —speeds operation, increases output on the new Pavemaster.

Two new Worthington Dual Drum Pavemasters are setting the pace for a ten-and-one-half million dollar, 13,500 ft. runway at Dow Air Force Base, Bangor, Maine.

Working side by side, the Pavemasters are "the fastest operating pavers I've ever seen," according to general contractor J. R. Cianchette. He explains that due to the pace set by the pavers, with a 6 to 7 second skip operation, a 6 to 8 second hydraulically-controlled transfer operation and a 6 to 8 second hydraulically-controlled discharge chute operation, it was necessary to keep his batch trucks rolling on an accurately-timed schedule.

The tremendous scope of the job emphasizes the necessity for paver speed. Between now and the 1958 completion date of the project the pavers and crew of 150 will place an estimated 255,000 cubic yards of concrete!

In addition to speed, the new Worthington 34-E Dual Drum Pavemaster has many new money-saving features. No less than 17 major improvements have been incorporated into its design and manufacture. For the full story, write for your copy of descriptive bulletin 1270-B1. Address Section R-73, Worthington Corporation, Harrison, N. J.

WORTHINGTON

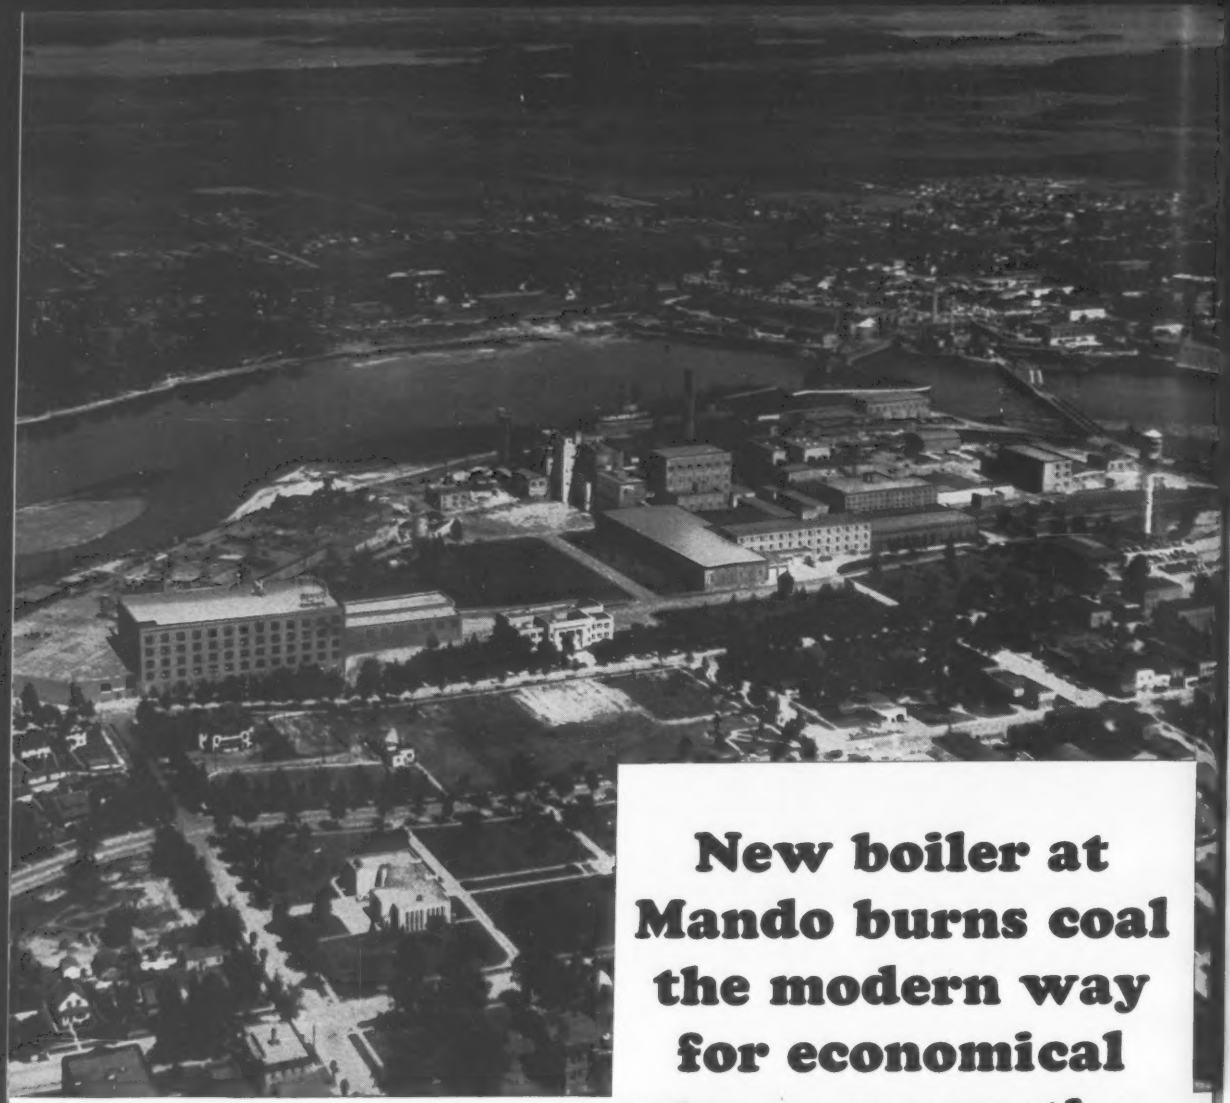

New boiler at Mando burns coal the modern way for economical steam generation

Consult an engineering firm

Designing and building hundreds of heating and power installations a year, qualified engineering firms can bring you the latest knowledge of fuel costs and equipment. If you are planning the construction of new heating or power facilities—or the remodeling of an existing installation—one of these concerns will work closely with your own engineering department to effect substantial savings not only in efficiency but in fuel economy over the years.

facts you should know about coal

In most industrial areas, bituminous coal is the lowest-cost fuel available • Up-to-date coal burning equipment can give you 10% to 40% more steam per dollar • Automatic coal and ash handling systems can cut your labor cost to a minimum. Coal is the safest fuel to store and use • No smoke or dust problems when coal is burned with modern equipment • Between America's vast coal reserves and mechanized coal production methods, you can count on coal being plentiful and its price remaining stable.

Mando—the Minnesota and Ontario Paper Co.—is keeping pace with continuing production expansion. The firm recently installed in its plant at International Falls, Minn., one of the largest modern single-pass boilers in the pulp and paper industry. It is designed to produce 240,000 lbs. of steam an hour, bringing the mill's steam generating capacity to 960,000 lbs./hr. The new boiler has 22,500 sq. ft. of heating surface and required 300,000 lbs. of steel in its construction. It will use 775,000 gallons of water a day and, for economy, will burn pulverized coal as a primary fuel—300 tons daily!

For further information or additional case histories showing how other plants have saved money burning coal, write to the address below.

BITUMINOUS COAL INSTITUTE
Southern Building • Washington 5, D. C.

FOR CHICAGO:

Voters to Weigh $113 Million Bond Issue

Chicago voters will be asked to approve $113 million worth of new bond issues at the June 3 judicial election this year to cover a variety of public works improvements. A 13 point, three-year program covers sewerage, street lighting, fire protection, recreation, community conservation, slum clearance, mass transportation, garbage disposal, health and safety.

The three largest items, each calling for an expenditure of $15 million, are bridges and viaducts, airports, and street lighting. Next in size, with a price tag of $10 million each, are improvement to transit facilities, land clearance, and community conservation. Garbage disposal improvements will cost $9 million, and an equal amount has been earmarked for municipal buildings such as police and fire stations. A total of $8 million is recommended for construction of additional sewers, and $6 million for playgrounds and recreation. The two smallest items in the program are $1 million each for fire department equipment and the houses of correction.

• **Bridges and viaducts**—The $15 million earmarked for bridge and viaduct construction is urgently needed for major repairs, rehabilitation and construction of new bridges and viaducts to ease congestion and facilitate traffic movement.

It will permit the replacement of such old landmarks as the Dearborn St. bridge built in 1907, the Fullerton Ave. bridge, constructed in 1895, and the Halsted-Chicago viaduct over railroad yards, which was built in 1884.

• **Airports**—The proposed $15 million bond issue for this item will provide funds for completing the acquisition of land for O'Hare International Airport on Chicago's northwest side, and to lengthen runways and extend the terminal building to reduce congestion at Midway Airport on the city's south side.

(At O'Hare, the remainder of the total $100 million airport program will be financed by the airlines through revenue bonds. These bonds will be paid from revenues only and will not be general obligation bonds.)

• **Street lighting**—Chicago's city-side program of relighting 2,300 mi of residential streets and 930 mi of arterial streets has passed the half way mark, and an additional $15 million worth of lighting is needed to complete the job.

To date, 65% of the city's 155 sq mi of residential area has been relighted and 450 mi of arterial streets have been equipped with new mercury-vapor, high-intensity safety lighting. Most of this work has been done through the use of motor fuel tax funds. However, many of the arterial streets are not eligible for motor tax funds, and the proposed bond issue will provide money for this purpose.

Most of the $10 million in the item for mass transportation improvement will be used to expedite installation of transit facilities in the center strips of the Northwest, South and Southwest Expressways. This construction includes tunnels and other items which, if not built at the time the expressways are constructed, would increase the cost and difficulties of furnishing them at a later date.

• **Slum clearance**—The proposed bond issue of $10 million for land clearance will provide funds needed by the Chicago Land Clearance Commission to extend the federally aided program of slum clearance and check the spread of blight in the Windy City. It will enable the commission to expand its present program by about 40 percent.

The commission has 18 projects now under way, of which seven are nearly completed. Of the other 11 projects in various stages of planning, 6 will become active within the next four months and 5 are expected to reach the stage of property purchase and relocation by the end of this year.

This program is predicated on the expectation that the federal government will continue to support re-development work by furnishing $2 for every $1 of local funds authorized for local renewal projects.

The $10 million in the program earmarked for community conservation, is for revitalizing and rebuilding rundown

for pumping domestic and industrial wastes...

This Shone ejector has been in operation for 68 trouble-free years—in the Auditorium Hotel (Roosevelt College), Chicago, Illinois.

YEOMANS pneumatic ejectors cut service costs because

THERE'S NOTHING TO WEAR OUT

- NO ROTATING PUMP PARTS
- NO AIRTIGHT FLOATS
- NO HIGH-SPEED SHAFTS OR BEARINGS

With Yeomans pneumatic ejectors, maintenance costs are 50% to 75% lower than with the best centrifugal pumps. The secret? Simplicity of design. Yeomans pneumatic ejectors are built to give you decades of trouble-free service—in fact, they will outlast your system.

They're recommended for low gallonages. Even the smallest Yeomans ejector will pass solids up to the size of the inlet and discharge valves . . . minimum of four inches. No danger of clogging.

They're safer, and completely sanitary. Fully enclosed, hermetically sealed. Dangerous hydrogen sulphide gas is never released.

Yeomans manufactures both centrifugal pumps and pneumatic ejectors, but recommends the ejector where extreme dependability is required. Among the seven models and more than 100 sizes there is a pneumatic ejector that will exactly fill your needs.

Manufacturers of: pumps for drainage • sewage • condensation return • water supply and circulation • equipment for treatment of domestic and industrial wastes.

YEOMANS

YEOMANS, 1999-1 N. Ruby Street, Melrose Park, Illinois

Please send me literature on the pneumatic ejectors I have checked.

The Shone ☐



The Packex ☐

The Expelsor ☐

*name*_____

*company*_____

*street*_____

*city*_____ *zone*____ *state*_____

. . . Planned Works

TRANSIT FACILITIES from a $10 million part of proposed bond issue.

neighborhoods. Four major projects are currently under way, in the Hyde Park-Kenwood, near West Side, Lincoln Park and Englewood areas.

• **Garbage disposal**—Chicago needs the $9 million in the bond issue listed under garbage disposal chiefly for the construction of additional incinerators. With the city's only remaining disposal site, at 103 St. and Lake Calumet, approaching full capacity, it no longer is possible nor desirable to dispose of garbage in open land areas. The bond issue will provide funds for two additional incinerator plants which are urgently needed.

• **Sewers**—Chicago needs an additional $8 million for sewer improvements to supplement a $26 million fund previously authorized. It would permit extending the present 72 mi system of major trunk lines now serving 900,000 persons, to a total of 100 mi and serving 1,200,000 people.

Another urgently needed item in the $113 million, three-year public works improvement program, according to Chicago's Mayor Richard J. Daley, is the repair and improvement of Navy Pier. The 40-year old structure must be rehabilitated and its facilities expanded to serve the increasing number of ships using the pier each year.

• **Municipal buildings**—The $9 million for this item will be used for erecting and reconstructing buildings for ten district police stations, and for the erection and reconstruction of an equal number of fire stations. An additional $1 million is needed for new fire-fighting equipment, and $1 million for a new administration and medical building at the city's house of correction.

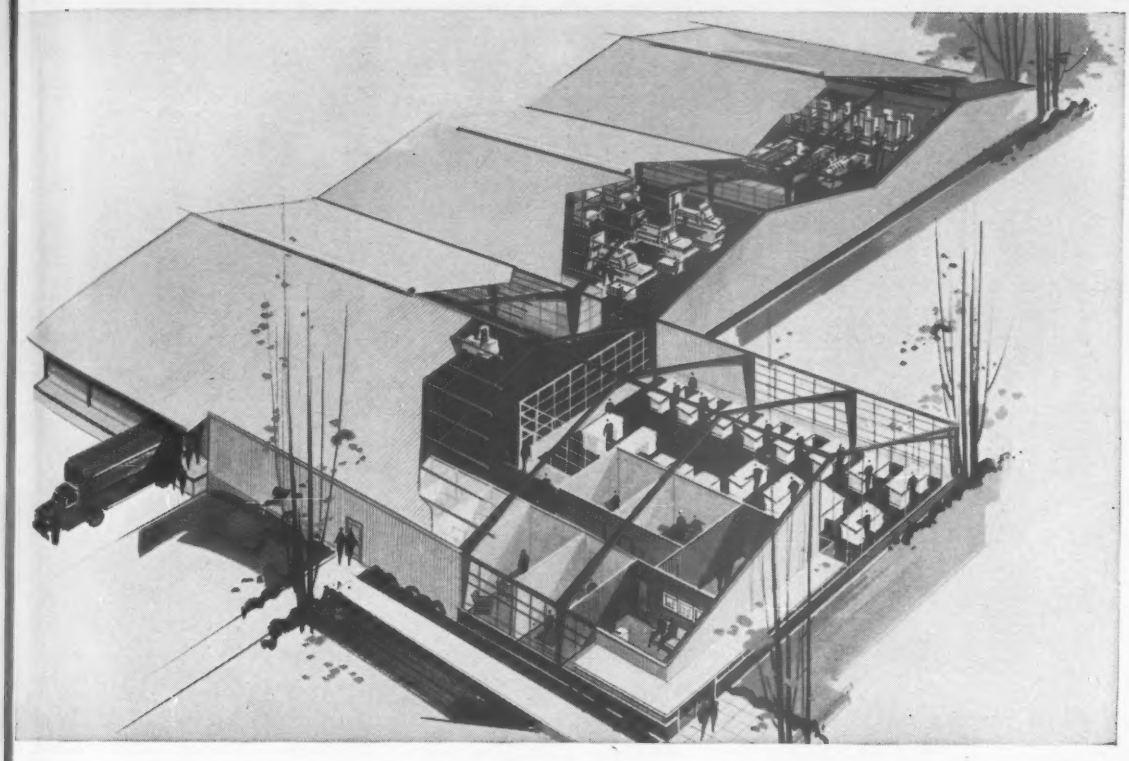

Manufacturers get rugged, clear-span design, attractive *Stran-Satin* walls

with NEW STRAN-STEEL BUILDINGS

Sturdy Tapered Frame Design Puts Strength Where Needed

The open, clear-span design of Stran-Steel buildings makes them ideal for the optimum use of machinery, manpower and materials in manufacturing operations. In addition, new Stran-Steel buildings have a look of quality never before achieved in an all-steel structure.

Start with the smart *Stran-Satin* finish. *Stran-Satin* metal wall, exclusive with Stran-Steel, provides a strong, durable exterior with the weather resistance of zinc-coated steel. Peaks, gables and eaves are completely enclosed with smart fascia flashing.

Under this attractive exterior is a rugged steel structure. At the peak and knee, the continuously welded rigid frame I-section steel plate beams are securely bolted together. Each frame is also permanently bolted to the foundation.

New Stran-Steel buildings are quickly erected at minimum cost, provide clear, unobstructed space for large equipment, and may be provided with such required accessories as overhead craneways or large access doors. With Stran-Steel buildings, you get the cost-saving features of a pre-engineered structure in a quality building that is fire-safe and easy to insulate. They are available in any length, with widths of 32, 40, 50, 60, 70, and 80 feet, and multiples thereof.

Up to $25,000 is available to finance these buildings through the Stran-Steel Purchase Plan. As little as 25% initial investment; up to 5 years to pay. Ask your Stran-Steel dealer for the complete story. He is listed in your classified telephone directory.

STRAN-STEEL CORPORATION
Detroit 29, Michigan • Division of
NATIONAL STEEL CORPORATION

Here is where to obtain more information:

Atlanta 3, Ga., 206 Volunteer Bldg.; **Chicago 6, Ill.,** 205 W. Wacker Dr.; **Cleveland 16, Ohio,** 20950 Center Ridge Rd.; **Detroit 29, Mich.,** Tecumseh Rd.; **Houston 5, Texas,** 2444 Times Blvd., **Kansas City, Mo.,** 6 East 11th St.; **Minneapolis 4, Minn.,** 708 S. 10th St.; **New York 17, N.Y.,** 405 Lexington Ave.; **San Francisco 3, Cal.,** 1707 Central Tower Bldg.; **Washington 6, D. C.,** 1025 Connecticut Ave., N.W.

Stran-Steel Corporation, Detroit 29, Michigan

☐ Please send me the Industrial Buildings Catalog.

☐ Please have your representative call.

Name_____

Title_____

Company_____

Address_____

City_____ Zone____ State_____

57-SS-30A 27

How to sign a "Hold Harmless" contract with confidence

You—or another representative of your company — may sometime be called upon to sign a contract carrying a "hold harmless" clause.

Take care! "Hold harmless" clauses can be far from harmless.

Among other points, three important considerations are involved in such contracts:

(1) They often create new and sizable liabilities. And (2) these liabilities may not be covered by your regular Liability Insurance.

So somebody should make certain that any liability your company assumes by contract is covered by contractual liability insurance. Or if it isn't, whether it *can* be.

(3) When your firm enters into contracts with companies or individuals who say they'll hold *your* company harmless, it's time to look at the other side of the coin: Just how good is *their* "hold harmless" agreement? Is it backed by specific contractual liability insurance?

As you can see, the subject isn't one that can be dismissed lightly. It's too complex for those without special knowledge to cope with successfully. And that's why so many companies prefer to have their entire liability hazard, including contractual liability, insured by the Hartford Accident and Indemnity Company.

The Hartford organization brings experience, competence and flexibility to the handling of your insurance problems. Gets under way quickly. Follows through in doing everything that can be done to meet your requirements.

When any "problem insurance matter" comes up — like contractual liability — call in an agent of the Hartford Group. Or ask your insurance broker about the benefits of *Hartford* Service. It's the simplest, surest way to avoid trouble!

Year in and year out
you'll do well with the
Hartford
Fire Insurance Company
Group

Hartford Fire Insurance Company
Hartford Accident and Indemnity Company
Hartford Live Stock Insurance Company
Citizens Insurance Company of New Jersey
Hartford 15, Connecticut
New York Underwriters Insurance Company
New York 38, New York
Northwestern Fire and Marine Insurance Company
Twin City Fire Insurance Company
Minneapolis 2, Minnesota

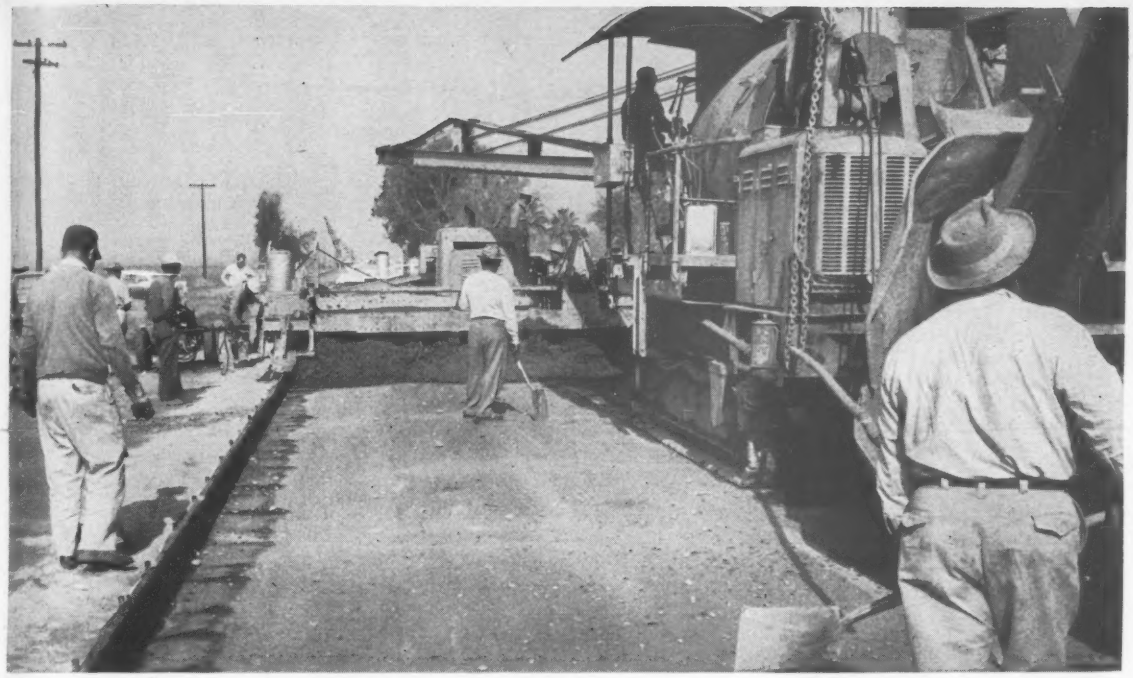

Paving Train lays two lanes of concrete on old road

Special Finisher Meets Tight Tolerances

Resurfacing of a stretch of the southbound lanes of the 4 lane divided highway (U. S. 99) joining Los Angeles with the Central Valley has been notable for the finishing procedure followed.

Instead of placing the 8 in. concrete slab in 12 ft single lane widths—the usual California highway practice in order to meet exacting smoothness specifications—the concrete was placed and finished to the full 24 ft, 2 lane width. And the specifications were met by a special contractor-developed, long-wheelbase finisher in which the float elements were arranged in a herringbone pattern.

The section of road resurfaced is south of Bakersfield on a gradual upgrade steep enough to force heavy truck traffic to travel in low gear at slow speeds. This produced a damaging effect to the existing 7 in. asphalt pavement built in 1938 with a mix of too low stability. Attempts at protection, first with an open-graded plant mix and then with a layer of asphaltic concrete, proved unsuccessful, causing the present resurfacing to be undertaken.

Under the resurfacing program, the existing pavement was used as subgrade without further preparation, wherever it appeared to be adequate. The new 8 in. concrete slab was added simply by pinning steel side forms to the edges of the old paving, and placing concrete directly on it. The finished work includes 10 ft wide asphaltic concrete shoulders.

• **Tolerances tight**—Griffith Co. of Los Angeles, the contractor, chose to lay the 24 ft wide concrete slab in one continuous operation. This is only the second time in recent California highway practice where full width (24 ft) paving has been used. Reasons are that a limited number of such paving spreads are available, and passing room is frequently needed during construction. But also important is the fact that specifications include special requirements to develop a smooth surface on the theory that smooth pavements are less susceptible to damage by impact from fast-moving, heavy vehicles. It usually has been considered that these specifications were more easily met on narrower widths.

California's tolerances of $\frac{1}{8}$ in. in 10 ft is not in itself unusual. But the specifications require a delayed finish and use of special floats until all concrete subsidence ceases. In addition, the contractor is required to grind off inequalities in excess of $\frac{1}{8}$ in. in 10 ft. in a longitudinal plane of considerable length.

These requirements virtually demand the use of a machine float that can level off inequalities.

Some engineers, however, have objected to the California finishing practice on the grounds that it builds up a layer of mortar on the pavement surface. This, they contend, leads to severe surface damage after one hard winter. California highway engineers, however, have cut numerous cores from their pavements to see if this is true and reportedly have found no inordinate segregation or surface mortar layer.

• **Equipment train**—The paving train included a spreader that tamped and kneaded the mix for initial finishing, and a 24 ft wide mechanical finisher that assured uniform distribution of the concrete through screed action.

This finisher, job-developed by the contractor, has a series of steel-clad timbers arranged in a herringbone pattern. It spans the 24 ft between steel side form and is 20 ft long. Self-propelled, the machine makes several passes after the concrete is nearly set to level off the inequalities with reference to the long wheel base, and to leave a smooth pavement.

A Report on How Engineered Timber Serves the Needs of Modern School Construction

The School District of Massapequa, Long Island, New York, found a solution to overburdening school building taxes by using engineered timber construction for four schools recently built in their community.

Clear span Teco roof trusses connected with Wedge-Fit split ring connectors and glued laminated beams and arches were used for a 35% reduction in initial construction costs.

THE MASSAPEQUA SCHOOLS

THE UNQUA SCHOOL

THE BIRCH LANE SCHOOL

THE CARMAN ROAD SCHOOL

THE HAWTHORN SCHOOL

SEND TODAY FOR FREE COPY of "THE MASSAPEQUA STORY"

TIMBER ENGINEERING CO. ENR-573
1319 18th Street, N. W.
Washington 6, D. C.

Please send me FREE Copy of "The Massapequa Story."

Name.....

Position.....

Street.....

City, Zone, State.....

. . . Special finisher permits two lane paving

FLOAT FINISHER, two lanes wide, puts final touches on surface. Tight evenness requirements have made multi-lane paving unusual in California.

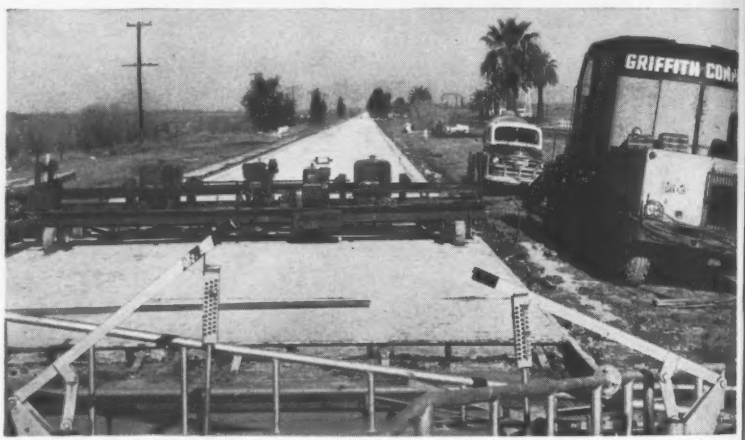

TRANSVERSE JOINTS are cut at 15 ft intervals by a two bladed, wheel mounted saw. Longitudinal joints in 24 ft wide pavement were cut later by a different machine.

The boards on the float are so arranged that they can be adjusted to make a plane section or a crowned section—on this job the crown of the original pavement was retained. A short board on the front of the float near the center can be adjusted to throw the windrow of accumulated mortar to either side as needed. A separate, independently mounted board on each 12 ft half of the rig is used as the strike-off board in making the final pass.

Tie bars at 30 in. centers were required by the state—as would be the case if the concrete were laid in two separate 12 ft wide strips. The contractor developed an attachment to the spreader, which consisted of two discs having a 90 in. circumference, with notches cut in the discs to give the 30 in. spacing. A workman placed the bars in the notches and the discs rotated as the spreader moved forward to place the bars 4 in. into the concrete.

Transverse joints were sawed every 15 ft and a longitudinal point was sawed down the pavement center. Transverse joints were cut by a two-bladed wheel-mounted, pavement saw. The longitudinal joint, cut after the side forms had been stripped, was made by a machine that rode the pavement edge and mounted a single blade.

The specifications permitted sawing of joints at any time. Since the paving was done in cold weather, the concrete set slowly, so that about 30 hours elapsed between placing and sawing. Due to the time interval, the joints did not ravel.

George T. McCoy is state highway engineer for the California Division of Highways. The Bakersfield job was under the direction of William L. Welch, district engineer for District VI. Norman Lambeth was resident engineer. Bruce McDonald was general superintendent for Griffith Co.

IT TAKES 4 TIMES THE POWER TO STOP THEM AS TO RUN THEM

Acco Tru-Stop Disc Brakes have that braking power —they stop and hold them safe and sure at lowest cost

• When an ACCO TRU-STOP DISC BRAKE says "Stop!," it *means* "Stop"—a quick, positive stop that prevents accidents in emergency situations.

Actually, in terms of horsepower, it takes four times the power to *stop* mobile equipment as to *run* it. TRU-STOP Disc Brakes have proved their ample braking power and their complete dependability in making safe stops—even on steep grades! Long recognized as superior emergency brakes for trucks and buses, they have won increasing acceptance as the best brakes for tractor excavators, cranes, bucket-operating mechanisms, shovels—all types of heavy-duty motorized construction and earth-moving equipment.

Owners and operators of a wide variety of mobile equipment, conscious of danger to men, machines and property from accidents caused by inadequate braking power or brake failure, have come to realize the true economy of insisting on TRU-STOP Disc Brakes.



SURPLUS BRAKING POWER

Here is a brake that will outperform and outlast brakes of conventional types. TRU-STOP Disc Brakes not only have adequate power for all emergency braking—*they have surplus power*, more than enough to handle even the most difficult situation! That's because of their unique design and construction.

TRU-STOP BRAKES BREATHE!

The TRU-STOP Disc Brake cools itself faster than any other known type of brake because it is ventilated to throw off the intense heat generated by braking. It "breathes" because most of the disc is exposed to the air even during braking. Cool air circulates between the plates, carrying off heat.



UNIFORM PRESSURE ALWAYS



Another big advantage of the TRU-STOP Disc Brake is that the braking pressure is always controlled and uniform. The disc is "squeezed" between the flat surfaces of the shoes; pressure is in direct proportion to the pull exerted on the brake lever. *There is no dangerous self-energizing.* Braking is always effective . . . stops are smooth . . . linings have long life . . . down-time and maintenance are kept at a minimum.

By any standard, TRU-STOP Disc Brakes give you better, safer braking over a longer service life than any other type brakes you can buy. They save far more than they cost. And—they are typical of ACCO BETTER VALUES.

Automotive and Aircraft Division
AMERICAN CHAIN & CABLE

601 Stephenson Building, Detroit 2
2216 S. Garfield Street, Los Angeles 22 • Bridgeport 2, Conn.

ACCO

A better roof or floor slab results at lower cost when architects and contractors agree on Steeltex Floor Lath, the wire mesh reinforcing that carries its own water-proofed form right on its back. Steeltex can be unrolled, stretched as in the photo above, and clipped with simple tools by workmen without previous training.

Steeltex saved 6½ days on 14,000 sq. ft. roof deck

Pressure on school boards, architects and contractors to finance, design and build new schools is greater than ever.

Although a record 62,000 new classrooms were built in 1956, educators say the nation needs at least 93,000 more each year for the next 10 years.

School boards demand the best value for each construction dollar. They also want their new schools placed in service as fast as possible. A Michigan contractor, to cite a case in point, responded to this need by saving 6½ days on a school job by his wise choice of materials.

The contractor is The Charlson Company of Wyandotte, Mich., who saved a week's working time on the Ecorse Elementary School in Michigan by using Pittsburgh Steel Products' Steeltex Floor Lath. With Steeltex the roof was prepared for concrete pouring in 28 working hours, compared to an estimated two weeks if other forms had been used.

The job called for laying about 14,000 square feet of Steeltex over joists in preparation for pouring a 2½-inch concrete slab. Steeltex' time savings were made more impressive by the fact that the Charlson crew had never before worked with Steeltex. Also, the job was complicated by numerous columns and other irregular shaped objects on the roof deck.

William Johnson, construction superintendent on the job, said use of Pittsburgh Steeltex—the wire mesh reinforcing that carries its water-proofed form right on its back—per-

Steeltex is economical . . . . . easy to form . . . . . fits irregular shapes.

These photographs show some of Steeltex' money-saving advantages. Above, rods welded to joists eliminate diagonal bridging. Steeltex and concrete give joists lateral stability.

Since Steeltex Floor Lath is easy to bend and cut, one man covered this depressed area in a few minutes. John Casey, architectural superintendent, points to the neat finished job.

Steeltex requires no engineering to make it fit snugly around irregular shapes. On this job, columns were left protruding through the roof to support a future second story.

mitted his men to start laying Steeltex on a Wednesday morning and complete the job Monday noon, just 3½ days later.

Steeltex, sold by the Pittsburgh Steel Products Division of Pittsburgh Steel Company, was specified by the Detroit architectural firm of Giffels & Vallet, Inc., L. Rosetti, Associated Engineers and Architects.

The specification pleased President K. H. Charlson of The Charlson Company who said:

"Steeltex definitely was the best choice. It is a good product that is easier to cut and shape than other material. The paper backing reduces dripping and eliminates clean-up problems on the floor below.

"Steeltex is economical to buy, saves a lot of costly, time-consuming work and produces a high quality concrete slab with good reinforcing."

You, too, can reduce costs and pour concrete decks quicker while improving the quality of floors and roofs—when you use Steeltex.

The special advantages of Steeltex will work as well for you as for this Michigan architect and the contractor.

A trained Pittsburgh Steel Products engineer, with lots of construction know-how, is available close at hand. Call him at any of the district offices listed here. Do it today.

You eliminate messy drip-through on the floor below when you use Steeltex. Mesh and water-proofed paper backing can be fitted right to the edges of objects like this sump on the roof deck.

▶ **See Sweets Catalog Section 2-B**

Steeltex®

Pittsburgh Steel Products

a division of Pittsburgh Steel Company

Grant Building • Pittsburgh 30, Pa.

District Sales Offices

Atlanta	Columbus	Detroit	New York	Tulsa
Chicago	Dallas	Houston	Philadelphia	Warren, Ohio
Cleveland	Dayton	Los Angeles	Pittsburgh	

Just in time for the Jamestown Festival, Williamsburg, Va. completes satellite facilities that will free its restored area of 20th Century distractions

Authentic in architecture . . .

ENR Staff Photo

and atmosphere of Colonial days . . .

Williamsburg Guards Its Character

Williamsburg, Va., where American freedom was born, still has a job of maintaining its own freedom—this time from 20th century encroachment. The solution being tried—separation of the necessary modern service facilities from the central colonial village — has occasioned recently the investment of $9 million in an information center and other facilities for visitors on one side of the restored area and of $2 million in a shopping center farther out on another side.

Both of these installations have involved a design and construction task of considerable size and interest. Work on the information center particularly has been on a rush schedule in order to have it completed in time for the Jamestown Festival beginning this spring. This will be the celebration of the 350th anniversary of the founding of the first permanent English settlement in America—and Williamsburg's neighbor and predecessor as the capital of the Crown Colony of Virginia. Since Williamsburg has the only overnight accommodations in the area, and because it is the more extensive of the two historic attractions, it will be the scene of intense activity during the rest of 1957.

• **Success creates problem**—The crowds, which the Jamestown Festival will attract, merely typify Williamsburg's continual problem. For, restored to its 18th century character over the last 30 years through the generosity of John D. Rockefeller, Jr., this unique town is in a paradoxical situation. It wants visitors—indeed, it was conceived to promote an appreciation on the part of every American of the beginnings of our country and our form of government—but the greater its success as an attraction, the more difficult becomes the task of maintaining the atmosphere of its early days.

And Williamsburg has been unusually successful as an attraction. Today after an expenditure of more than $5 million, it includes 130 acres of restored area, 90 acres of greens and gardens and over 450 restored or reconstructed buildings. Since the restoration began some 8 million persons have visited it. The annual number is now 750,000, which it is estimated will be 1 million by 1960.

INFORMATION CENTER BUILDING includes two theaters, shown projecting from either end. On this side the bus loading dock is at ground level and the exhibition hall above.

ADMINISTRATION BUILDING for the motor houses, which can be seen through

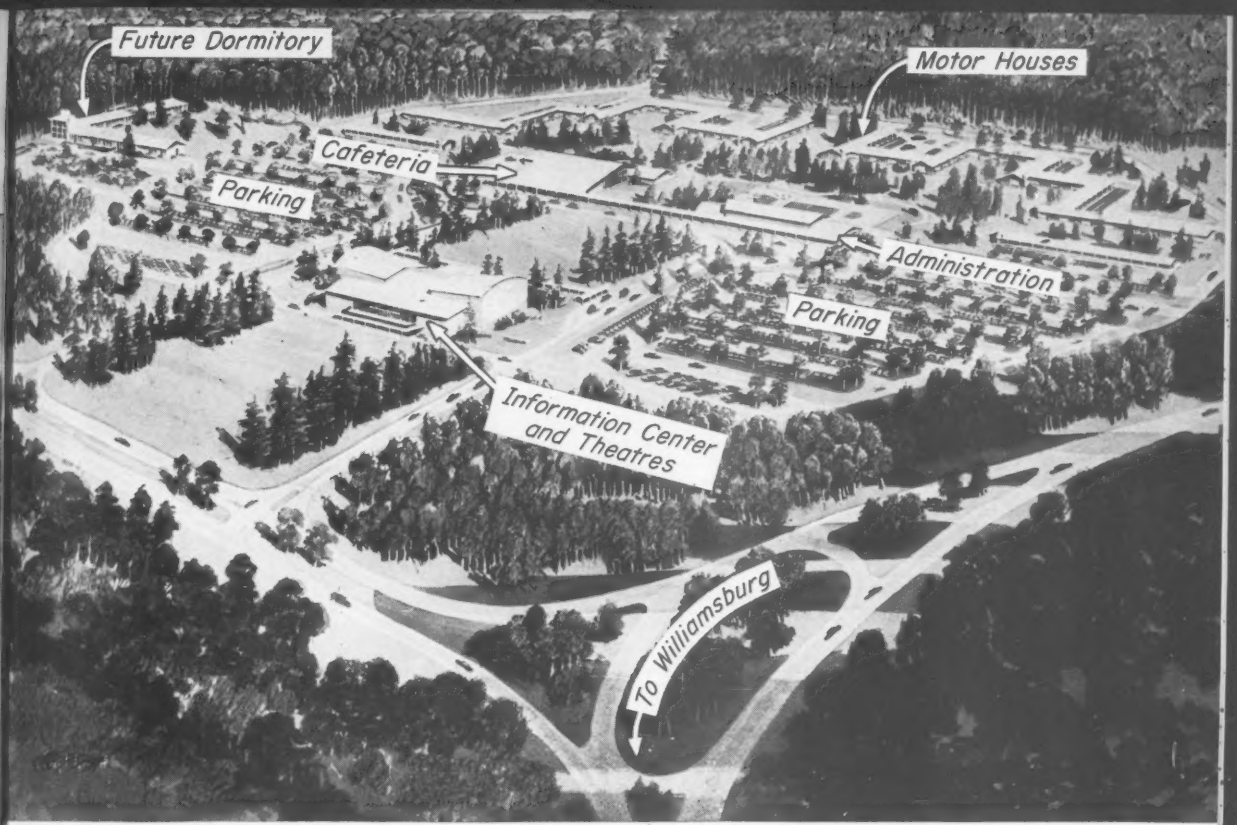

NEW RECEPTION CENTER will introduce visitors to the town's history and significance and provide for their rest and recreation.

The town's problem arises because these visitors require places to eat, sleep and to park their cars. Moreover, it is necessary to provide auditoriums and other information points where the visitors can be briefed on the town and its early history. There are also the permanent residents who must have stores in which to shop, banks, churches and schools.

Some residents can be housed in restored buildings without violating their original character; other facilities can be provided in new structures which are in keeping with the colonial architecture of the area and which can be fitted in on the fringes of the restored area.

Both of these devices have been used, but now the limit has been reached. Not only would more 20th century facilities lessen the atmosphere of the restored area, but space for them is no longer available.

• **Study point solution**—The problem was foreseen as early as 1948, when an unusually comprehensive study of the town's future was undertaken. Two of the conclusions of that study were: (1) A new, separated shopping center would have to be provided; and (2) the reception of visitors and their briefing should be transferred from the restored area itself to an outside site, where cars could be parked and living quarters provided, and which could be developed as an attractive and instructive entrance to the colonial village.

The first of these satellite areas—the shopping center—presented no special problems over those encountered for

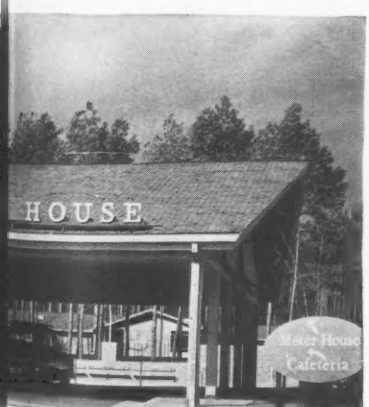

the covered driveway. Right, cafeteria as viewed from the administration building.

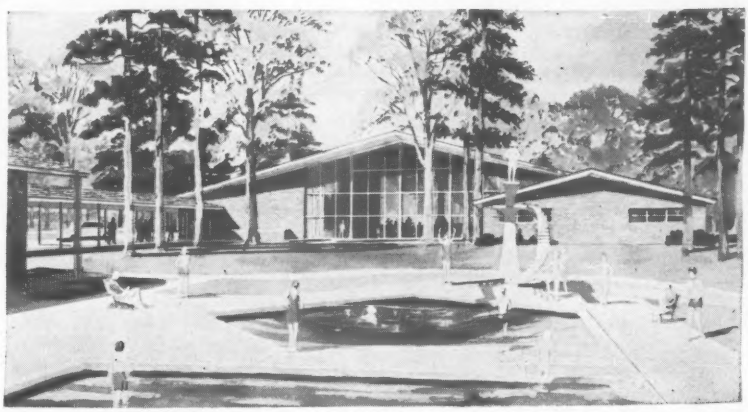

THE SWIMMING POOL on the lawn between these two buildings furnishes a central element for this service building group.

FLOOR SLABS for the motor houses were prefabricated in 12 x 14 ft units that were set (right) onto the foundations by a truck crane.

like facilities anywhere. It was required to be pleasing in appearance and in good taste, but it was far enough removed from the central town not to affect its atmosphere.

The second area, the reception center, however, was quite different. It had to be within reasonable distance of the center of the town, and, as a transition point from 20th to 18th century conditions, its architecture and its appointments had to be designed in such a way as to reflect this situation subtly and unobtrusively.

Fortunately, a suitable site was available. Hidden from the restored area by topography and trees, it encompasses an area of 40 acres that is situated between the two main highway entrances to Williamsburg—the Colonial Parkway from Yorktown and US 60 and 168 from Richmond in one direction and Norfolk in the other.

Within this area the information center has been developed on spacious lines. In addition to parking areas for more than 1,000 cars and buses, there is an information building, a hotel administration building, a cafeteria and a group of motor houses providing 216 rooms and swimming facilities for visitors.

Also included in the ultimate plan for the satellite facilities, but not yet built, are two dormitory buildings to accommodate 200 school children, a type of visitor which numbered 50,000 last year.

• **A unique building**—The main building of the group is the information center, a structure of 1.4 million cu ft incorporating, in a novel layout, a large lobby, lounges, an exhibition hall, extensive toilet facilities, two 250 seat theaters and a station for the free transit buses that take visitors around the restored area of the town.

In plan, what might be called the core of the building is H-shaped; the theaters are inserted between the legs of the H. One leg of the H accommodates the entrance including toilet rooms on either side and two lounge rooms beyond. The cross member of the H is a large theater lobby and information area, while the other leg of the H is devoted to an exhibition hall and historical museum.

All of the above constitutes the ground floor of the building, the bus handling facilities being below, with access to them by an escalator from the lobby area.

Actually, since the building is on a hillside, the bus facilities are also at ground level—on the exhibition hall side. They include a foyer, which opens onto the bus loading dock, and behind which are other extensive rest room facilities and a small assembly hall. The remainder of the basement is occupied by offices for the administrative staff, mechanical rooms and exhibit storage areas.

The theaters, which lend the dominant architectural tone to the building, are placed, as noted, on either side of the central lobby. There are two of them so that two identical 37 minute films can be shown simultaneously, but with their starting times staggered so that no visitor has to wait more than 20 minutes to enter a theater. Having two theaters also makes possible a more flexible evening program of films and lectures.

• **Theaters for comfort**—About 75 ft wide and 95 ft long, each of the theaters has a curved outside end wall, a functional architectural detail since the wall accommodates the 48 ft wide curved screen on which the films will be shown. This end of the theater is also made wider than the entrance end so that the sidewalls will angle outward from the line of sight of those in the seats. Also, these sidewalls are made severely plain so as to avoid any distraction from this source.

And further as an aid to the viewers, the rows of seats are arranged in steep (1 ft) steps, a low wall is placed in front of each row in order to furnish a feeling of isolation, and the rows are made continuous across the theater to aisles at either side.

The information center building is framed in structural steel and, because of the large rooms, extensive use is made of roof trusses. Two lines of these trusses run completely through the building from the entrance lounges (32 ft span), across the main lobby (58 ft span), and over the exhibition hall (40 ft span).

Trusses also span the 75 ft width of the two theaters. Steel beams span in the opposite direction between trusses, the largest and longest (16 in. 36 lb x 25 ft) being over the main lobby where they are employed to carry a projection room that serves both the theaters.

Basement walls and all floors are reinforced concrete, while the exterior walls of the building are of brick, relieved by large glass areas on the exhibition hall side.

The information center building will serve all visitors, but two other groups of buildings are focused on the needs of those who may wish to rest, eat or spend the night.

One group is composed of the cafeteria and administration buildings, which are in line with each other, connected by a continuous covered walk and facing the information center building across a grassed lawn. A swimming pool is located to the rear of the administration building.

The second group of buildings comprises the motor houses, made up of 12 buildings—straight, L-shaped and U-shaped—arranged in serpentine fashion across a plot 1,350 ft long and 350 ft deep.

• **For eating and heating**—The cafeteria is T-shaped in plan, with the kitchens and service facilities in the 200 x 50 ft head of the T, and the dining room, lounges and gift shop in the 96 ft long and 120 ft wide stem. Framed in struc-

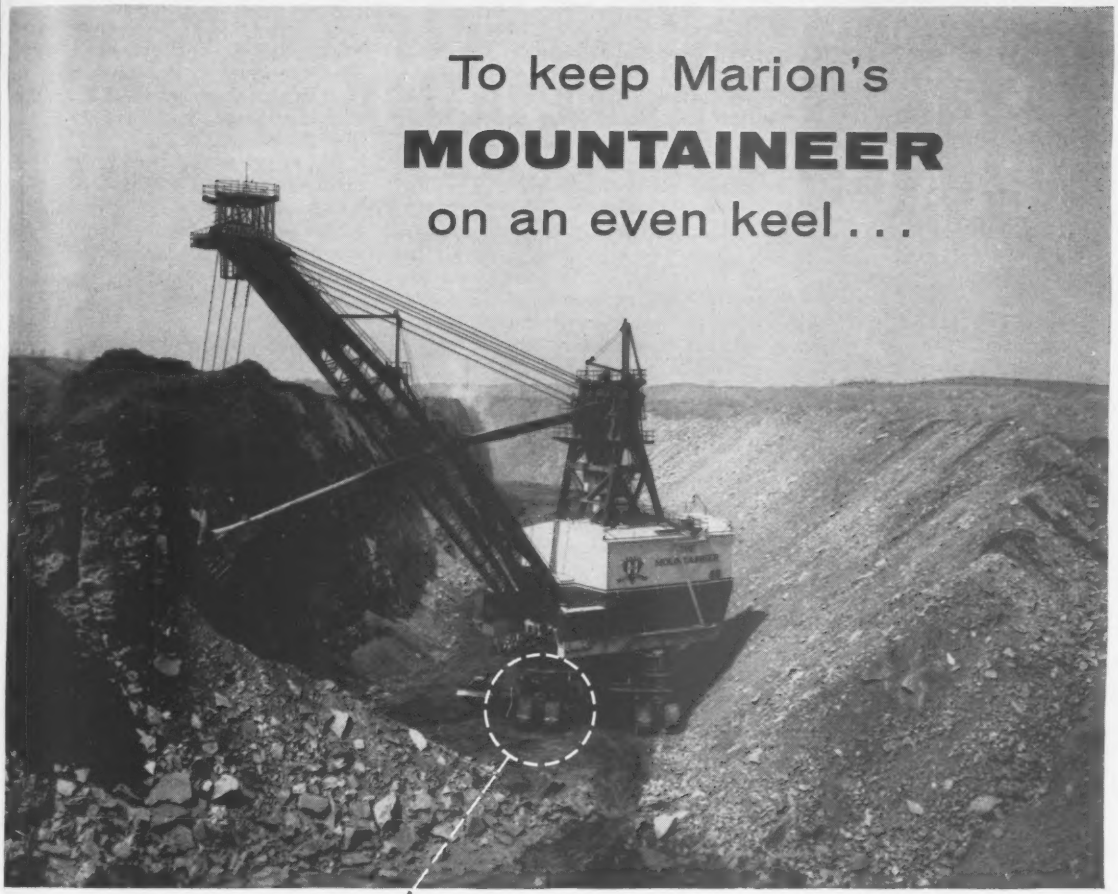

hydraulic leveling with **DENISON** 5000 psi pumps

The size of an automobile, this crawler on the Mountaineer supports each corner of the main frame through a hydraulic jack to keep the huge power shovel level on uneven ground. Denison hydraulic pumps provide the power to operate the jack.

THE WORLD'S LARGEST POWER SHOVEL is at work stripping overburden in one of the Hanna Coal Company's Ohio mines. This 5½ million pound colossus is the largest mobile land machine ever built in the United States, stands as high as a 16-story building, can scoop up 60 cubic yards of dirt at a time, yet is controlled by just one man.

In strip mining, the Mountaineer is often subjected to rough terrain. To control the level of its 2750-ton bulk, there is an automatic, electrically-controlled, hydraulic jack at each of the four corners of the huge frame. In operation, these jacks keep the revolving upper frame and superstructure level, even though the machine may be standing on uneven ground.

Marion Power Shovel selected Denison equipment for its reliability . . . its quality of manufacture . . . its proven performance record. Let them be your guideposts, too, for construction equipment which bears the Denison name on hydraulic parts delivers lasting, economical service.

For information on Denison hydraulic presses, pumps, motors or controls, write Denison Engineering Division, American Brake Shoe Co., 1172 Dublin Road, Columbus 16, Ohio.

Your guide to better performance in construction equipment

DENISON Hydr**O**il*ics*

WELDED or RIVETED
STEEL PLATE FABRICATION

- Boiler Casings
- Boiler Breechings
- Flues and Ducts
- Condenser Shells
- Condenser Piping
- Heavy Turbine Housings
- Fan and Blower Housings
- Dust Collector Housings
- Industrial Gas Mains
- Expansion Joints
- Hoppers and Bunkers
- Tanks and Vats
- Pressure Vessels
- Wind Tunnels
- Crane Bridge Girders
- Trolley Frames and Trucks
- Rigid Frames
- Roll-Over Fixtures
- Tank Turrets
- Gun Mounts
- Heavy Truck Bodies
- Engine Frames and Bases
- Crawler Frames
- Press Platens and Beds
- Press Columns
- Heavy Machinery Parts and Assemblies
- Gas Seal Hoods for Blast Furnaces
- Furnace Roof Rings
- Design Conversion of Castings to Weldments

MACHINING

- Complete Machining Service—Facilities for Heavy Work of Unusual Dimensions

STRUCTURAL STEEL

- For Buildings, Bridges and Special Purpose Structures
- Drum Gates
- Roller Gates
- Taintor Gates
- Taintor Valves
- Protection Angles

THE R. C. MAHON COMPANY
DETROIT 34, MICHIGAN
Branch Offices in New York and Chicago
MAHON

. . . Williamsburg visitor is well housed

tural steel, it has a gabled roof 80 ft long on each side from ridge to eaves, and incorporates 57 ft span trusses over the dining area. The end walls are largely glass in wood frames, extending from the ground to the ridge line. Enclosure elsewhere is brick. The roof covering is slate.

The cafeteria, with concrete rib floors, is built over a full basement, the feature of which is a 58 x 107 ft room in which the central heating and air conditioning plant for the entire project is located. Pipe tunnels, 5 ft in dia, run from this room to all of the other buildings.

The principal feature of the heating plant room is its 18 in. thick concrete slab floor, heavily reinforced to provide support for the equipment and resistance against uplift pressures from the unusual soil on which it rests.

Basement walls are also of reinforced concrete rigidly joined to the floor slab. Special care had to be used in building one of these walls since it was adjacent to a large water supply line, which crossed the site and had to be kept in service.

To hold the clay bank from sloughing away from the pipe, the adjacent basement excavation was carried down in alternate sections. Inclined timber braces were then placed against the vertical clay face in the opened sections, bearing at the other end against a temporary toe wall installed inside of where the basement wall would be built. The remaining excavation was then finished. As soon as the basement wall and counterforts were completed in one section, the braces were transferred to bear against it until the final backfill could be placed.

The administration building, similar in construction to the cafeteria, is considerably smaller, 42 x 162 ft in plan, but contains two stories and a basement. The second floor is entirely devoted to offices, while the first floor also includes a large lounge, social room, TV room, etc., for the accommodation of the guests of the motor houses, and a lobby, business office and registration desk for their use.

• **Attractive, efficient housing**—Unusually careful planning was accorded the motor houses so that they would reflect, both in appearance and living qualities, the high class character of the development. Thus they are oriented toward the grassed plaza and swimming pool of the cafeteria-administration building layout, with large glass windows on this side, but no doors. Entrances are all at the rear where there is a covered walkway connecting all rooms in each unit for the convenience of visitors and adjacent to parking areas. Each building, containing from 15 to 20 living units, is separated from its neighbor buildings by an aisle so that occupants can get from the back to the front on the outside.

In contrast to the other buildings in the development, the motor houses are brick veneer on wood frame, in a simple design using prefabricated interior wall framing, precast floor panels and gabled roof trusses. The buildings are about 24 ft wide, but the roofs also extend over the rear walkways, so the trusses have a 27.5 ft span between outside supports, and in addition have a 3 ft 10 in. overhang at the eaves at either side. Prefabrication of wall panels and trusses was carried out in a central carpenter shop from where the units were moved to the building sites and set in place with truck cranes.

Prefabrication was also used for the 5 in. concrete floor slabs. These were cast in each courtyard, in units of 12 x 14 ft, one on top of another, using 5 in channels as edge forms. With the forms in place a welded reinforcing mat was installed, and the concrete placed from a mixer truck. The slab was then covered with a kraft paper for a separator, the channel forms raised, and the process repeated.

The foundations, which received these precast slabs, consisted of outside concrete walls around a walkway pipe space (there are no basements), and a row of concrete columns on the building centerline, which had been cast in circular, waxed cardboard forms. The slabs were installed on these supports by a truck crane using a job-made lifting frame that picked up the slabs at the four corners.

• **Job planning and administration**—An unusually large group of architects, engineers and specialist consultants collaborated in the planning and design as shown in the accompanying list. Colonial Williamsburg's construction and maintenance department, under the direction of Charles E. Hackett, carried out all construction work and coordinated and directed the efforts of many sub-contractors. Landscape construction was under the supervision of Alden Eaton, Colonial Williamsburg's director of landscape construction and maintenance.

The principal subcontractors were Wachter & Wolff, Richmond, for heating, air conditioning and plumbing, and Chewning & Wilmer, Richmond, electrical contractors.

In the development and execution of this reception center project, as in the whole of the Williamsburg restoration since the beginning, the technical direction has come from A. Edwin Kendrew, the resident architect. Thirty years ago,

Look where **HIGH STRENGTH BOLTS** give **better connections**

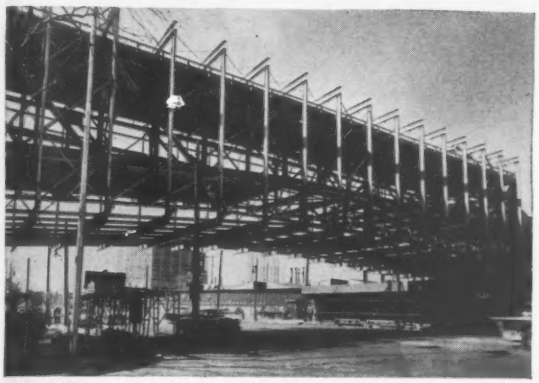

BRIDGES Here's one put up in Detroit with RB&W High Strength Bolts. They were used because they install faster than rivets, stay tight, withstand all kinds of cyclic loads, including wind, vibration.

BUILDINGS More and more multi-story steel framed buildings are being erected with high tensile bolts. It means faster construction, dollar-savings per ton of erected steel, less noise, more safety.

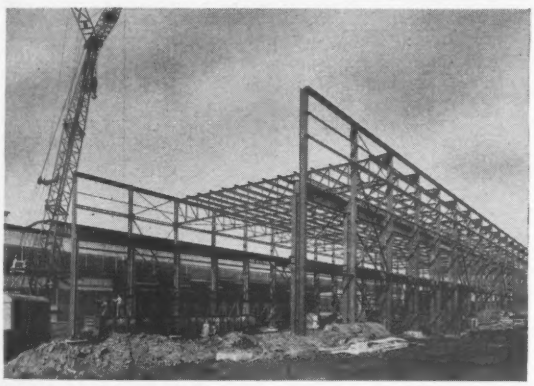

INDUSTRIAL PLANTS Erectors of mills, power houses, heavy industrial works and factories are taking advantage of RB&W High Tensile Bolts to give joints more strength in shear and in tension against impacts and stress changes due to operation of cranes and heavy machinery.

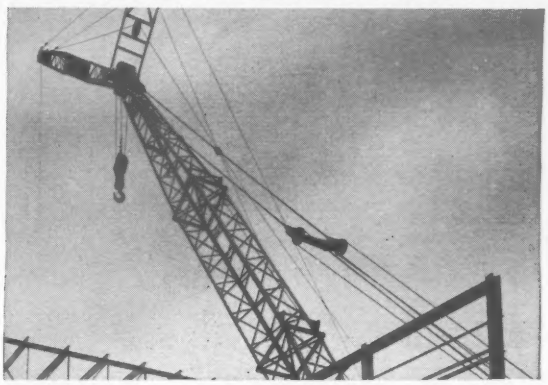

EQUIPMENT RB&W High Strength Bolts are doing a permanent retightening job on heavy duty equipment that has deteriorated due to rivets failing. They've saved large costly cranes. By specifying the use of high strength bolts in your new equipment, you can avoid such problems entirely, save money and downtime.

AISC approves the use of high strength bolts anywhere in place of rivets. Local building codes permit it. So there's no reason why you shouldn't get the savings in time and costs they offer... the better, stronger joints they make.

And remember—the quality and uniformity of RB&W High Tensile Bolts and their conformance to ASTM A325 have been confirmed in a report by the nationally known New York Testing Laboratories, Inc.

Give your men this booklet: "How to work with high strength bolts." Write for as many free copies as you need. Russell, Burdsall & Ward Bolt and Nut Company, Port Chester, N. Y.



R B & W

111th year

Plants at: Port Chester, N.Y.; Coraopolis, Pa.; Rock Falls, Ill.; Los Angeles, Calif. **Additional sales offices at:** Ardmore (Phila.), Pa.; Pittsburgh; Detroit; Chicago; Dallas; San Francisco. **Sales agents at:** Milwaukee; New Orleans; Denver. **Distributors** from coast to coast.

LARGEST INDEPENDENT PRODUCER OF HIGH STRENGTH BOLTS FOR CONSTRUCTION

WILD
HEERBRUGG

T-3 Precision Theodolite

A WILD instrument designed for highest accuracy, time-saving conveniences, and a remarkable work potential

The Wild T-3 Precision Theodolite is the supreme instrument in its class . . . for accuracy . . . versatility . . . and for its proved reliability in virtually all conditions of weather and climate.

The T-3 is an ultimate instrument for Geodesy and for precision triangulations. It has a distinguished record in triangulating the longest bridge spans in the world.

NOTABLE FEATURES OF THE WILD T-3

- Performs triangulations of the first and second order.
- Circle reading direct to 0.2 seconds.
- Telescope magnification 24x, 30x, 40x.
- No eccentricity error.
- Ideal for ultra-precise measurements in industry and laboratory.

Write for Booklet T-3 . . . and use the Wild Heerbrugg advisory services without obligation.

WILD HEERBRUGG INSTRUMENTS, inc.

Main at Covert Streets . Port Washington, N.Y. POrt Washington 7-4843

SALES • FULL FACTORY SERVICES

. . . Williamsburg

when a young man in the employ of the Boston architectural firm of Perry, Shaw & Hepburn, he was sent to Williamsburg as almost his first assignment to report on a request from John D. Rockefeller, Jr., that the firm undertake a study of the possibilities of restoration. The report was favorable, the firm was engaged and has remained through the years as the prime consulting architects. Kendrew, first with the firm and since 1934 with Colonial Williamsburg, Inc., has thus devoted much of his professional career to this one architectural enterprise.

Architects, Engineers and Consultants for Williamsburg Information Center Area

Colonial Williamsburg staff:

A. Edwin Kendrew
Resident Architect and Vice President
Mario E. Campioli
Director of Architecture
Ernest M. Frank
Assistant Director of Architecture
Thomas W. Drewry
Resident Mechanical Engineer
Alden Hopkins
Resident Landscape Architect

Consultants:

Harrison and Abramovitz, New York
Consulting Architects
Cleverdon, Varney & Pike, Boston
Structural Engineering Consultants
Wiley & Wilson, Richmond, Va.
Design Engineers for Mechanical, Electrical, including outside utilities and roadwork
Wilbur S. Smith Associates, New Haven
Traffic and Parking Consultants
Bolt, Beranek and Newman, Cambridge, Mass.
Acoustical Consultants
Benjamin Schlanger, New York
Theater Consultant
Wayne A. Becker, Cincinnati, Ohio
Swimming Pool Consultant
Tom Lee, Ltd., New York
Interior Consultant—Motor House
Becker and Becker Associates, New York
Merchandising Consultants
Howard L. Post, New York
Food Service Consultant
George Nelson Associates, New York
Exhibitions Consultant
Gerald Ewing, Wilton, Conn.
Lighting Consultant

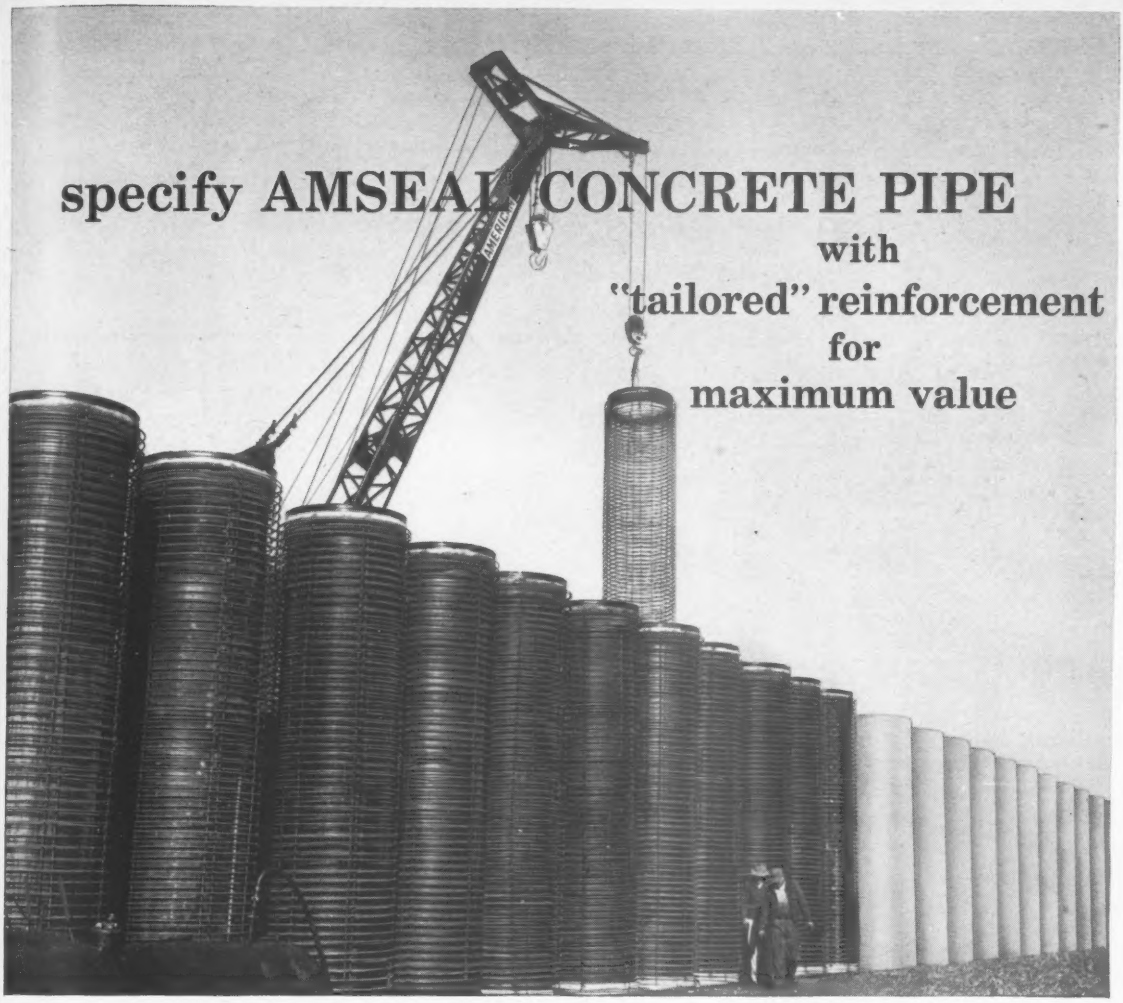

another example of

PROGRESS IN CONCRETE



The vital steel "backbone" of concrete pipe is a large part of its cost. Savings are possible with AMSEAL because its reinforcing is custom designed for each specific job. Precision machines make full length "cages" by winding steel spirally with effective control of diameter and spacing. A rigid backbone structure is formed by welding properly positioned longitudinal steel rods to the spirals.

The widely-used AMSEAL rubber and steel joint can mean freedom from worry about leakage or infiltration. Long 16-foot lengths mean less joints and faster installation.

Specify AMSEAL Concrete Pipe for life-long economies on your job.

AMERICAN-MARIETTA COMPANY
CONCRETE PRODUCTS DIVISION
GENERAL OFFICES:
AMERICAN-MARIETTA BUILDING
101 EAST ONTARIO STREET, CHICAGO 11, ILLINOIS, PHONE: WHITEHALL 4-5600

Fenestra packages hollow metal door, frame and hardware units to save you up to $100 per opening with this . . .

NEW IDEA

Look like costly custom-made doors, don't they? They're not. They're stock doors by Fenestra®—with an installed cost about $100 *less* per opening than you'd expect to pay!

Fenestra's new idea for saving you money on school doors is really very simple. We mass produce them on special jigs that save us expensive labor. pass along this savings to you. We maintain l stocks of standard sizes to give you fast delivery doors come to your building complete with fra and hardware, ready to install. You don't have cut, fit, mortise, drill or tap a Fenestra Door.

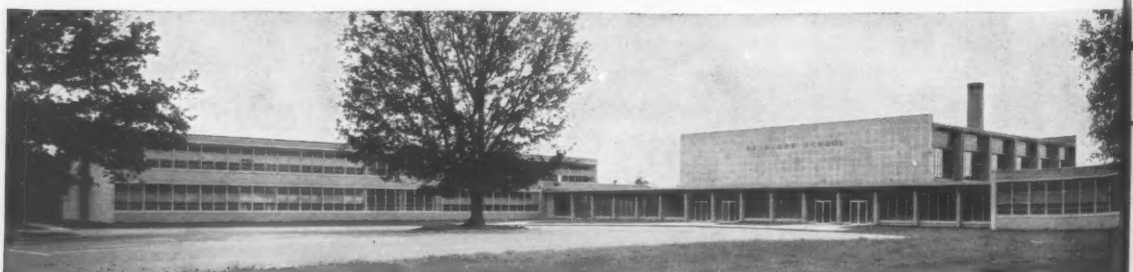

REIDLAND SCHOOL, Paducah (Reidland), Ky., cost less to build because 134 Fenestra 1¾" Hollow Metal Flush Doors w used. *Architect:* G. Tandy & Lee Potter Smith, Paducah, Ky. *Contractor:* Erhart-Knopf Construction Co., Inc., Louisville,

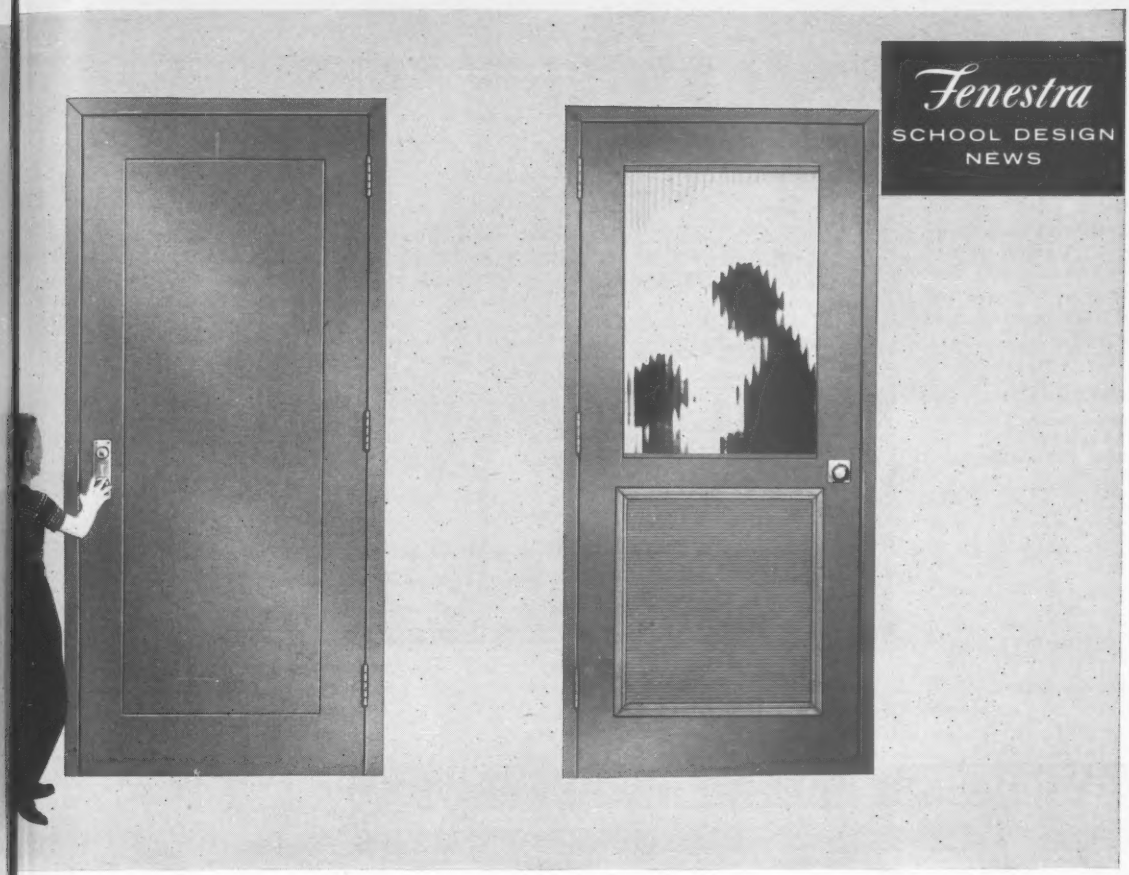

FOR SCHOOL DOORS

...n with a *screw driver* can install it *in minutes.* ...enestra Hollow Metal Doors swing open smoothly. ...ey close quietly because there's a sound-deadening ...terial inside. You save, year after year, on mainte... ...nce because Fenestra Doors can't warp, swell, ...k or splinter. They last a lifetime!

Illustrated are Fenestra's 1¾" Entrance Doors, 1¾" Flush Door and the NEW 1¾" *Fin-Air* Louvered Door for air-conditioned buildings—three of the many fine doors in Fenestra's complete line. Call your Fenestra representative for detailed information or mail the coupon below.

Fenestra INCORPORATED

HOLLOW METAL DOOR • FRAME • HARDWARE UNITS

Your Single Source of Supply for DOORS • WINDOWS • BUILDING PANELS

Fenestra Incorporated
ER-4, 2286 East Grand Boulevard
Detroit 11, Michigan

Please send complete information on Fenestra Hollow Metal Doors

Name_____

Firm_____

Address_____

City_____ State_____

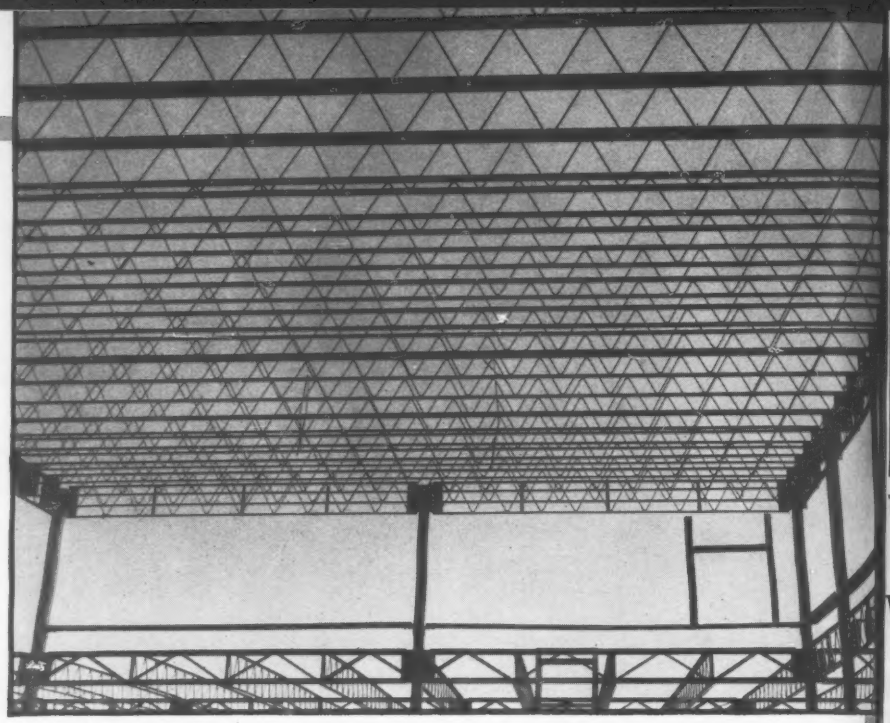

The Mother Seton School, Emmitsburg, Md., erected by American Bridge, included 134,400 pounds of structural steel and joists; 45,100 pounds of roof deck; 2,500 pounds of shop weld rods; and 9,600 pounds of well and curb liners. Porcelain-enamel steel wall panels were supplied by U. S. Steel Homes.

Architect: Earl M. Harvey
Contractor: Structo Schools Corporation—Boston
Industrial Engineering Co.
—New York



Strong, lightweight AMBRIDGE STEEL JOISTS

support roof deck of new "Structo"-built Mother Seton Schoo

THE MOTHER SETON SCHOOL of the Daughters of Charity of St. Vincent De Paul in Emmitsburg, Maryland, one of the first "Structo Schools" ever built, combines the use of factory-fabricated porcelainized steel wall panels and AmBridge Steel Joists.

It is significant that this revolutionary type of school construction utilizes AmBridge Steel Joists with framing trusses and square tubular columns to support the steel deck roof.

These joists with square ends and moment-connections not only provide strong, rigid, lightweight support for the 57 lb. per square foot roof load, but also offer collateral advantages of continuity for wind loads which make them ideal for use in floor, roof and ceiling construction.

This open-web design allows free passage of conduits, pipes and ductwork in any direction. Their ease of erection cuts installation time to the bone. Use them in roofs to get your structure under cover sooner; use them in floors so that other trades can begin work more promptly, helping to maintain work schedules.

AmBridge Steel Joists are fabricated and assembled on production lines by American Bridge Division, assuring uniform production, delivered to your job on time.

Get in touch with our nearest contracting office for complete information about how AmBridge Steel Joists can save you time and money on your next job.

AMERICAN BRIDGE DIVISION, UNITED STATES STEEL CORPORATION · GENERAL OFFICES: 525 WILLIAM PENN PLACE, PITTSBURGH, PA.
Contracting Offices in: AMBRIDGE · ATLANTA · BALTIMORE · BIRMINGHAM · BOSTON · CHICAGO · CINCINNATI · CLEVELAND · DALLAS · DENVER · DETROIT · ELMIRA · GARY HOUSTON · LOS ANGELES · MEMPHIS · MINNEAPOLIS · NEW YORK · ORANGE, TEXAS · PHILADELPHIA · PITTSBURGH · PORTLAND, ORE. · ROANOKE · ST. LOUIS · SAN FRANCISCO · TRENTON
UNITED STATES STEEL EXPORT COMPANY, NEW YORK

AMBRIDGE STEEL JOISTS

USS

UNITED STATES STEEL

Twin schools — one built in 1954 (above), the other in 1956. Cost of second school is up 26%

Where the School Dollar Goes

Twin schools in North Haven, Conn., almost but not quite identical, one built in 1954 and the other in 1956, show a 26% price rise in two years. The contractor, Ames Construction Co. of Hartford, is the same for both and this is the increase in his low bid for the new Fitch Street Elementary School. The 1956 high bid was up 40% over the high bid received in 1954.

Materials and labor costs have gone up only 10% to 15% in these two years, as measured by the ENR Building Cost Index. The faster rise in contractor's bid prices in the past year follows a 2-year period when contractors' prices lagged behind the rise in costs. Now they are closing up this 1954-56 cost-price gap fast.

Rare in the building business, these parallel school costs are almost as good as a controlled laboratory test for diagnosing the causes and effects back of this price rise.

The similarities, which outnumber the differences, are itemized in the analysis that follows.

The new Fitch Street School has some extras, including a 30x8 ft roofed and glassed-in passageway from the main school to the kindergarten and some differences. These too are pointed out, and their cost is reported where possible.

The two schools are:

IDENTICAL in these respects:

Number of pupils	640
Classrooms: number	18
size, ea, sq ft	812
pupils, ea room	30

Facilities: Kindergarten, 2 room separate building (see also differences), Auditorium-Playroom (50x75 ft), Cafeteria (50x50 ft), General Office, Principal's Office, Teachers' Suite, Library, Remedial Reading Room, Music Practice Room, Field Equipment Building—separate, Custodial Facilities, Two Health Rooms, Kitchen and Walk-in Refrigerator.

Architects, Engineers, Contractors

Architects: Carl J. Malmfeldt and Associates, Hartford, Conn.
Structural Engineers: Marchant and Minges, West Hartford, Conn.
Contractor: Ames Construction Co., Hartford, Conn.
Heating, Plumbing, Ventilating: Hubbard, Lawless and Blakeley, New Haven.

MAJOR DIFFERENCES—In Construction

	Temple 1954	Fitch 1956	Cost Added to base bid
Classroom walls, front & rear	*wood frame asbestos-cement facing— (Increases carpentry cost, see following table)*	*cinder block (Increases Masonry cost, see following table)*	
Gymnasium, end wall	—	*sprayed with: vinyl plastic coating*	*$4,500*
		rubber padding	*650*
Gymnasium, floor	*asphalt tile*	*wood*	*4,600*
In 9 classrooms	—	*stamped steel grills in window sills*	*2,300*
	—	*pole and shelf in teachers closets*	*1,500*
	to 9 rooms—hot water and recirculating lines	*to 18 rooms—hot water and recirculating lines*	*1,900*
Total extras added to base bid			*$15,450*
Effect of of differences on costs of comparable facilities:			
Carpentry & Mill Work	*$47,500*	*$35,550*	
Masonry	*54,835*	*61,000*	
Asphalt tile (incl. gym)	*8,100*	*9,200*	
underlay + gym floor	*820*	—	
Wood floor, gym	—	*4,600*	
Vinyl coating	—	*4,500*	
Total	*$111,255*	*$114,850*	*+ 3.23%*

(Continued on page 66)

BUILD
BRIGHT COLORS
RIGHT INTO
CONCRETE
FLOORS...

And get greater hardness at low cost . . . easily!

TRUSCON
ART-ROC
AGGREGATE

Ready to use . . .
No pre-mixing with cement

Not a paint . . . ART-ROC troweled into the cement surface holds attractive colors safe from attack by cleansers, alkalis or rust. Provides a tough extra-hard surface at no extra cost . . . both for interior and exterior installations. Floors or pavements with ART-ROC are bright and attractive . . easy to clean, economical to keep up.

Colors . . . Hardens . . .
Beautifies . . . Dustproofs!

Just sprinkle on the leveled and floated fresh concrete surface, then work into the surface with a wood float and finish with a steel trowel. You'll be amazed at the brilliance and depth of the two beautiful colors: Tile Red and Spanish Green.

Remember . . . ART-ROC is not just a surface film, but color that's built-in to stay . . and it's so easy to use!

- Terraces
- Porches
- Walks
- Tennis Courts
- Salesrooms
- Recreation Rooms
- Restaurants
- Factories
- Swimming Pools
- Driveways
- Laundries
- Garages

TRUSCON
Laboratories
Division of Devoe & Raynolds Co., Inc.

Resists the Penetration of Water
TRUSCON

Truscon Laboratories, Dept. E-45
Box 69, Milwaukee Junction P.O.
Detroit 11, Mich.

Please send me detailed information about ART-ROC.

NAME_____

ADDRESS_____

CITY_____ ZONE____ STATE_____

MAJOR DIFFERENCES—In Bid Prices and Labor Costs

			Change %
High Bid as % of low	*111.7%*	*124.2%*	——
Base Bids per sq ft, low	*$13.78*	*$17.34*	*+25.83*
high	*15.40*	*21.49*	*+39.55*
Total contract price, with extras, per pupil	*$901.34*	*$1,155.23*	*+28.17*
Materials and Labor Costs:	*1954*	*October 1956*	
ENR Building Cost Index			
Boston	*669*	*744*	*+12*
New York	*742*	*845*	*+14*
20-Cities Av	*455.5*	*500.5*	*+10*

MINOR DIFFERENCES

	Temple St 1954	Fitch St 1956	Change %
Site, acres	*13*	*15½*	*+19*
Number of bidders	*13*	*10*	*−23*
Floor area, sq ft	*41,500*	*41,740**	*+ 0.58*

** Includes covered glazed 30 x 8 ft passageway from main building to kindergarten*

Diagnosis of Cause and Effect of Price Increase

Items Covered	School: Temple Street	School: Fitch Street	Change in: Dollars	Change in: Per Cent
Bid Date	10–27–54	10–5–56		
Floor area	41,500	41,740*	——	0.58%
General Conditions	$12,000	$14,000	$2,000	16.67%
Allowances	28,200	41,000	12,800	45.4
a) Kitchen Equipment	14,667	16,386	1,719	11.72
b) Finish Hardware	5,820	6,355	535	9.11
c) Planting	1,564	na		
d) Stage Curtains	2,590	na		
e) Walk-in Refrigerator	1,469	1,517	48	3.26
f) Booster Heater (for Dishwasher)	290	na		
g) Septic Tank	1,800	a-na		
Site Work	40,400	na		
Fence	550	na		
Concrete Curbs	915	na		
Total	41,865	87,000	45,135	
Footings and Foundations	42,500	53,000	10,500	24.44
Slabs and Beams (Concrete)	17,500	19,000	1,500	8.57
Reinforcing Steel	6,100	6,500	400	6.56
Structural Steel and Steel Joists	39,700	59,000	19,300	48.61
Masonry	54,835	61,000	6,165	16.06
Structural Tile	5,400	6,500	1,100	20.37
Incinerator	250	250	0	0
Precast Roof Deck	29,200	34,000*	4,800	16.44*
Per sq ft	($0.704)	($0.815)		(15.77)
Roofing and Sheet Metal	17,900	19,000*	1,100	6.15*
Per sq ft	($0.431)	($0.455)		(5.58)
Windows and Sills	19,600	27,600	8,000	40.81
Miscellaneous Iron	7,000	7,000	0	0
Hollow Metal Doors and Frames	$1,675	$2,000	$325	19.40
Acoustical Tile	3,500	4,100	600	17.14
Vault Door	480	500	20	4.17
Lath and Plaster	1,800	2,280	480	26.67
Tile and Marble	7,750	8,000	250	3.23
Toilet Partitions	850	945	95	11.18
Carpentry and Millwork	47,500	35,550	(−11,950)	(−25.16)
Filing Cases (built-in)	1,650	1,950	300	12.12
Chalk Boards, Glass (built-in)	2,400	3,900	1,500	62.50
Asphalt Tile and Linoleum	8,100	9,200	1,100	13.58
Glass and Glazing	7,570	10,750*	3,180	42.27*
Per sq ft	($0.182)	($0.258)		(41.76)

(*Continued on page 68*)

CLAY PIPE SERVES Disneyland PAST AND FUTURE

©Walt Disney Productions, 1957

SEWERAGE CONTRACTOR:
Ward Construction Co., Inglewood, Calif.
J. Sam Hammel, Burbank, Calif.

PROJECT ENGINEER:
Louis H. Roth

Clay Pipe serves Disneyland today just as it has been serving thousands of other communities dependably since 1890.

Walt Disney's fabulous make-believe worlds of the past and future at Anaheim, California, are served by timeless Vitrified Clay Pipe. It's the pipe with an unmatched record of past performance . . . and the greatest potential for the future. No matter what wastes may flow into the nation's sanitary systems—tomorrow or fifty years from now—Clay Pipe will go on giving dependable, trouble-free service, because it's chemically inert, completely unaffected by acids and gases from industry or any other source.

At Disneyland, more than 8,000 feet of Clay Pipe in diameters from 4 inches and up provide reliable sanitary protection for the world's most famous playground. Lou Roth, Disneyland Project Engineer, says, "We used Clay Pipe for sewer lines because it was considered the most advantageous material . . ." For sewer installations that must not fail, it pays to specify Vitrified Clay Pipe, the *only* pipe that *never wears out.*

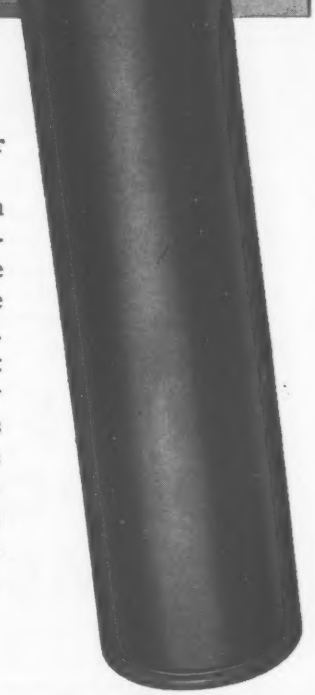

THE PUBLIC *KNOWS* CLAY PIPE IS BEST

Vitrified CLAY PIPE NEVER WEARS OUT!

NATIONAL CLAY PIPE MANUFACTURERS, INC.
1820 N. Street, N.W., Washington 6, D.C.

206 Connally Bldg., Atlanta 3, Ga. • 100 N. LaSalle St., Rm. 2100, Chicago 2, Ill. • 703 Ninth & Hill Bldg., Los Angeles 15, Calif. • 311 High Long Bldg., 5 E. Long St., Columbus 15, Ohio

C-756-1

We Made Double Savings By Pouring Slabs and Columns With the Same Forms

R. B. Barkley, President, Sanford Construction Co., Sanford, N. C.

"We used Atlas Compo Forms to pour culvert slabs for the Winston-Salem East-West Expressway, then used the same forms to pour 30-feet columns. The slab set-up moved easily and quickly and your wedge system eliminated all seepage. On the column set-up a small crew was able to pour two columns each day. We are extremely well pleased."

ATLAS COMPO FORMS

For the easiest and most economical forming on your next job, write or call us now. Atlas Compo Forms are backed with a *cash guarantee of labor saving.*

IRVINGTON FORM & TANK CORP.

20 Vesey Street
New York 7, N. Y.

Items covered	School: Temple Street	School: Fitch Street	Change in: Dollars	Change in: Per Cent
Steel Lockers	2,400	2,650	250	10.42
Painting and Finishing	12,900	17,000	4,100	31.01
Basketball Backstops	850	950	100	11.76
Venetian Blinds	3,225	4,175	950	29.46
Plumbing	35,000	44,000	9,000	25.71
Heating and Ventilating	65,000	86,100	21,100	35.38
Electrical	47,300	35,000	7,700	16.28
Low Base Bid Total	$572,000	$723,900	$151,900	26.55
Per sq ft	$13,783	$17,343		25.83
With Changes—Final Cost	$576,861	$739,350	$162,489	28.17
Per sq ft	$13.90	$17,713	$3.81	27.43
High Bid—Base	$639,000	$897,000	$258,000	40.38
Per sq ft	$15.40	$21.49	$6.09	39.55
High Bid as % of Low	111.71%	123.91%	——	——

*Items mainly affected by 240 sq ft roofed, glazed passageway added to Fitch Street School
a Septic tank (rock conditions, incl. in allowances total)
na not available as a separate price

Refuse Disposal

NYC $80 million program passes halfway mark

New York City's $80-million refuse disposal program has passed the halfway mark. The broad program includes 11 new refuse incinerators, modernization of 4 older ones, 8 new marine transfer stations and improvement of 2 built in 1940, and 3 marine unloading stations. Augmenting the program are temporary rehabilitations and permanent expansion or conversion of some of the facilities mentioned.

The $6-million modernization and rehabilitation of the East 73rd St. Incinerator and Garages (ENR Sept. 1, 1955, p. 51) is nearly completed and operation is expected to be resumed in a very short time. The $5-million Greenpoint Incinerator, however, met a serious setback when foundation difficulties were encountered. Now that these have been overcome, the project, started in early 1956, should be completed in about a year.

The Flushing Incinerator, after undergoing a $250,000-rehabilitation in 1956, is once again in operation.

With design completed, contracts are being advertised for construction of the South Bronx Marine Transfer Station at the foot of Hunts Point Ave. Later in the program, a modern incinerator also will be constructed.

Design has also been finished for an extension of the Betts Ave. Incinerator and contracts are being advertised. Capacity is to be increased from 800 tons a day to 1,000 tons.

Next in the refuse disposal program will be construction of the Southwest Brooklyn Incinerator for which designs are 70% complete. The incinerator will be built partly on existing land and partly on fill beyond the shoreline at the old Ulmer Park site on Gravesend Bay. Contracts are expected to be advertised this spring. Provision will be made for a future one-slip marine transfer station at the site.

As soon as property transfer matters are straightened out, construction of a small marine transfer station at West 216 St. and the Harlem River will start, probably in the spring or summer of 1957.

And concurrently with this work, designs will proceed on the remaining items of the disposal program, beginning with replacement of the Hamilton Ave. Incinerator in Brooklyn and the new Harlem Incinerator at West 132 St. and the Hudson River. The latter will replace an old one at East 139 St.

Akron University Offers Engineer Master's Degree

Akron University's board of directors is expected to approve a graduate program leading to the master's degree in engineering. It will be the first time the university will be offering classes leading to an advanced degree in engineering.

The new program has been made possible by a $15,000 annual grant from Goodyear Aircraft Corp. and Goodyear Tire & Rubber Co.

Courses will be given in the late afternoons and evenings to accommodate qualified students in area industry who have undergraduate engineering degrees from accredited institutions.

TORQMATIC loaders quick shift in all gears

A SIMPLE FLICK OF THE WRIST and your operator can quick shift at full throttle in all three forward and all three reverse speeds.

A shovel loader with TORQMATIC DRIVE can "crowd" a load and get a full scoop every time. The TORQMATIC converter multiplies engine torque more than 300%.

TORQMATIC immediately adjusts to large load variations in loader work cycles without stalling the engine. It allows the engine to run at maximum output during bucket operations, providing maximum power for hydraulic pumps.

Take a tip from 55 manufacturers of 122 different kinds of road-building and construction equipment. Get the Allison TORQMATIC story.

Ask your equipment dealer, or write: Allison Division of General Motors, Box 894E, Indianapolis 6, Ind.

NO. 1 IN A SERIES ON SPEEDING AMERICA'S ROAD-BUILDING PROGRAM

GM TORQMATIC

Allison

TORQMATIC DRIVES

You save money o

The Gar Wood Dozecaster has the stamina required by Euclid's powerful TC-12. Rugged C-frame resists distortion . . ."deep-anchored" lugs can't bend or smash. Screw-type thrust arms simplify moldboard tilting.

Contractor Lynn Ankrom of Decatur, Illinois, shown above, has dug over 55,000 feet of ditch with his Buckeye 308 with "no major repairs and no downtime to speak of at all!" Dependable production like this is one of the reasons why "Buckeye" has become the most famous name in ditchers.

GAR WOOD I

PLANTS IN WAYNE AND YPS

ey on maintenance when you go Gar Wood-Buckeye

Today's construction proves low input just as important as high output. You can depend on both when you go Gar Wood-Buckeye! With Buckeye ditchers you put in far less time and money on maintenance for the high output these machines deliver. Here's why:

First, Buckeyes are designed to *stand up longer.* Truss-type frame and massive, tractor-type crawlers resist even the heaviest shocks. More anti-friction bearings, fewer moving parts, and oil-bath lubrication of gears add up to long unit life!

Buckeyes also save money by being *easier to maintain.* Unit construction permits servicing without disturbing other components. Major assemblies and parts are interchangeable, cost less, and are readily available. Contact your Gar Wood-Buckeye dealer for additional facts, or write direct to: Customer Service Dept., Gar Wood Industries, Inc., Wayne, Michigan.

Gar Wood - St. Paul dump bodies and hoists are easy to maintain. Servicing can be carried out by regular mechanics working with ordinary truck tools. "Strong-Arm" hoist design eliminates one-sided dumping strain.

In the Gar Wood 75B, heavy-duty, conical-hook double rollers eliminate pin strain and rocking under load. Massive crawlers are built to take it. Compact design of the machinery deck makes parts easily accessible for servicing.

D INDUSTRIES, INC. Wayne, Michigan

AND YPSILANTI, MICH.; FINDLAY, OHIO; MATTOON, Ill.; RICHMOND, CALIF.

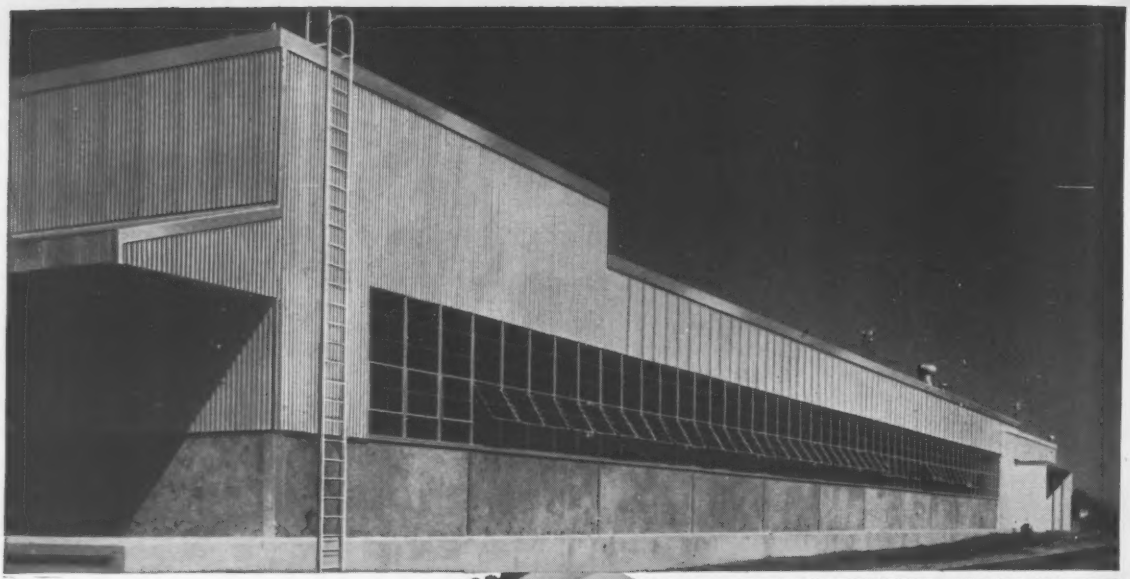

Siding,
Roofing
and Ceiling...



Industry builds better with

REYNOLDS *Lifetime* ALUMINUM

The building at the top, Century Mfg. Co. of Jackson, Miss., illustrates *Reynoside*...Reynolds *Lifetime* Aluminum ribbed-embossed siding. Shown in small silhouette is the 140,000 square foot roof of the Mack Trucks storage building, Allentown, Pa., covered with Reynolds *Lifetime* Aluminum Industrial Corrugated. And the photo at bottom right shows the *ReynoCoustic* ceiling of the Marion Electrical Instrument Company, Manchester, New Hampshire.

Together these installations demonstrate the many advantages of aluminum in industrial construction. As an exterior, it is rustproof, corrosion-resistant and heat-reflective...low in applied cost, low in maintenance. And in the form of *ReynoCoustic*, it is not only a highly efficient noise absorber...it can also provide a *superior* air-conditioning plenum. The Marion Company is enthusiastic about its draft-free distribution of clean, conditioned air to all points.

A complete installation service is available. For name of nearest franchised Jobber-Erector or Acoustical Applicator, call the Reynolds office listed under "Building Materials" in classified phone books of principal cities. Or write to Reynolds Metals Company, Building Products Division, 2046 S. Ninth Street, Louisville 1, Ky.

See "Circus Boy", Reynolds dramatic adventure series, Sundays, NBC-TV Network.

REYNOLDS ALUMINUM

BUILDING PRODUCTS

Ceiling Lighting System Comes as Packaged Unit

A new ceiling-wide lighting system for industrial and commercial use is supplied as a complete unit consisting of two parts—a ceiling-installed fluorescent grid system, and a suspended T-hanger aluminum framework, which holds plastic louver-diffuser panels.

Called "Strato-Lux, the fixture is claimed to provide glare-free, shadowless lighting by louver-diffusers, which give 25 deg crosswise and lengthwise shielding.

The grid system is available in sizes to fit any 8 x 8 ft or larger room, at a cost, not installed, between $2.15 and $3.15 a sq ft. Curtis Lighting, Inc., 6135 W. 65th St., Chicago 38, Ill.

Air Filter Extends Life Of Construction Equipment

A new heavy duty air filter that is said to permit uninterrupted operation of expensive construction equipment in dust laden atmospheres and at the same time extend the useful life of such equipment has been developed by Purolator Products, Inc.

According to the manufacturer, the filter is 99.5% efficient in protecting compressors and engines from wear.

Making use of a pair of heavy duty elements in series—each containing 4,800 sq in. of filtering area—the filter's positive action keeps abrasive particles of all sizes from delicate wear parts. The first-stage element has resulted in uninterrupted operations of up to 400 hours, with the only element servicing necessary being a daily air-washing and rapping for cleaning purposes, manufacturer's field tests show.

Available in 100, 200, 400, 600, and 900 cfm capacities, the air filters allow equipment to remain in operation during servicing of the first-stage element due to the efficiency of the second stage element, which provides positive filtration while element number one is air-washed and rapped for cleaning.

Housings of the unit are constructed of heavy gauge steel while the elements are made of convoluted, resin impregnated cellulose with ⅛ in. steel base and cover. An expanded metal protective body of ⅛ in. steel shields the element from damage during rough handling.

The unit itself is approximately 30 in. high and 19¼ in. in diameter, while each element is 10 in. in length and 10¼ in. in diameter. The entire unit weighs about 70 lb. Purolator Products, Inc., Rahway, N. J.

Anchor Nut Corrects Misalignment of Bolts

Accommodation of up to 8 deg angular misalignment in any direction between bolt holes and mounting surfaces is provided by a new, lightweight self-aligning anchor nut, the Kaylock F 1967.

The nut features a self-aligning nut element that "snaps to attention" for easy thread engagement when the bolt enters the nut. The ample float allows for tolerance build-up in the structure.

By eliminating the need for spotfacing or the use of tapered shims in many applications, both weight and construction costs are reduced, says the manufacturer. The self-aligning anchor nut is especially adaptable for aircraft structures such as tapered spars, tapered skins or die-fabricated parts having draft angles.

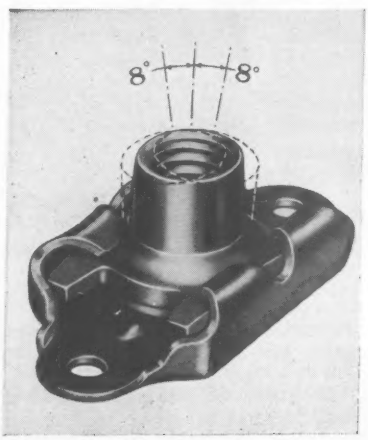

The nut is of all metal construction made in conformance with applicable requirements of military specifications, and is approved for use in temperatures up to 550 F.

Now available in ¼ in. tap size, the anchor nut soon will be available in additional sizes. Kaynar Co., 820 E. 16th, Los Angeles, Calif.

Koehring Excavator Takes A Two Cubic Yard Dipper

Newest addition to the Koehring line of excavators is the crawler-mounted 805—first shown at Chicago's 1957 Road Show—which can be used as a crane, a two-to-three cubic yard dragline, up to a 3¼ cu yd clamshell or a two cubic yard shovel.

Equipped with friction type steering brakes that are spring set and air power released, the manufacturer claims the rig can be turned within its own length when one crawler is completely locked. Main clutches have a mechanical power booster, cam action and automatic adjustment for heat expansion.

The excavator's bucket is crowded into the cut by a heavy roller chain. A high A-frame is standard equipment on all cranes using 75 ft booms or longer.

Six turntable and six hook rollers assure operating stability and evenly distribute the shovel's weight under any digging or lifting strain, say Koehring engineers. Turntable rollers, 12 in. in diameter and conical shaped to eliminate wear from scuffing, are machined from heat-treated high carbon steel drop forgings.

Antifriction bearings are used on the countershaft, horizontal swing and traction shaft, main drum shaft, and on all other shafts where speed is sufficiently high to justify antifriction bearings or where significant amounts of power can be saved from friction loss. Koehring Div of Koehring Co., 3026 W. Concordia, Milwaukee 16, Wis.

New Two-piece Heat Pump Cuts Costs, Space Needs

A 5 hp electric heat pump for year-round air conditioning of residential and small commercial buildings now is being produced in two units to save floor space and cut installation costs.

Called the Heat Pump Weathermaker, it employs outdoor air as a heat source. The outdoor air coil and the condenser are housed in a cabinet outside the building. The indoor unit, a

Peelle Pass Window



DINING ROOM SIDE

This unit consists of an integral hollow metal door and frame designed for quick, economical installation in schools, cafeterias, restaurants, ticket and baggage rooms, cloak rooms, gymnasium issue rooms, etc. Also with glass frame for hospital observation rooms and laboratories. Special extended sills furnished when specified.

See Sweet's Arch. File 33c/Pe, page 9.

THE PEELLE COMPANY
47 Stewart Ave., Brooklyn 37, N. Y.
ALSO RICHMOND FIREPROOF DOOR CO.
Richmond, Ind.

S-N

REDUCTION GEARS FOR HEAVY-DUTY EQUIPMENT

For use on Gasoline and Diesel engines . . . 7 models . . . cut-off clutch . . . 40 to 755 HP range . . . gear ratios 1:5.1 to 4:1 . . . up to 3300 lbs/ft engine torque
Write for complete information.

SNOW-NABSTEDT
Transmission Engineers
FOR HALF A CENTURY
"MAKERS OF JOE'S GEARS"
THE SNOW-NABSTEDT GEAR CORP., HAMDEN, CONN.

little larger than a room air conditioner, can be installed in such locations as the attic, closet, ceiling or basement.

The manufacturer claims that the pump will achieve greater efficiency over the normal range of heating and cooling operation and that costs will run 20% lower than other packaged air-source heat pumps. CARRIER CORP., SYRACUSE, N. Y.

Operations Speeded With Hydraulic Sweeper

A two-way sweeper, completely hydraulic in drive and controls, has been added to the line of tractor-mounted sweepers manufactured by M-B Corp.

For fast sweeping, the broom may be angled 30 deg to the right or left. The hydraulic swing ram swings the broom to any position within the 60 deg radius and is controlled from the driver's seat. According to the manufacturer, the operation is further speeded by unique swing arms that keep the sweeping path centered ahead of the tractor, regardless of the broom angle. A second control raises and lowers the broom by means of the hydraulic lift ram.

The large hydraulic pump may be front or rear mounted depending on tractor make. Both swing and lift hydraulic rams are three inch, double-acting.

It is engineered to fit most popular make tractors, using essentially the same underframe as the M-B mechanical sweepers. Adaptation of this sweeper head is also being made for mounting in tractor front-end loaders in place of the bucket with a quick mounting arrangement. M-B CORP., NEW HOLSTEIN, WIS.

Fork Attachments' Design Boosts Loader Versatility

Two new attachments—a pallet fork and a pulpwood clamp fork—have been designed to be interchanged with the bucket and increase versatility of the Ottawa Industrial Front-End Loader.

The pulpwood clamp fork is used to load, transport and stack logs, lumber or any material requiring a hold-down device. The hydraulically controlled clamp prevents loss of load when traveling over rough terrain, thus speeding handling operations. The clamp, which is actuated through a special valve control section added to the standard loader control valve, closes down to the forks and opens to 8 ft 6 in. (from tip of clamp to forks) providing ample clearance.

The pallet fork attachment is used for handling all palletized materials such as concrete blocks, brick, lumber, building material and pipe. Held by the same four pins which normally carry the bucket, it can be interchanged with the bucket in 15 minutes. The fork attachment is equipped with a rear guard to prevent the load from rolling over the back of the carriage, and has a tilt back angle of 18 deg, with a dump angle of 40 deg at full height.

Pallet forks and pulp wood clamp forks are available in 30 in., 36 in., 42 in., 48 in. and 54 in. lengths, and carriage widths of 48 in. and 64 in. OTTAWA STEEL DIV., L. A. YOUNG SPRING & WIRE CORP., OTTAWA, KAN.



Felker Concrete Cutter Has More Spindle Power

A series of new developments incorporated on Felker concrete cutters include a non-slip, high efficiency timing belt drive. This single belt, equipped with lugs that engage gear-like teeth on the pulleys, transmits power equal to 16 vee-type belts of "B" sections, the manufacturer claims. This extra torque and constant rpm mean longer blade life, with consequent increase in footage per blade.

A Vickers variable speed hydraulic power drive applies smooth power to the rear wheels and it is said to enable cutting on steep grades without slipping or coasting and gives a variable control of from 0 to 90 fpm. A reverse also is provided for backing up under power and simplifying working in tight areas.

Other improvements include longer adjustable handles by which a light-

Whether it's repair or replacement...

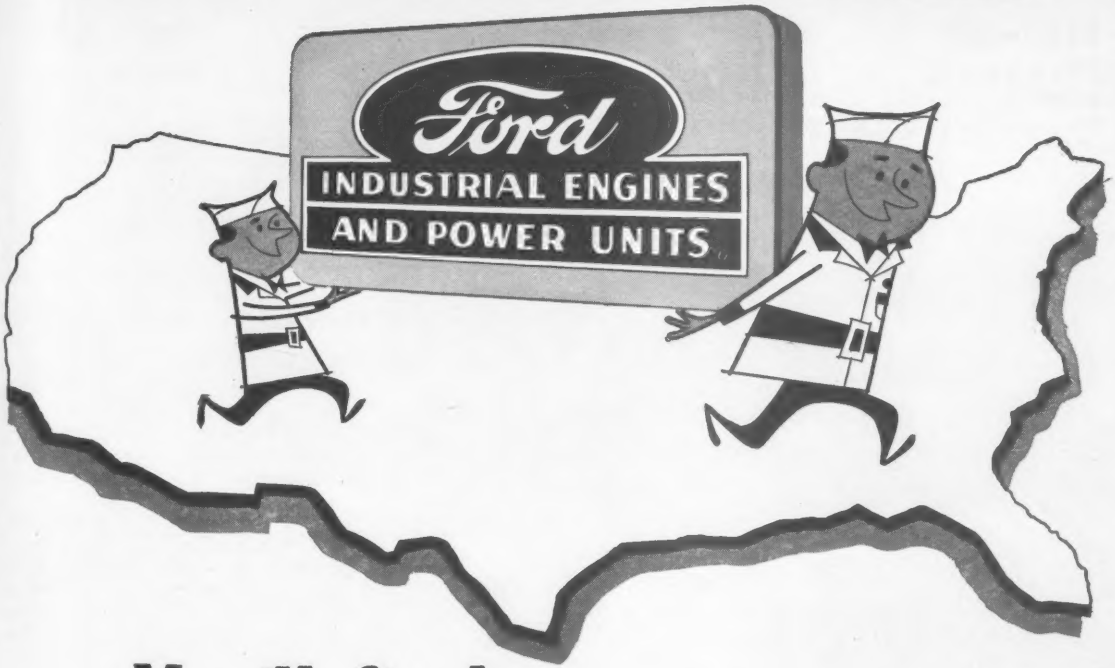

You'll find Ford Industrial Engine Service is available everywhere!

Know why so many industrial power users are swinging over to *Ford* power? One reason is service.

Ford power users *know* there's always a Ford Dealer nearby to give service when it's needed . . . to keep downtime at a minimum. And because Ford Dealers carry an inventory of the more commonly purchased engine parts, the Ford power user need never invest in a big parts inventory of his own.

Also, across the country, you'll find a network of newly established Ford Industrial Power Headquarters. Each is equipped to repower any type of equipment with dependable, low-cost Ford power.

It's the availability of service like this—wherever you are—that helps keep your operating costs *low*. If you are considering a new power unit or engine assembly—4-, 6- or 8-cylinder—see your Ford Industrial Products Dealer. He will be very happy to discuss your power requirements with you and make sure you get the one right power unit for *your* job. Write to the address below for further information.



Ford
INDUSTRIAL ENGINES
AND POWER UNITS

INDUSTRIAL ENGINE DEPARTMENT • FORD Division of FORD MOTOR COMPANY
P. O. Box 598, Dearborn, Michigan

YOUR JOB IS WELL-POWERED WHEN IT'S FORD-POWERED!

This season do more BIG work

. . . with construction's best-proved torque converter tractors
. . . backed by 17 years of on-the-job experience
. . . thousands of profit-tested production models

More efficient dozing—Matched engine-converter-transmission team lets operator choose speed range for each job as he starts . . . finish most jobs without further clutching or shifting (except for reverse). With full control at throttle, he can work safely and efficiently regardless of terrain.

Faster on tough scraper jobs—These Allis-Chalmers tractors multiply torque up to four and a half times . . . develop maximum drawbar pull when it's needed most . . . start the load smoothly regardless of material in the cut . . . automatically accelerate to the highest speed that conditions permit.

Nothing like 'em on big loading jobs—The 3-yard HD-16G and 4-yard HD-21G tractor shovels are tough, mobile, flexible enough to pay big dividends on many projects. Operators can crowd surely and steadily . . . without stalling, shifting gears or losing control of the bucket because of slow engine speed

per man-hour . . . at lower cost

No construction equipment dealer in your area knows torque converter tractors as well as your Allis-Chalmers dealer. See him . . . and get the benefits of 17 years' experience working for you. Allis-Chalmers, Construction Machinery Division, Milwaukee 1, Wisconsin.

Longer life for big equipment—Hydraulic torque converter cushioning reduces shock and vibration on the power train, the entire tractor and its auxiliary equipment—mounted or drawn. That means less downtime, more production time . . . better profit protection on any job!

ALLIS-CHALMERS

Engineering in Action

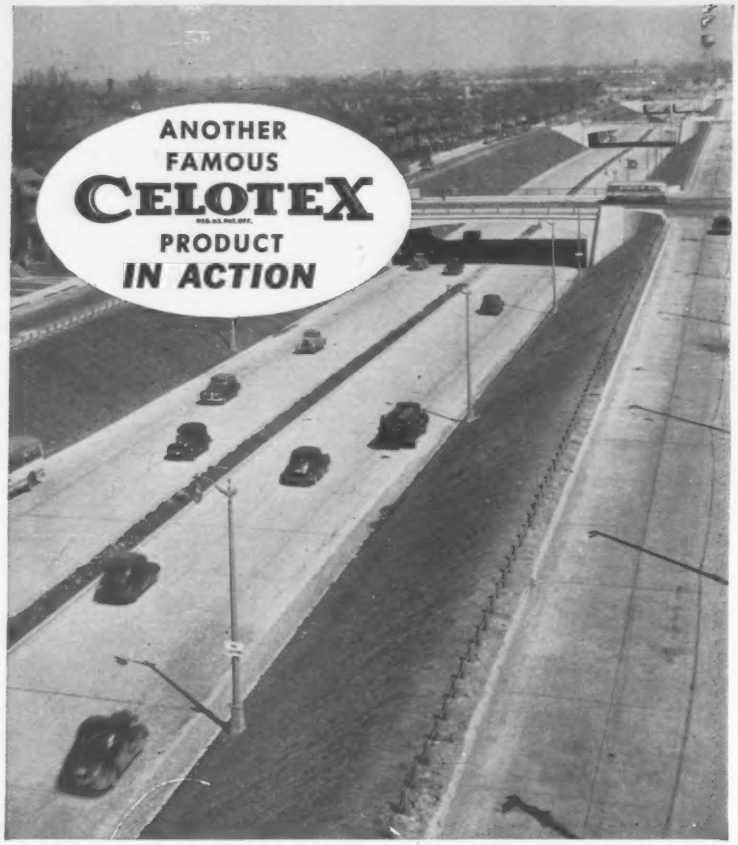

Detroit Express Highway, typical use of Flexcell Joint Filler "wherever concrete meets concrete"

BEST LOW COST PERFORMANCE!



Cleveland Municipal Airport, where 2½ million people landed or took off last year on runways protected by Flexcell Joint Filler.

Rickenbacker Causeway between Miami, Florida, and Biscayne Key. Flexcell Joint Filler contributes to smooth riding and easy maintenance.

FLEXCELL

REG. U.S. PAT. OFF.

EXPANSION JOINT FILLER

1st. Choice Across America!

Men meeting today's road-building challenge know an inch can be a chasm in concrete highway construction. They like the better combination of performance characteristics you get with Flexcell Joint Filler. You'll like its low installation and maintenance cost, too.

COMPRESSIBLE • NON-EXTRUDING • RESILIENT

Flexcell Joint Filler bonds firmly to concrete, compresses without extruding. Re-expands to keep joints filled, preventing intrusion of dirt and stones. Uniform asphalt impregnation, 35% by weight minimum. Unaffected by temperature extremes. Tough, rigid, light in weight. Easy to fabricate and install. Delivered to your specifications.

Write for Complete Data Today • No Obligation

THE CELOTEX CORPORATION

120 South La Salle Street • Chicago 3, Illinois

weight man can balance the unit on rear wheels for maneuvering; a pivoted engine mount for adjusting belt tension, which eliminates realignment problems; and a removable frame insert for easing access to spindle pulley for belt replacement. FELKER MANUFACTURING CO., 1128 BORDER AVE., TORRANCE, CALIF.

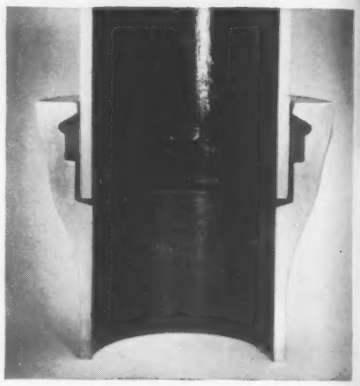

Cast Iron Pipe Joint Approved for 350 psi

Fast, simple assembly is claimed for new Clow cast iron pipe joint, which has been approved by Underwriters Laboratories for 350 psi working pressure.

The rubber seal joint uses only a molded rubber gasket for its seal—no follower ring or bolts are required. It is called an all-weather joint that makes on tight under all trench or weather conditions so that speed of laying can be stepped up. JAMES B. CLOW & SONS, INC., 201-299 N. TALMAN AVE., CHICAGO 80, ILL.

High Speed Transmission Helps to Lessen Fatigue

A chain saw said to feature faster cutting and less operator fatigue is made possible by a high-speed 2 to 1 gear-driven transmission and a 6 hp chain saw engine.

The saw is known as the Big Six and is available with bars and chains of from 19 to 42 in. long for one or two-man operation. It has an all position diaphragm carburetor, a special armored nose guard, a positive chain tightener and a fully automatic clutch.

Refueling is simplified by easily accessible oversized fuel openings. The starter has a nylon cord and an emergency starting drum. A convenient full throttle button also aids starting. An accessory tool kit, including a sprocket puller, is included. LANCASTER PUMP & MANUFACTURING CO., INC., MANHEIM ROAD, LANCASTER, PA.

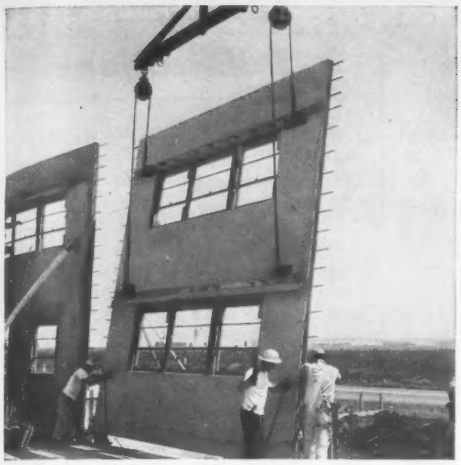

PANEL with large window areas

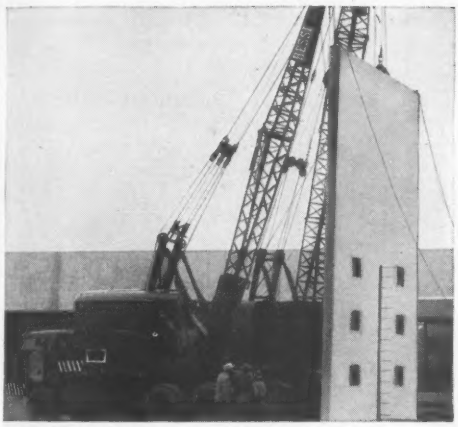

57 TON SLAB being positioned

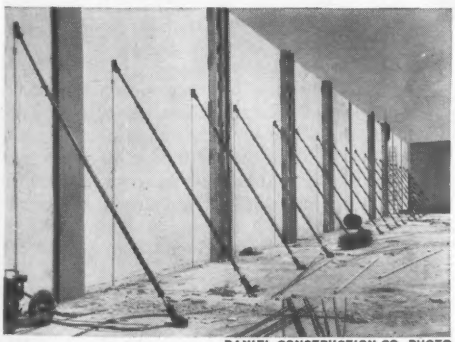

DANIEL CONSTRUCTION CO. PHOTO

ADJUSTABLE BRACES used for quick and easy alignment of panels

WAREHOUSE DANIEL CONSTRUCTION CO. PHOTO

Tilt-Up Costs Go Down

...with SUPERIOR "Pick-Up" Inserts, Brace Anchors, and Braces

When an outstanding Tilt-Up job rates an article in a construction publication you can be almost certain that SUPERIOR products were used. The reason is simple. SUPERIOR, as the pioneer in this field, developed designs that were thoroughly tested both in the laboratory and the field to assure safety with economical prices and low application costs.

These "Pick-Up" Inserts, Brace Anchors, and Adjustable Braces have been used and proven on literally thousands of projects, not a few of which were unique in design. With a background of such experience, the recommendation of our engineers as to location and types of Inserts and Anchors is reliable and valuable.

Avoid expensive crane delays, be assured of safety, and reduce your overall costs with these SUPERIOR products.

For further details request a copy of Bulletin TU-3

SUPERIOR
CONCRETE ACCESSORIES, INC.

9301 King St. Franklin Park, Ill. (A Suburb of Chicago)

New York Office
1775 Broadway
New York 19, N. Y.

Pacific Coast Plant
2100 Williams St.
San Leandro, Calif.

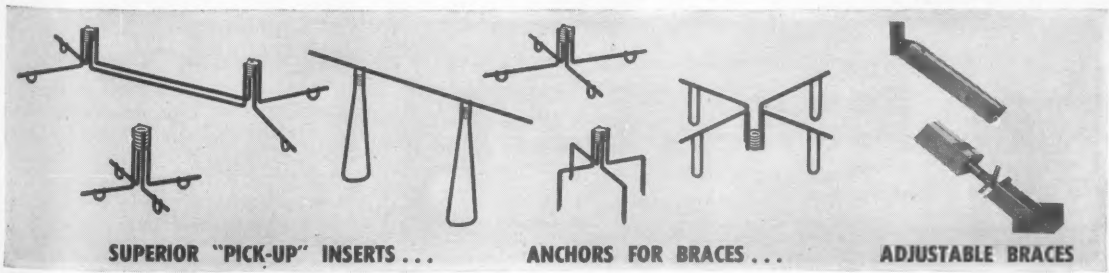

SUPERIOR "PICK-UP" INSERTS . . . **ANCHORS FOR BRACES . . .** **ADJUSTABLE BRACES**

SONOVOIDS®

reduce the cost of slab floor construction!

Mystic Seaport Accessions Bldg., Mystic, Conn. Lovello & Naccarato, Contractors. Architect: Francis D. Rogers, Rogers & Butler, NYC and O. E. Liebig, New London. Photo by Martel.

SONOVOID®

FIBRE TUBES

for voids in concrete construction

Use low-cost SONOVOIDS to save money and materials in the construction of concrete slab floors!

These easily-handled fibre tubes are used to form voids in the slab to reduce weight, save concrete and reinforcing steel without impairing structural strength.

SONOVOID Fibre Tubes eliminate dead weight by displacing low-working concrete at the neutral axis.

Specifically developed for use in bridge decks, wall floor, roof and lift slabs . . . and in concrete piles . . . SONOVOIDS can be ordered in required lengths or sawed to fit on the job.

Available in sizes 2.25″ to 36.9″ O.D. up to 50′ long. End closures available.

For complete technical information and prices, write

sonoco — SERVES THE WORLD — PAPER CARRIERS — REG. U.S. PAT. OFF.

SONOCO PRODUCTS COMPANY

CONSTRUCTION PRODUCTS DIVISION

HARTSVILLE, S. C.

LOS ANGELES, CAL. 5955 SOUTH WESTERN AVE.

MONTCLAIR, N. J. 14 SOUTH PARK STREET

AKRON, IND. • LONGVIEW, TEXAS • BRANTFORD, ONT. • MEXICO, D. F.

Publications

Air compressors—A new bulletin entitled "No Contractor Can Afford To Be Without Self-Propelled Air Compressors" is offered by Schramm, Inc. This comprehensive folder describes and illustrates the versatility of Schramm's Pneumatractor, a combination 125 cfm air compressor and wheel tractor, which can be converted from one service to the other by a button on the instrument panel. Photographs show 18 ways contractors can use the unit, such as power shoveling, breaking out concrete, trenching, grading and rock drilling. Detailed specifications are given for both the standard and the heavy pneumatractor, including air delivery, bore and stroke, horsepower, dimensions and weight. SCHRAMM, INC., 900 E. VIRGINIA AVE., WEST CHESTER, PA.

Drilling accessories—Mobile Drilling, Inc., has combined all its descriptive literature in a catalog-packet for the convenience of contractors, aggregate prospectors, state and government highway departments and others in the soils engineering field. Most of the catalog is devoted to an extensive line of earth drilling accessories including augers, core barrels, drilling heads and bits, winches and other equipment. Pockets on the inside front and back covers carry additional literature on the company's complete line of mobile rotary drilling rigs, as well as the story of Mobile's soil and foundation engineering service. MOBILE DRILLING, INC., DEPT. 19, 960 N. PENNSYLVANIA ST., INDIANAPOLIS 4, IND.

Aluminum highway products—A brochure giving information on the complete line of Kaiser aluminum highway products now is available. The booklet, "Kaiser Aluminum Highway Products", gives detailed design, construction and installation data for bridge railings, extruded highway signs, sign blanks and accessories that are available from Kaiser. Photographs, scale drawings and handy tables giving data on dimensions, alloys and weights facilitate use of the brochure. KAISER ALUMINUM & CHEMICAL SALES, INC., HIGHWAY PRODUCTS SALES OFFICE, 919 N. MICHIGAN AVE., CHICAGO 11, ILL.

Curing compounds—A new brochure gives complete information on the different types of concrete curing compounds that are manufactured by Hunt Process Corp. It describes how and where to use the compounds and recommends procedures to be followed. HUNT PROCESS CORP. SOUTHERN, P. O. Box 420, RIDGELAND, MISS.

(*Publications continued on p. 81*)

. . . Publications

Asphalt plants—A 16 page bulletin has been released describing the R-M line of semi-portable asphalt batch plants from 2,000 to 6,000 lb capacity. Also published is a 4 page bulletin on the TM Mobile Mixer, which is completely self contained on a single trailer frame. Especially designed for on-the-job mixing in rural areas and out-of-the-way locations, the new TM mixer in capacities up to 2,000 lb can be erected in less than 30 minutes and is ready to produce asphalt mix in a few hours, according to the manufacturer. Shown in photos and thoroughly discussed in the text are essential parts of both plants. Specifications and accessories such as heating units, fuel-pump assembly and dust collectors are described. ROAD MACHINERY DIV., STANDARD STEEL CORP., 5001 S. BOYLE AVE., LOS ANGELES 58, CALIF.

Bituminous paver—A bulletin describing a new bituminous paver has been issued. It describes how—by using the new Vibromatic principle of operation—this paver has met with outstanding success on different types of paving jobs throughout the country. The bulletin (No. 655-2) also contains specifications, dimension drawings and numerous photographs, both of the on-the-job and of the machine-feature varieties. PIONEER ENGINEERING, DIV. OF POOR & CO., INC., 3200 COMO AVE., MINNEAPOLIS 14, MINN.

Motor graders—A 16 page catalog (MS-1148) on Grader Model-45 is available. Photographs, sketches and other instructive illustrations aid readers visualize details of the motor scraper's mechanical features and components. On-the-job photographs assist in telling the performance, operating, comfort and service simplicity of the "45". The catalog also has information on attachments and accessories that add to the versatility of the unit, and includes its specifications. ALLIS-CHALMERS MANUFACTURING CO., CONSTRUCTION MACHINERY DIV., MILWAUKEE, WIS.

Transit-mixer—The new truck engine drive, Transcrete, is fully described in a bulletin now available. With the aid of illustrations, the bulletin covers the power connector and drum drive unit as well as advantages of the TED Transcrete. CONSTRUCTION MACHINERY CO., WATERLOO, IOWA.

Scalping Plants—Portable intermediate scalping plants that provide intermediate crushing and scalp off unwanted fines and dirt are illustrated and described in an 8-page bulletin. IOWA MFG. CO., CEDAR RAPIDS, IOWA.

LOW-COST SONOTUBES® form support columns for highway bridges!

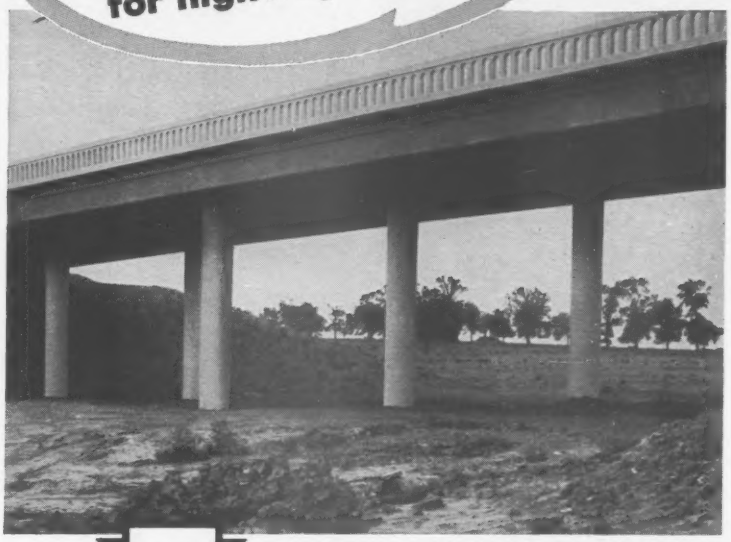

Highway Bridge in Topeka, Kansas. Designed by Bridge Dept., Kansas State Hwy. Comm. J. W. Frisbee, Kansas City, Mo., contractor

SONOTUBE®

FIBRE FORMS

for round columns of concrete

The supporting round concrete columns for the bridge structures built on the relocation of U. S. Hwys. 40 and 24, west of Topeka, Kansas, were formed by low-cost SONOTUBES. The bridge decks contain hollows formed by low-cost SONOVOIDS.

Columns like these cost less to construct because SONOTUBE Fibre Forms need only minimum bracing, take less time to erect and require fewer men for the job. These low-cost, lightweight, easily handled fibre forms can be sawed to size at the site or ordered in specified lengths.

Save time, money and labor . . . use SONOTUBES on your next job! Sizes from 2" to 48" I.D. up to 48' long. Order Sonoco's patented "A-Coated" SONOTUBES for finished columns; wax-coated also available.

sonoco SERVES THE WORLD PAPER CARRIERS REG. U.S. PAT. OFF.

SONOCO PRODUCTS COMPANY

CONSTRUCTION PRODUCTS DIVISION

HARTSVILLE, S. C.

LOS ANGELES, CAL. 5955 SOUTH WESTERN AVE.

MONTCLAIR, N. J. 14 SOUTH PARK STREET

AKRON, IND. • LONGVIEW, TEXAS • BRANTFORD, ONT. • MEXICO, D. F.

...even as now--

STANG WELLPOINTS

will help bridge the

Nation's rivers in the

National Highway Program!

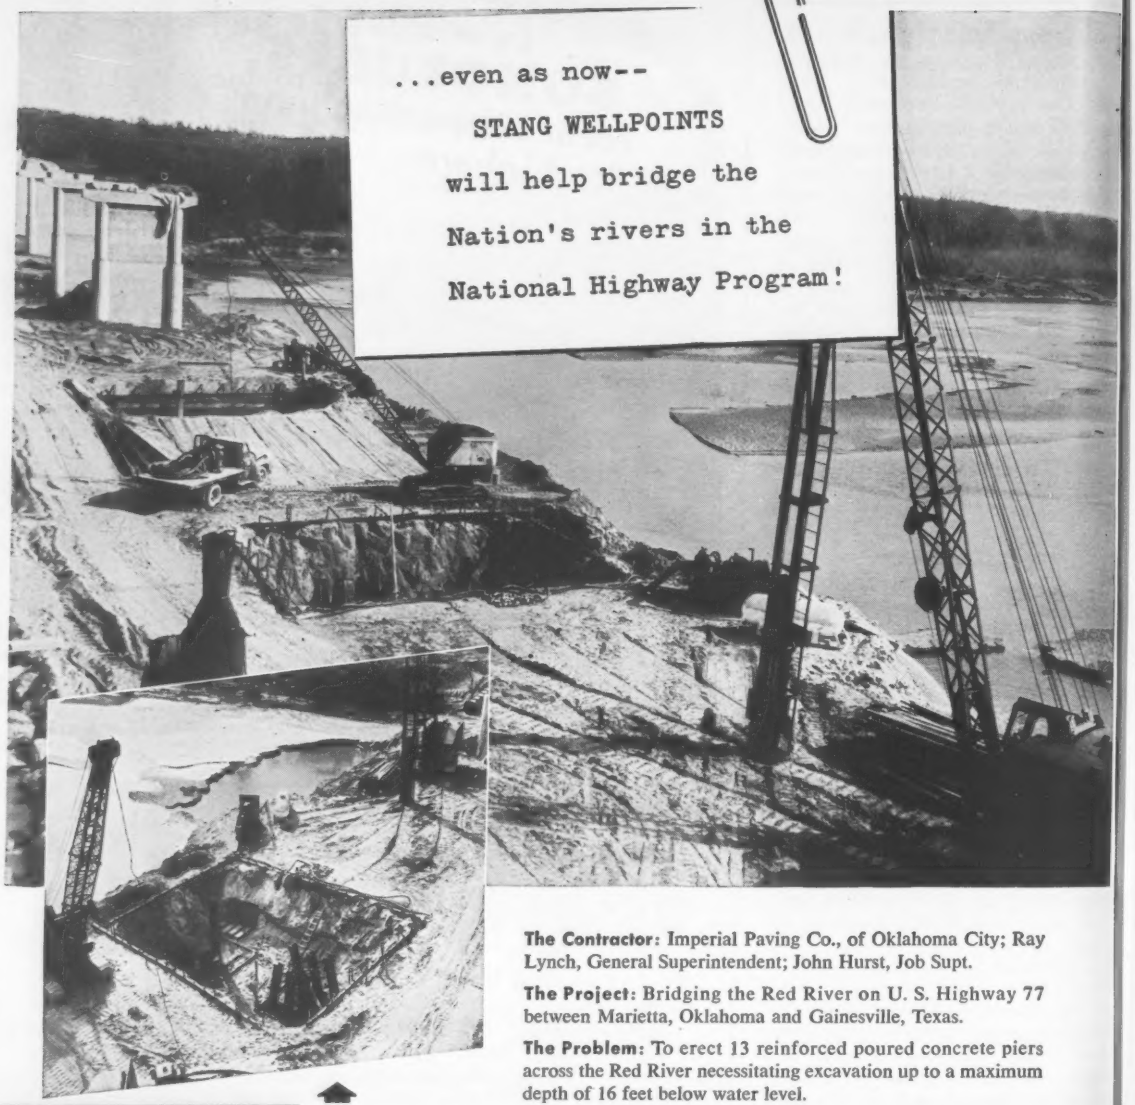

GENERAL PUMPING including High Pressure Jet Pumps, Large Capacity Sump Pumps (vertical or horizontal), Hydraulicking and Sluicing Systems and Sprinkler Irrigation Equipment.

Write for bulletin 100

The Red River bridge is a joint Texas-Oklahoma project under the direction of the Texas Highway Department, Mr. John G. Simpson, resident engineer.

The Contractor: Imperial Paving Co., of Oklahoma City; Ray Lynch, General Superintendent; John Hurst, Job Supt.

The Project: Bridging the Red River on U. S. Highway 77 between Marietta, Oklahoma and Gainesville, Texas.

The Problem: To erect 13 reinforced poured concrete piers across the Red River necessitating excavation up to a maximum depth of 16 feet below water level.

The Solution: Installing a Stang Wellpoint system progressively around each pier location on a previously constructed earthen dyke thus lowering the ground water level to the required depth.

Result: A completely dry working area in a water-saturated riverbed making possible a *time-saving and profitable job!*

Call on STANG engineers for experienced services and special equipment to solve your water handling problems—any size, any type, *anywhere!* STANG engineers are on call in your area for consultation day or night.

JOHN W. STANG CORPORATION

Putting water in its place

571 ...anyplace!

Engineers and Manufacturers of Dewatering Equipment, Wellpoint and Pumping Systems
Dewatering Planning—Equipment—Service

BELL, CALIFORNIA	OMAHA, NEBRASKA	TACOMA, WASHINGTON	TULSA, OKLAHOMA
8221 Atlantic Avenue	2123 South 56th Street	2339 Lincoln Avenue	4026 South Urbana Street
Telephone: LUdlow 2-7421	Telephone: Walnut 7796	Telephone: Broadway 4362	Telephone: Riverside 2-6929

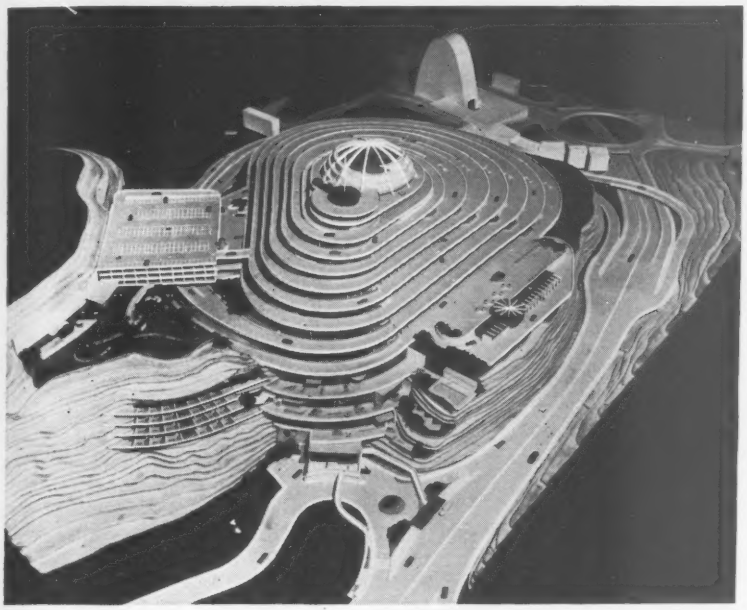

Spiral Market To Wind Around Hill

A $25 million shopping and business center now under construction in Caracas, Venezuela, will wind round and round a 25 acre hilltop overlooking the city. Called the "Helicoid," the project will feature a spiral auto ramp, ascending on a 2½% grade, on which motorists can drive to the various levels. Parking space will be provided in front of the shops. For pedestrians there will be elevators, ramps and escalators.

The development will incorporate 320 small stores, a hotel, swimming pool, garages, business offices and an exposition hall. Completion is scheduled for 1960.

Two Venezuelan companies, Inversiones Planificadas Investment Co. and the IVECA Construction Firm, are financing the project and will operate it cooperatively. IVECA is also the contractor on the job, jointly with INACA, another Venezuelan builder. The project was designed by Venezuelan architect Jorge Romero Gutierrez.

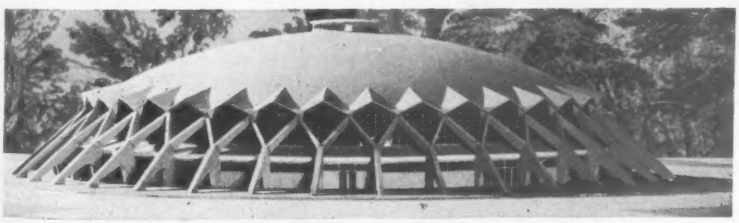

Concrete Dome Will Be Partly Precast

The thin-shell concrete roof of a circular sports arena to be built in Rome will serve in part as its own formwork. Instead of being cast monolithically, the spherical shell will be precast and erected in sections, then bound together as a unit by a final layer of concrete on the assembled parts.

Designed by Pier Luigi Nervi, engineer, and A. Vitellozzi, architect, the building will be used for the fencing and boxing matches of the 1960 Olympics. It will have an interior diameter of 194 ft and a seating capacity of 5,000.

Both the vertical loads and outward thrusts of the shell will be borne by 36 concrete buttress frames spaced around the perimeter. The outer leg of the frames will extend the overall diameter of the structure to 256 ft.

Builders of the project are Nervi & Bartoli, Rome.

FOUNDATIONS
UNDERPINNING
PILING

Spencer White & Prentis

SHORING
COFFERDAMS
SPECIAL SERVICES

CATALOGUE ON REQUEST

10 E 40th ST., NEW YORK 16,
DETROIT: 2033 PARK AVE.
CHICAGO: 228 NORTH LaSALLE ST.
WASHINGTON, D. C.: TOWER BLDG.
IN CANADA: 700 BAY ST., TORONTO
2052 ST. CATHERINE ST. WEST, MONTREAL

UMECO 5¾" SURVEY TRANSIT
Model 575

PRECISE • RUGGED • RELIABLE

Fully Guaranteed

Complete line of transits, levels, compasses, plainmeters. Folder on request.

UMECO OPTICAL DIVISION
465 California San Francisco, Calif.

Exclusive Western Distributor:
A. Lietz Company
840 Post, San Francisco 1224 S. Hope, Los Angeles

ALBADURE*... the steel tape with lasting legibility

Here is a steel tape that stays clear and legible long after markings on other tapes have worn off.

An amazingly tough plastic coating on both sides of the line protects the white background, the graduations and numbers on ALBADURE tapes, giving their surfaces tremendous resistance to abrasion and corrosion. To quote a State surveying party report, "If ALBADURE stood up in this tough mud and sand, it'll stand up anywhere." Available in all standard lengths, widths and graduations, in cases and on reels.

PHOENIX WYTEFACE®... the woven tape that outlasts others 3-1

PHOENIX WYTEFACE (non-metallic) Woven Tapes made from extra strong synthetic yarns, are harder wearing, with higher tensile strength and dimensional stability than ordinary woven tapes. A special plastic coating on both sides protects the line against hard use, water, stones or brush.

The end of the line is enormously strengthened by a lamination of Flexi-Foam, a spongy plastic-rubber. No stitches or hinge point to weaken the line.

A Highway Engineer reported of the non-metallic PHOENIX WYTEFACE, "It has at least three times the life of an ordinary metallic tape." *Ask Your K & E Dealer!*

*Trade Mark

89 YEARS OF LEADERSHIP In equipment and materials for drafting, surveying, reproduction and optical tooling . . . in slide rules and measuring tapes.

KEUFFEL & ESSER CO.

NEW YORK • HOBOKEN, N. J. • Detroit • Chicago • St. Louis • Dallas • San Francisco • Los Angeles • Seattle • Montreal

Research

Chicago Tells All

Waterworks chief reports on development

The February issue of PURE WATER, Chicago Bureau of Water's regular monthly publication, contains a revealing glimpse of the great amount of practical research under way at the city's 320 mgd South District Filtration Plant. Purification Engineer John R. Baylis has written a year-end report that comments on many modifications that are likely to become standard practice in filter plants. Here is what one of the country's leading filtration engineers has to say. . . .

On chlorinators: To obtain information on different makes, one rotometer type of chlorinator without trays or bell jar, of small capacity (Fischer & Porter), was installed more than a year ago. This machine has given good service up to the present time. It has few working parts and the maintenance costs should be very much less than for the old machines now in use.

On liquid alum measurement: In 1956, a change was made from rotometers for measuring the flow of liquid aluminum sulfate to rotodips. Trouble developed by material occasionally crystallizing in the rotometers to cause inaccuracy of such meters. The rotodips are more open than rotometers and any tendency for clogging can be washed away very easily.

On butterfly valves: Previous reports have mentioned the wear on backwash gate valves. A few of these that were leaking badly have been repaired by inserting a rubber seat butterfly valve inside the body of the gate valve. This appeared to be a cheap method of repairing the gate valves. Now the price of rubber seat butterfly valves has dropped to the extent that a new valve can be purchased for the same cost of the insert valve. Several leaky gate valves on the surface wash system were replaced with rubber seat butterfly valves. In 1954 one filter was equipped with a rubber seat butterfly valve on the effluent line that acts both for cut-off and rate control. It continues to give satisfactory control of the filtration rate.

On filter beds: There is movement of the fine layers of gravel in some of the filters, which causes mounding and some sand leakage. In one filter, 6 in. of the finer gravel was removed and replaced with a granular material produced from molten fluedust from a power plant. It has a specific gravity

of 3.0, compared to 2.55 for the original fine gravel. The hope is that this will be more difficult to move during backwashing.

On sand and gravel handling: For more than a year we have been developing a method of removing sand and fine gravel from filters with a sand pump. It works well enough to be regarded as a satisfactory method. Further use should show that it is the most economical method. Sand has been returned to filter beds by pumping.

On magnetic flow meters: A 20 in. magnetic flow meter was installed on a filter effluent line in advance of the venturi meter. It is giving accurate measurement of water flow.

On sediment scrapers: On one of the scraper units, every other wooden flight was removed from the chain, leaving 20 ft between flights. On another unit, two flights were removed leaving 30 ft between flights. Both arrangements have removed sediment in a satisfactory manner. Scraper units for the 960 mgd Central District Filtration Plant (now under construction) may have flights at least 20 ft apart.

On chemical handling: Equipment for handling activated carbon in the slurry form is now nearly completed. It is anticipated that 95% of the carbon will be handled in this form. Delivery of liquid alum has been so regular there have not been many occasions requiring return to dry feed. Success in handling liquid alum prompted handling ferrous sulfate in the liquid form. Conversion of dry bins to liquid tanks is under way.

Film to Slow Evaporation Is Slated for More Tests

The U. S. Bureau of Reclamation is starting experiments this spring in a study of how to apply and maintain a layer of chemicals to reduce water loss through evaporation.

Hexadecanol, or cetyl alcohol, is the substance to be used (ENR Mar. 21, p. 90). The nearly invisible chemical will be applied in a layer about a millionth of an inch thick on the 97 acre surface of Rattlesnake Reservoir, 12 miles west of Loveland, Colo. The tests will be concerned chiefly with evaluating methods of spreading the chemical across the reservoir surface to hold down water loss amounting to 4 ft of depth.

Tests on a small scale last year near Oklahoma City showed little or no effect on fishlife, taste or odor of the water, tauna or water organisms from the use of Hexadecanol, according to R. J. Walter, Bureau regional director at Denver.

The shock of bucket digging into dirt never reaches the engine, because the National Torque Converter absorbs vibration and shock. Converter sizes: 100 to 1000 hp.

When will Torque Converters be standard equipment on big machinery?

It's already started. Look at the picture and you'll see why. A brief instant ago that power-shovel bucket was carrying zero load. Then it rammed into the bank. A second later the load shot up to several tons. Yet the engine is in no danger of stalling. It won't even labor. In that second, the National Torque Converter automatically adjusted the speed of the bucket—down—and its power—up. The engine hardly felt it.

A National Torque Converter saves a little time on every work-cycle of the machine, because it lets the machine work at its top capacity for the entire cycle. Over the day it's a lot of time and a lot of work. If you operate heavy-duty machinery from 100 to 1000 horsepower, it can make a lot of difference in your profits too.

How big a difference? Put our 20 years of experience with high-power fluid transmissions to work finding out for you. Our engineers will investigate your power-transmission problems and give you the answers. Write: The National Supply Company, Two Gateway Center, Pittsburgh 22, Pennsylvania.

THE NATIONAL SUPPLY COMPANY

INDUSTRIAL PRODUCTS DIVISION

Two Gateway Center, Pittsburgh 22, Pa.

Pace-setters in the progress of industrial power transmission

Highway Costs Rising-

*America's Grand Plan needs the economy o*Mo

The Federal Highway program is barely under way. Yet, construction costs already have gone up 4%, according to official figures.

But here's good news! Savings from durable Asphalt construction . . . savings from low, quick and easy maintenance . . . can go a long way toward keeping the costs of *your* much-needed new roads within your ability to pay.

Experts say that *3 billion dollars* in original costs alone can be saved on the Interstate System with modern Asphalt pavement. And a substantial part can be realized by *your* state . . . your community.

SMOOTH-RIDING, SAFE HIGHWAYS ARE YOURS, TOO

Yes, at lower cost to the taxpayer, Asphalt pavement provides more, better and wider highway. With smooth-riding, tough, resilient, skid-resistant surfaces. Glare absorbent pavement that is easier on the eyes. Lane markings that are easier to see day and night.

No wonder that four out of five miles of paved roads in the U. S. are surfaced with Asphalt!

So, specify Asphalt construction now! You won't have to worry about getting Asphalt, either . . . when the time comes. For, unlike some other construction materials, **Asphalt** *is in plentiful supply.*

ng-Already UP 4%!

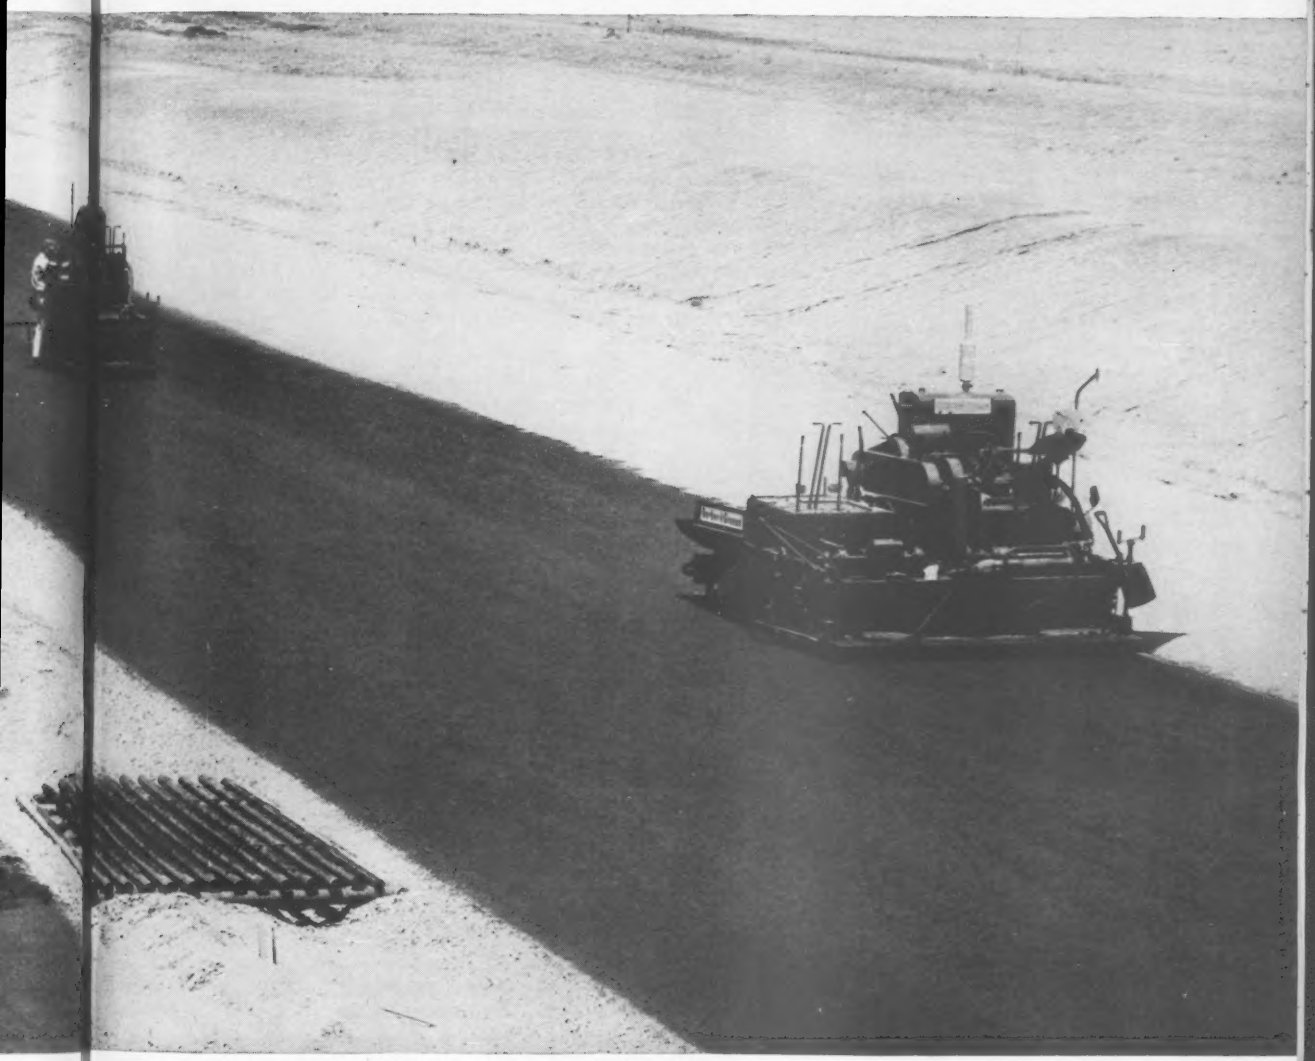

ny of Modern ASPHALT construction

MODERN ASPHALT CONSTRUCTION is a triumph of road-building science. With built-up layers that spread the load . . . hug the earth . . . absorb shock and pounding without cracking. Layers topped off with smooth-riding yet textured skid-resistant modern Asphalt pavement. Economy, comfort and safety are built in *to last* . . . with this modern durable Asphalt construction. Built in to save you tax-dollars.

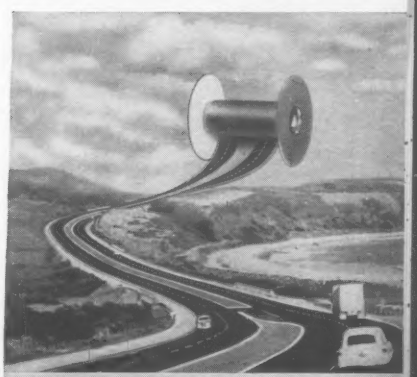

Ribbons of velvet smoothness . . .
MODERN **ASPHALT** HIGHWAYS

THE ASPHALT INSTITUTE, *Asphalt Institute Building, College Park, Maryland*

From our
50th Anniversary Album

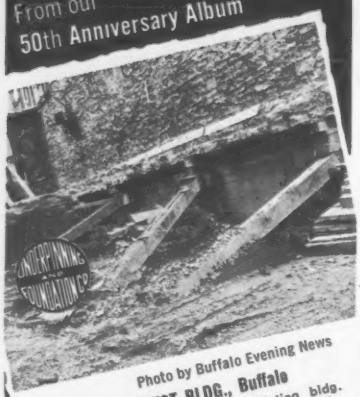

Photo by Buffalo Evening News

MARINE TRUST BLDG., Buffalo

Braced and underpinned 7 story printing bldg. by jacking 86 hercules pipe piles, prior to installation of Marine Trust Bldg. deep pile foundations. John W. Cowper Co., Inc., General Contractors.

Service
Experience

✓PILING ✓FOUNDATIONS
✓SHORING ✓UNDERPINNING
✓CONSULTATION & DESIGN

UNDERPINNING & FOUNDATION CO., INC.
155 E. 44th St., New York 17, N. Y.
General Contractors for 50 Years
Inquiries are invited—no obligation.

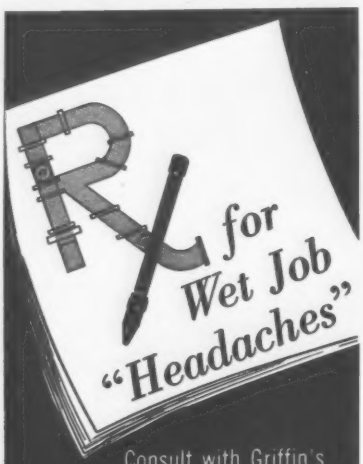

Consult with Griffin's engineers.

Ground water analysis and pre-bid estimate —no obligation.

GRIFFIN
WELLPOINT CORP.
881 East 141st Street New York 54, N. Y.

Cooling Water Heats

Heat pump at Dalles Dam uses generator coolant

A heat pump installation using generator cooling water as a heat source will provide year round temperature control in the powerhouse at The Dalles Dam on the Columbia River. Selection of the heat pump system, according to the Corps of Engineers, was based on successful results achieved by a sister installation, the first of its type, in operation for over a year at McNary Dam upstream.

On the heating cycle, river water will be used first to cool 14 80,000 kw generators at the dam. Heat that the water so picks up will be given up to refrigerant in the evaporation side of a refrigeration compressor. In turn, the heat will be transferred to condenser water which circulates to air handling units at 105 F.

On the cooling side, water flow is reversed. River water circulates to the condenser where it picks up heat from the refrigerant. Chilled water for the air handling units circulates to the evaporator side.

Principal components of the heat pump system will be three 150 hp refrigeration units supplied by The Trane Co., La Crosse, Wis., and capable of 500 tons of refrigeration. These feature centrifugal compressors equipped with variable inlet vanes which tend to flatten efficiency curves.

Year around design temperature for the generator room is 50 F, and for the remainder of The Dalles powerhouse 70 F.

An anticipator control will automatically start and stop the refrigeration units. An operator determines how many centrifugals to run.

SPRAYED AREA gleams white in contrast to vegetation-loaded unsprayed section.

Levee Riprap Is Kept Free of Growth

Levee riprap is kept free of vegetation —with its attendant "sink holes" from rodent burrows and undermining by roots of large growth—through use of a penetrating weed killer called Telvar.

The cleaner is being used on a stretch of levee on the Missouri River between Kansas City and North Kansas City. Built by the Corps of Engineers, the nine miles of levee are of standard construction, formed to a 2:1 slope with a 2½ ft deep layer of limestone riprap.

Vegetation control was started by the North Kansas City Levee Board on the levee of one bank of the river before any growth could start. The chemical was sprayed on and followed by a touch-up of missed spots the second season. The result: Growth is almost non-existent. The opposite bank, untreated, holds vegetation standing over 6 ft high.

An older levee, heavily overgrown with willows and some cottonwoods, also was sprayed and the growth substantially reduced. Spot treatment has prevented regrowth.

Frank A. Keckler is superintendent of the levee board. Telvar is a product of E. I. du Pont de Nemours & Co., Inc.

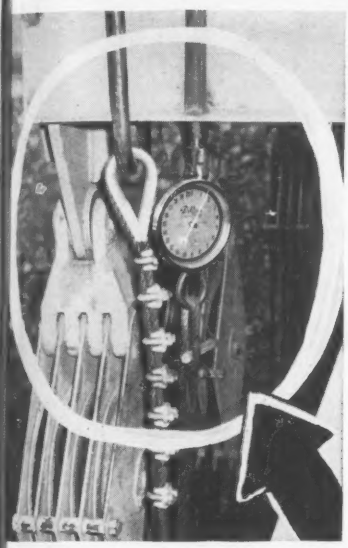

Dynamometer . . .

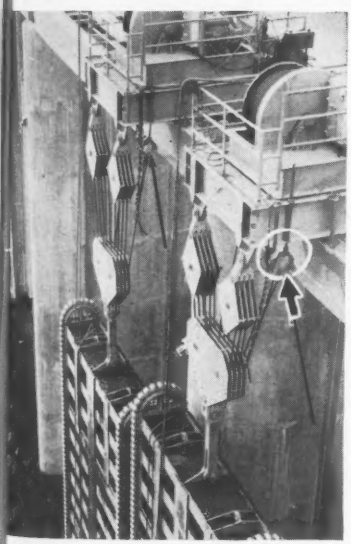

. . . Protects Sluice Gates

The heavyweight dynamometers shown provide overload protection to the beams supporting sluice gate hoists at Chief Joseph Dam on the Columbia River in Washington. Danger point for each hoist is 100 tons, but 16 part line allows 20,000 lb capacity dynamometer to be used (danger point at 11,250 lb).

Gages used at Chief Joseph were manufactured by W. C. Dillon & Co., Van Nuys, Calif. The company makes them up to 100,000 lb capacity and claims they are virtually unaffected by the weather.

A TROWEL BLADES IN MOTION

B CLUTCH CONTROL ON HANDLE IS RELEASED (NOTICE OPERATOR'S LEFT HAND)

C WITHIN ¼ TURN, OR 1/6 OF A SECOND, THE BLADES ARE COMPLETELY STOPPED

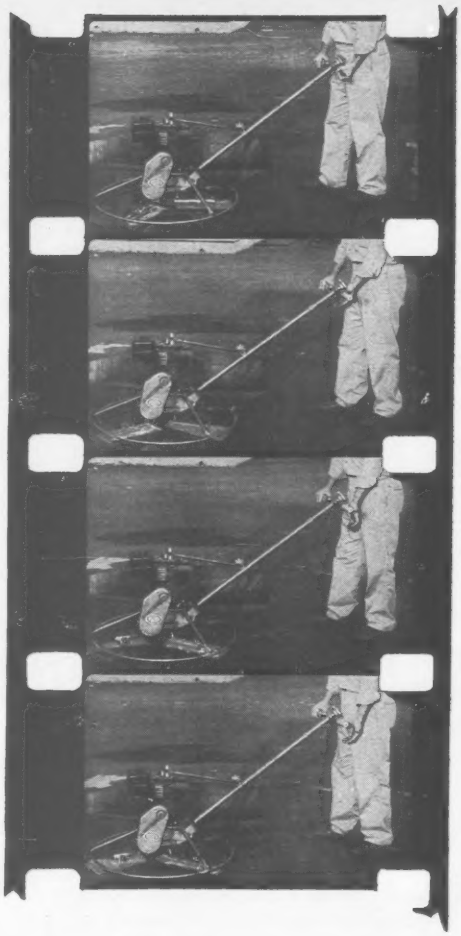

MOVIE FILM PROVES STOW ROTO-TROWEL STOPS *INSTANTLY!*



Close up of manually actuated clutch control which stops blade rotation within 1/6 second, when handle is released.

Just one of the big reasons why STOW ROTO-TROWELS are your best trowel buy! Within *one-sixth of a second*, Stow's Dead-Man Clutch Control stops the blades, but not the engine! That means Stow Roto-Trowels are SAFER, because the trowel blades stop the very *instant* the lever is released. What's more, this clutch makes the engine easier to start, since full throttle can be used if necessary. Stow Roto-Trowels also feature: fixed, non-rotating guard ring; pitch control on the handle; adjustable handle; lifting hook on the engine.

Available in 24, 29, 34 and 46" trowel diameters, in gas or electric models, Stow Roto-Trowels are built for safety and long life . . . built to produce excellent concrete finishes. For complete information on Stow Roto-Trowels, write for Catalog 560.

STOW

STOW MANUFACTURING CO.

19 Shear Street, Binghamton, N. Y.

SOIL-CEMENT—the durable, economical pavement for shoulders on the National Interstate System

One of the notable specifications for the 41,000-mile National System of Interstate and Defense Highways now under construction is the provision that "Shoulders usable by all classes of vehicles in all weather shall be provided."

These shoulders will need to be as long-lasting and durable as the adjacent traffic lanes they are built to serve. That means they should be paved with soil-cement—the only low-first-cost pavement that is sturdy enough to serve for many years and deliver safe, dependable, all-weather service with a minimum of maintenance.

Paving the shoulders on the Interstate System with soil-cement will be economical. About 85% of the material needed will be soil on or near the site. Mixed with portland cement and water, this material provides a sturdy base. Usually a bituminous surface completes the shoulder.

Soil-cement is built to last. It's so durable that practically all of the soil-cement paving built since 1935, when scientific controls were introduced, is still giving all-year, all-weather service with only occasional surface maintenance.

For more information about soil-cement paving write today for free illustrated literature. It is distributed only in the United States and Canada.

PORTLAND CEMENT ASSOCIATION
Dept. A4d-17, 33 West Grand Avenue, Chicago 10, Illinois
A national organization to improve and extend the uses of portland cement and concrete . . . through scientific research and engineering field work

These soil-cement shoulders on U. S. 22 in New Jersey are more than 10 years old.

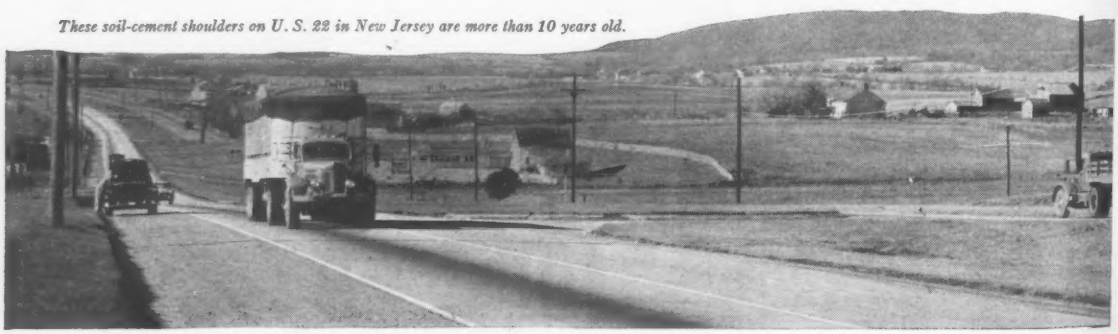

Maj. Gen. John R. Hardin

Mississippi River Engineer Plans to Retire on June 30

Corps of Engineer Maj. Gen. John R. Hardin, for the last four years president of the Mississippi River Commission and division engineer, Lower Mississippi Valley Division, has announced plans to retire effective June 30. He will be leaving the Army after 38 years of service, most of them in flood control and navigation work on the Mississippi.

Some recent major projects he has been associated with are the Old River control project—which will prevent the Mississippi River from leaving its course to the Gulf of Mexico by diverting to the Atchafalaya River—a tidewater channel to the gulf from New Orleans, and the comprehensive review report on the entire Mississippi River and tributaries project.

A 1918 graduate of West Point and MIT '21, General Hardin has served as district engineer at New Orleans and, briefly, as director of the Corps's Waterways Experiment Station at Vicksburg. He also was division engineer of the Great Lakes Division and, from 1939 to 1943, held the post of chief of the Rivers and Harbors Section and executive officer in the Construction Division in Washington, D. C. From 1951 to 1953, he was Assistant Chief of Engineers for Military Construction. During World War 11, General Hardin served as deputy chief engineer of the U. S. Army in the European Theater of Operations.

An active member of technical societies, he has contributed numerous articles to technical journals, especially the American Society of Civil Engineers and the Society of American Military Engineers.

New Engineering Dean Named for Connecticut

Prof. Harold Torgersen has been appointed dean of the school of engineering at the University of Connecticut. He will take over his new duties this summer, when he leaves his present post as associate dean of the college of engineering at New York University.

Professor Torgersen, who succeeds the late Francis L. Castleman, Jr., formerly served as director of the evening division of the College of Engineering at New York University.

Daniel V. Terrell

Engineering Dean to Retire From Kentucky on July 1

Dean Daniel V. Terrell, 1953-54 president of the American Society of Civil Engineers, will retire effective July 1 as dean of the college of engineering, University of Kentucky, at Lexington.

He will be succeeded by Prof. Robert E. Shaver, head of the school's department of civil engineering.

Head of the college since 1946, Dean Terrell has been with the Kentucky teaching staff since 1912, when he joined the faculty as acting professor of highway engineering (ENR Oct. 15,-1953, p. 23). He has served as consultant to the Kentucky Highway Department for over 20 years and is director of its research work. The retiring dean also is associated with the engineering manpower commission of Engineers' Joint Council.

Kenneth E. Fowler

Fowler Named Engineer For Pipe Association

Kenneth E. Fowler has been appointed division engineer of the Corrugated Metal Pipe Association, and from headquarters in Kansas City will represent the group in Kansas, Missouri, Nebraska and Iowa.

Mr. Fowler, who attended the Universities of Kansas and Oklahoma, served as both a city and county engineer in Kansas and as an engineer on construction jobs in the Midwest.

His most recent work has been in the field of pipelines, with emphasis on the problems of corrosion control.

Davidson Named Director Of Corps' Laboratories

Col. Alfred H. Davidson, Jr., is returning from Korea this month to become director of the Corps of Engineers' Engineer Research & Development Laboratories, Fort Belvoir, Va. The position will become effective on departure of the present director, Col. Horace F. Sykes, Jr., who plans to retire from active service.

Colonel Davidson has been serving in Korea as Engineer, Eighth Army. Prior to that job, he was New York District Engineer.

(*M&J continued on page 92*)



IT TAKES TWO

DISPLAY ADVERTISING
• Arouses Interest • Creates Preference
DIRECT MAIL
• Gets Personal Attention • Triggers Action

After your prospect has been convinced by Display Advertising, he still must act. A personalized mailing piece, is a powerful action-getter. Send for our Industrial Direct Mail Catalogue, 150 lists available.

Direct Mail Division,
McGraw-Hill Publishing Co., Inc.
330 West 42 St., N. Y. 36, N. Y.

Please forward my free copy of the McGraw-Hill "Industrial Direct Mail Catalogue."

Name_____
Company_____
Address_____
City_____ State_____

PREDRAIN
Your Wet Jobs
And Make More
PROFIT

MORETRENCH
WELLPOINT
SYSTEM

MORETRENCH CORPORATION
World's Oldest . . . Largest . . .
Most Experienced
Predrainage Organization
Send for Catalog
90 West St., New York 6, N. Y.
Chicago, Ill. • Tampa, Fla. • Houston, Tex.
Rockaway, N. J.

Careers

Government

Col. John S. Harnett will become District Engineer for San Francisco District, Corps of Engineers, effective this July, replacing **Col. John A. Graf**, who will attend the Industrial College of the Armed Forces. **Lt. Col. Seymour Rubenstein** is appointed executive officer for the same district and will assist in supervising a civil works construction program for the Northern California coastal region.

Lt. Col. Raymond O. Miller is assigned as Assistant District Engineer for the Mobile District, Corps of Engineers. He succeeds **Lt. Col. Robert S. Kramer,** who has been ordered to duty in Spain.

James P. Egan, city engineer for Butte, Mont., resigns to become an engineer in the public works office of the Marine Corps Supply Center at Barstow, Calif.

Col. James U. Moorhead will become Assistant Chief of Engineers for Real Estate, Department of the Army, effective this August, replacing **Col. W. W. Ragland** who will be assigned to U. S. Army Europe. Colonel Moorhead now is assigned to Army Forces Far East and has been District Engineer in Miami and Portland, Ore.

James Turner is made acting general manager and chief engineer of the San Francisco municipal water department —the appointment to become permanent July 1 — replacing **George W. Pracy,** who retired April 1 (ENR April 11, p. 97). A University of California graduate, Mr. Turner was manager of the Hetch Hetchy division before he moved into the position he is now about to leave, boss of the city's five utility divisions.

Four shifts in division engineers have been announced by the Ohio Highway Department. **William E. Quicksall** becomes Division 11 engineer; **Dewey Akerman** is Division 8 engineer; **C. R. Hanes** is first assistant engineer of construction for the Department; and **William R. Hauserman** is engineer for Division 3.

George M. Shepard, chief engineer of the Department of Public Works, St. Paul, Minn., since 1922, has been appointed to the new position of Street and Highway Engineering Coordinator. **Arthur W. Tews** has been named chief engineer in the department.

Business

Ford J. Twaits and **Carl H. Wittenberg,** contractors and engineers of Los Angeles, have announced their partnership, to be conducted under the new firm name of Twaits-Wittenberg Co.

William K. Taylor, a soils specialist who did work on soil and sub-grade studies for the Ohio Turnpike and the Indiana Turnpike has joined the firm of Benjamin E. Beavin Co., Baltimore consulting engineers.

Henry Seitz, formerly designing engineer of bridges and buildings, has been named structural engineer for the Baltimore & Ohio Railroad.

George C. Gordon, who had been acting executive director of the Regional Planning Commission of Greater Harrisburg, has joined the Harrisburg engineering firm of Erdman, Anthony & Hosely, Inc.

Ralph Birchard, former chief of specifications, estimates and reports branch of the Air Force Acedemy Construction Agency has joined the staff of Radar and Associates, engineers and architects of Miami, Fla.

R. L. Groover of Wilmington, N. C., has been named assistant general manager of the Atlantic Coast Line Railway and the Charleston & Western Railway. He has been a member of the ACL engineering staff since 1914.

Claude F. Horton has been named executive vice president and director of Construcciones Collins de Venezuela. A Massachuesetts Institute of Technology graduate, Mr. Horton was formerly a vice president of Brown & Root, Inc., in charge of pipeline work.

Francis H. Falkner, retired Corps of Engineers colonel, is appointed chief engineer of the Los Angeles office of Porter, Urquhart, McCreary & O'Brien, consulting engineers, where he will devote much of his time to military construction and water resource development.

Bart D. Williams, since 1947 assistant erection manager for the Birmingham Erection District of the Chicago Bridge & Iron Co., with headquarters in Birmingham, Ala., has been named district manager. Mr. Williams is a civil engineer and a graduate of the University of Illinois.

Robert M. Phelps, who joined the Chicago Bridge & Iron erection department in 1945, has been named manager of the Pacific Coast Erection District, with headquarters in Torrance, Calif. Mr. Phelps is a civil engineer and graduate of Oregon State College.

Dan C. Kline and **George R. Carter** have been appointed erection managers in the American Bridge Division, U.S. Steel Corp. Mr. Kline will be stationed in the Roanoke, Va., office and Mr. Carter in the Chicago office.

Henry W. Smith, assistant chief engineer of B. C. Electric Co.'s engineering division, is appointed assistant general manager of the company's subsidiary firm, B. C. Engineering.

Honors

James A. Brennan, senior civil engineer with the New York State Department of Public Works and a veteran of 52 years with the department, was honored at the annual dinner of the New York State Association of Highway Engineers in Watertown, N. Y. Brennan, who plans to retire next fall, is a member of the New York Society of Professional Engineers and the New York State Association of Highway Engineers.

Walter H. Zinn, former director of Argonne National Laboratory, Lemont, Ill., received the American Power Conference's Certificate of Merit Mar. 27 in recognition of his contribution in the field of nuclear power generation and pioneering achievements in atomic research. Mr. Zinn, now president of General Nuclear Engineering Corp., is the second recipient of the award during the 19 year history of the Conference.

Retirements

Ernest H. Stork, a Columbus, Ohio, city engineering employee for 41 years, retired April 1 as City Planning Director.

Elbert C. Brown, district engineer for the Federal Bureau of Public Roads at Sacramento, retired March 31, winding up a 48-year career in federal service, of which 38 were with the Bureau of Public Roads.

L. C. Bishop has retired after 18 years as Wyoming state engineer.

H. B. Christianson retired April 5 after 40 years in the engineering department of the Chicago, Milwaukee, St. Paul & Pacific Railroad Co. He received his civil engineering degree from the University of Minnesota in 1915 and served for several years as division engineer in Iowa and other mid-western states.

William G. Weber, head of the large gates and valves section of the Bureau of Reclamation's mechanical branch at Denver, retired Mar. 31 after 30 years of service with the Bureau. An authority in the design of large gates and valves, he designed the 50x50 ft bulkhead gates and the 32 ft dia gates for Hoover Dam.

L. C. Anderson, vice president and general manager of Nashville Bridge Co., has retired after more than 30 years' service. **Col. Gilbert N. Dorland** has been named to succeed Mr. Anderson.

Gurney H. Dayett, Sr., formerly assistant to the chief engineer, and John S. Knight, regional engineer at Chicago have retired after long service with the Baltimore & Ohio Railroad.

ARKWRIGHT ODDITIES

Without measuring, can you tell whether the vertical dimension of the silk hat is greater than, equal to, or less than its horizontal dimension? See answer below.

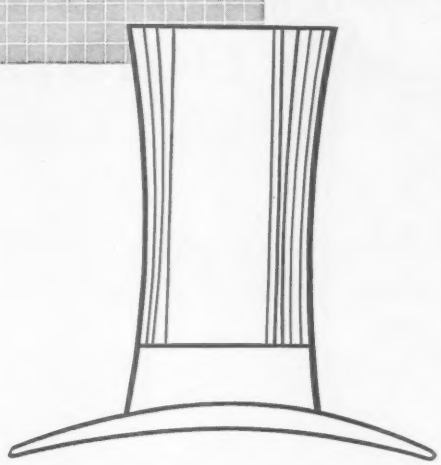

TOP LEVEL PROJECTS CALL FOR FINER CLEANER-INKING ARKWRIGHT TRACING CLOTHS

CHECK THESE ADVANTAGES and see for yourself why Arkwright Tracing Cloths are now being used on many of the nation's foremost engineering projects.

EASY TO USE Because Arkwright's flawless finish is completely free of pinholes, coarse threads and other imperfections, it eliminates blobbing or feathering . . . assures fast, accurate workmanship on job after job.

LONGER LASTING Arkwright's greater transparency and durable finish prevents opacity and brittleness . . . protects drawings against fraying, tearing and curling for years on end.

FINER REPRODUCTION Arkwright's continuous, quality control processing meets rigid Government specifications . . . assures clean, sharp reproductions on even the most detailed drawings. In the simple drawing above, the vertical dimension is equal to the horizontal dimension.

Use the rolls with the blue line that signifies "America's Standard". Write for free samples of Arkwright Tracing Cloths today. Arkwright Finishing Co., Industrial Bank Building, Providence, Rhode Island.

ARKWRIGHT
Tracing Cloths
AMERICA'S STANDARD FOR OVER 35 YEARS

the portable
BUCK HOISTING
machine

. . . gets you there *FASTEST* with the *MOSTEST*

Fastest — in 23 minutes you're up in the air with your first load. 23 minutes from trailing to elevating.

Mostest — Buck takes 2,000 lbs. per load with platform . . . 17 cu. ft. with concrete bucket.

Highest — Takes your materials quickly to heights 100 ft. and up.

Lowest cost per ton lifted. No additional personnel required . . . one man does it all . . . easily.

There's nothing like the Buck . . . it's a portable, self-erecting, self-contained hoisting machine.

For a free demonstration and more information contact any of the 73 Buck Dealers or write direct:

BUCK EQUIPMENT CORP.
720-E Anderson Ferry Rd., Cincinnati 38, Ohio

Obituaries

John V. Boland, Sr., 84, founder of John V. Boland Construction Co. of St. Louis, died in St. Louis on Feb. 23. He entered the construction field as an industrial contractor and specialized in municipal and utility power-plant construction, boiler settings and chimney construction.

George C. Murphy, 67, home builder and realtor, died Mar. 12 in Louisville, Ky. Mr. Murphy, trained as an architect and electrical engineer, retired 10 years ago as head of Murphy Elevator Co., which he helped found. Before founding that company, he was with American Elevator & Machine Co. for 20 years, 10 as sales manager.

J. Upton Gribben, 84, architect, died Mar. 18 in Columbus, Ohio. Mr. Gribben designed many of the church buildings that were erected in Columbus during the first quarter of the century. He was consulting architect for the 555 ft American Insurance Union office building—now known as the LeVeque-Lincoln tower—when it was built in Columbus in 1927.

Theodore Koch, 72, architect, died in Staten Island, N. Y., Mar. 23. Except for a period between 1935 and 1936 when he worked with the U. S. Bureau of Biological Survey in North Dakota and Washington, Mr. Koch spent the greater part of his career with the architectural firm of McKim, Mead & White. He was with that firm from 1920 until 1944 and was supervising architect for Bellevue Hospital's Administration Building, the Savoy-Plaza Hotel and Girard Trust Co. in Philadelphia.

Hilles C. Bolon, 50, project engineer for the Mound St. Interchange of the Columbus, Ohio, expressway program, died Mar. 23. He was a federal ordnance employee before entering the city engineering post more than a year ago.

Russell A. Myers, 60, for three terms Vigo County, Ind., engineer, and more recently superintendent of Wabash Valley Asphalt Co., Terre Haute, died Mar. 17. He was a graduate of Purdue University.

Howard Chapman, 82, retired New York architect, died April 8 in Noroton, Conn. Mr. Chapman headed his own firm for many years. He was a graduate of Columbia College, class of 1899, and also attended the Ecole des Beaux Arts in Paris.

NEW—SECOND EDITION

FIRST PRINTING

completely revised and conforming to the recently revised A.C.I. CODE

NEW ADDED DATA:

Design Curves for Solid Slabs,
Concrete Joists & Beams
Stair Slabs, Pits, and Precast Lintels
"Waffle" or Dome Flat Slabs
Stirrups by the New A.C.I. 318-56
Ultimate Strength Design Summary
Fire Resistance in Concrete Floors
Side Sway in Rigid Frames
Load Tests on Soils
Concrete Specifications
Grain Elevators
Deflections

NO FORMULAS
NO CALCULATING

You start with load and span data . . . read size of member and steel data directly from tables.

Here is the book (of which there are over forty thousand copies in use) completely revised and with much new added material—a "must" for engineers and designers working with reinforced concrete—a practical working tool since 1952.

The *CRSI Design Handbook* has tables covering practically every type of reinforced concrete building member, reducing problems of stress and load to simple table references. Attractive, sturdy, flexible cover.

Prepared under the direction of The Committee on Engineering Practice

CONCRETE REINFORCING STEEL INSTITUTE
38 South Dearborn Street, Chicago 3, Illinois

SEND FOR YOUR COPY . . . TODAY!

OVER 450 PAGES
6" x 9"
$6.00

CONCRETE REINFORCING STEEL INSTITUTE
38 So. Dearborn Street (Div. D), Chicago 3, Ill.

I am enclosing $6.00. Please send me a copy of "CRSI Design Handbook." If not completely satisfied, I will return the book within 10 days for full refund. (No C.O.D. orders accepted.)

Name_____

Address_____

City_____ Zone____ State_____

KANSAS TURNPIKE Self widener purchased for use on Kansas City, Missouri, Freeway interchanges—built in flexibility made use on Kansas Turnpike equally profitable.

Again Flex-Plane has the nation's number one finisher

For the past three years, contractors have bought more Flex-Planes than all other makes — They will again in 1957...here's why

From the moment the FLEX-PLANE finisher wa introduced it has been the favorite of the nation' highway builders. For the past three years it ha been in a class by itself—the most versatile, mos flexible, most portable and least expensive to operate of any machine on forms.

Now, for 1957, the FLEX-PLANE finisher is even

INDIANA TURNPIKE More miles of Indiana Turnpike were finished with Flex-Plane machines than any other.

NEW JERSEY TURNPIKE Holland Tunnel cutoff had many ramps sections. Self-widening feature paid

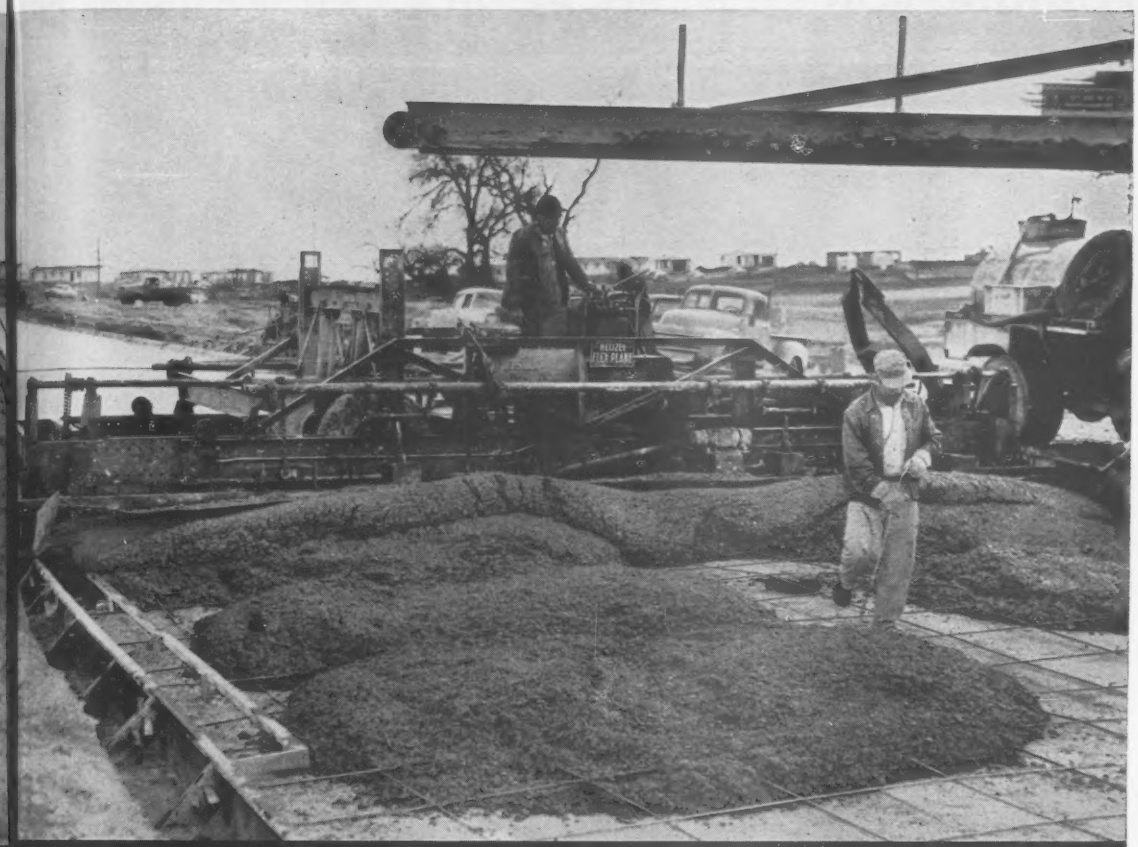

TEXAS CITY STREETS Contractor reported highest pouring ever. Credits Flex-Plane. Note amount of concrete in front of screed here.

better! It is more flexible, stronger and faster than ever! Inherent frame design features allow the greatest amount of flexibility—*even as much as 12 to 25 feet in one machine!* And, there is a complete line of FLEX-PLANES to cover any width range desired. Only FLEX-PLANE self-widening offers independent control of extension frames, which means both sides of the machine can be extended or retracted together—*or individually*, for the negotiation of complicated interchange patterns involving variable width and short radius super elevated curves. But, more important, it is the only really proved self-widening machine available today. More than 60 units operating throughout the nation attest to this.

The FLEX-PLANE carries the largest screeds in the industry-delivering the most satisfactory finish possible. Exclusive butt joint screed design enables screed lengths to be changed faster, easier than ever before. It is completely portable—a flick of the finger and it, instantaneously, becomes its own trailer.

Why not let FLEX-PLANE put you in contact with a FLEX-PLANE user? Talk to him and we are sure you, too, will GO FLEX-PLANE IN 1957!

I STATE PARKWAY Contractor watched machine operate on nearby Route I project. Bought immediately.

THE FLEXIBLE ROAD JOINT MACHINE COMPANY
505 THOMAS ROAD • WARREN, OHIO

TORRINGTON *SPHERICAL ROLLER* BEARINGS

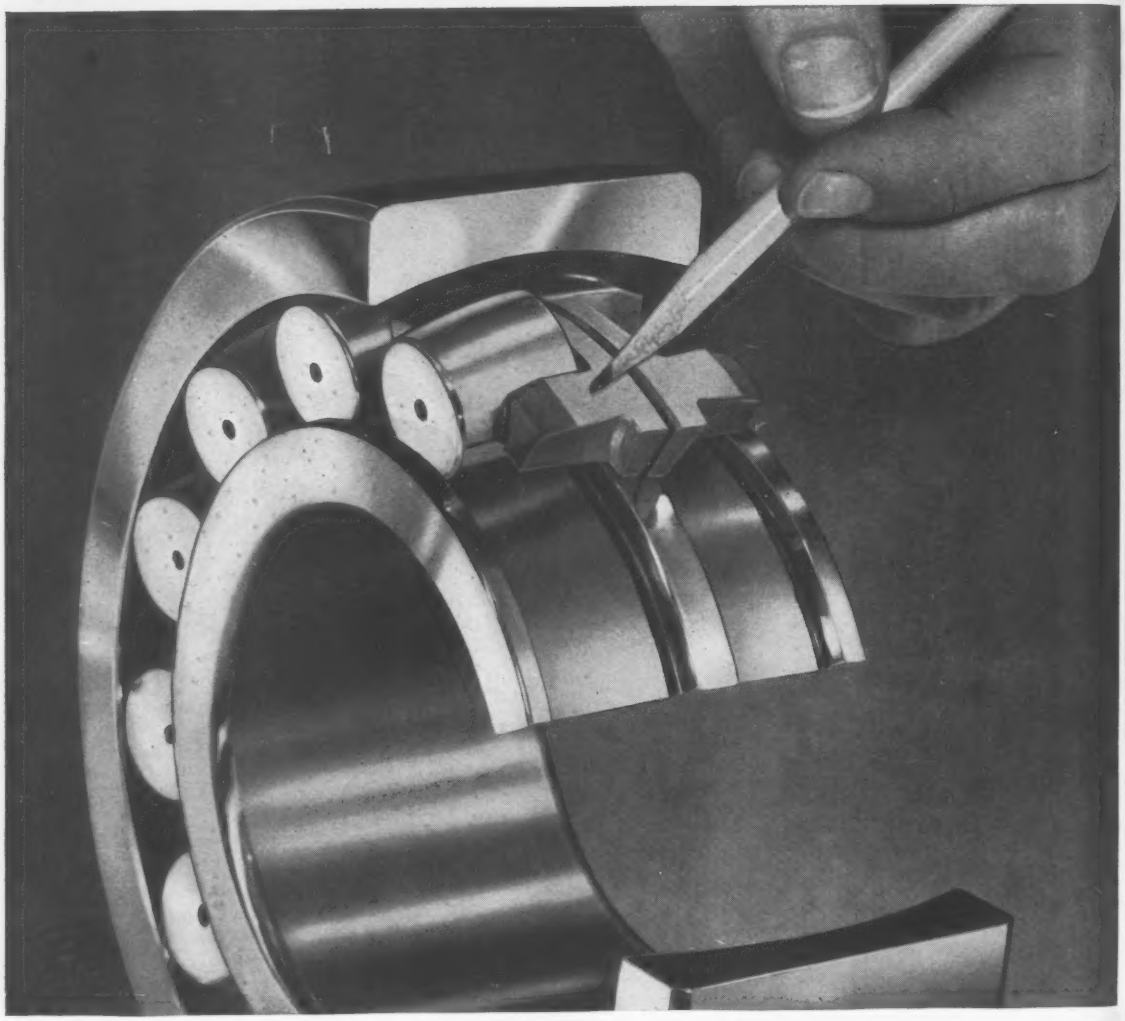

Land-riding cages for longer life!

These fully machined cast-bronze, land-riding cages—one for each path of rollers—are important performance builders in TORRINGTON'S Spherical Roller Bearings. The one-piece retainers keep the rollers perfectly aligned at all times, even under conditions of shock load and sustained speeds. Lubrication is more effective, too, as the lubricant has easy access to vital points of contact between rollers and races.

This feature is typical of TORRINGTON'S design, made possible through long experience in serving industry with the finest in precision bearings. That's why it pays to look to TORRINGTON first when your application calls for Spherical Roller Bearings. They're available from stock with either straight or tapered bore, for shaft or adapter mounting.

THE TORRINGTON COMPANY
South Bend 21, Ind. • Torrington, Conn.
District offices and distributors in principal cities of United States and Canada

Visit Torrington at the 1957 Design Engineering Show, New York Coliseum May 20 to 23

TORRINGTON BEARINGS

Spherical Roller • Tapered Roller • Cylindrical Roller Needle • Ball • Needle Rollers

Contractor Is Held Bound By Vague Delivery Dates

It is not within the province of a court to grant relief to a contractor from a poor bargain to which he has committed himself.

In a New York case the contractor's dilemma was a price squeeze that flowed from the contract's failure to set a time limit on performance under the contract. The facts were these:

A subcontractor submitted a bid to the general contractor to deliver steel and pipe railings. The general contractor prepared and signed a purchase order and sent it to the subcontractor who signed it and returned it to the general contractor. As signed by both parties, the order provided that the date for delivery or starting work was "when and required."

The general contractor did not furnish the subcontractor with working drawings until about a year after the contract was signed, at which time the general contractor asked for prompt delivery of the material covered by the order. The subcontractor refused to furnish the material unless he was paid a higher price, contending he was justified in doing so because of the delay of the general contractor in furnishing the working drawings. He was unable, he said, to acquire the needed material and, as a result of strikes and other conditions, steel was relatively scarce and high in price—conditions that were created by the general contractor. The general contractor refused to increase the price set forth in the contract and, upon the refusal of the subcontractor to furnish the material, bought it from another firm at an increased price. He then brought an action against the subcontractor and his surety to recover the difference in cost.

Upon the above facts, the general contractor applied to the court for a summary judgment, which the court granted. The court held that the only issue involved was the actual amount of damage.[1]

In explaining its decision, the court said: "The only possible conclusion is that the subcontractor gambled on his being able to acquire and supply at a profit the material 'when and as required' by the contractor, presumably as needed by it in the general progress of the construction job. He made no attempt to protect himself by setting a time limit for the submission of the drawings or against a rise in the price of steel during the period necessarily intervening before plaintiff (general contractor) might require delivery.

"The courts cannot make contracts for parties but are limited to carrying out those which they themselves have voluntarily made, however improvident they turn out to be. There being no showing of bad faith with regard to the time when plaintiff 'required' delivery, no reason exists for refusing to hold the subcontractor to his bargain."

(1) Terry Contracting, Inc. v. Commercial Insurance Co., 156 N.Y.S. 2d 285, Supreme Court, New York County, N. Y., Sept. 12, 1956.

Loss of Rent Recovered For Delayed Performance

Loss of rents may be included as an item of damages in the amount an owner may recover from a contractor for delayed performance.

In one case, for example, a building contractor sought to recover the balance due under a contract. The owner counterclaimed for the sum he had paid another contractor to complete the work, and, in addition, the loss of rental resulting from delayed performance of the work. The owner obtained a judgment at the trial on his counterclaim and the judgment was affirmed on appeal.[1]

The case stemmed from a contract for construction of a building, which was to be completed and ready for occupancy by May 1, 1951. The contractor had knowledge of the fact that the owner had entered into a ten year lease of the building, said lease to start on May 1, 1951, the date of completion set forth in the contract. The construction contract contained no provision for liquidated damages for delayed performance nor any specific penalty for the failure to complete the building by May 1, 1951.

In April, 1951, certain changes were made in the specifications covering the interior painting work. In July, the architect informed the owner that the painting job did not comply with the specifications and the owner thereafter entered into an agreement with the contractor to repaint the defective part of the work and the owner agreed to pay the contractor the additional sum of $350. The owner also agreed to waive any claim for damages for delayed performance if the contractor completed the job and the same could be occupied by the tenant by July 13, 1951. The contractor did not complete the work by July 13, 1951, and the owner and tenant entered into an agreement whereby the tenant would take possession of the building on July 16, 1951, and would employ another contractor to complete the work and the owner would reimburse the tenant for the expense so incurred.

The counterclaim interposed by the owner was for the sum of $3,000 paid to the tenant as the cost of completing the work and for loss of rent from May 1, 1951, the date for completion set forth in the contract. The contractor claimed that the owner had waived his right to damages for delayed performance. The court held that the waiver was conditioned on the contractor completing the work by July 13, 1951, and as this condition had not been complied with, the owner did not waive the right to recover damages for delayed performance.

(1) Lidral v. Sixth and Battery Corp., 290 P. 2d 459.

No Contract Revocation After Bid Is Accepted

A number of cases have arisen over the question of whether a municipality, after awarding a contract to the lowest bidder, can rescind the contract and give it to the second lowest bidder. The answer is generally "no." The legal reasoning is explained in this case.

The city council of a municipality had passed a resolution declaring a contractor the lowest bidder and awarding him the contract. Thereafter, the resolution was rescinded and the contract was awarded to the second lowest bidder. The contractor who had submitted the lowest bid and to whom the contract was originally awarded, instituted an action to determine the validity of the resolution passed by the council rescinding the resolution awarding the contract to him. The trial court held that the council had the right to rescind the resolution awarding the contract to the lowest bidder, but this determination was reversed by the appellate court,[1] which held that once the contract had been awarded, the council had no right to rescind such action.

The appellate court stated: "It has long been decided in this and other states and in the courts of the United States that in the letting of contracts for the doing of public works where the legislative body or the administrative officer is required by statute to call for bids and must under competitive bidding conditions let the contract to the lowest responsible bidder, the making of the award gives rise to a contract between the public body or agent and the successful bidder. (Citing many authorities). In 10 McQuillin on Mu-

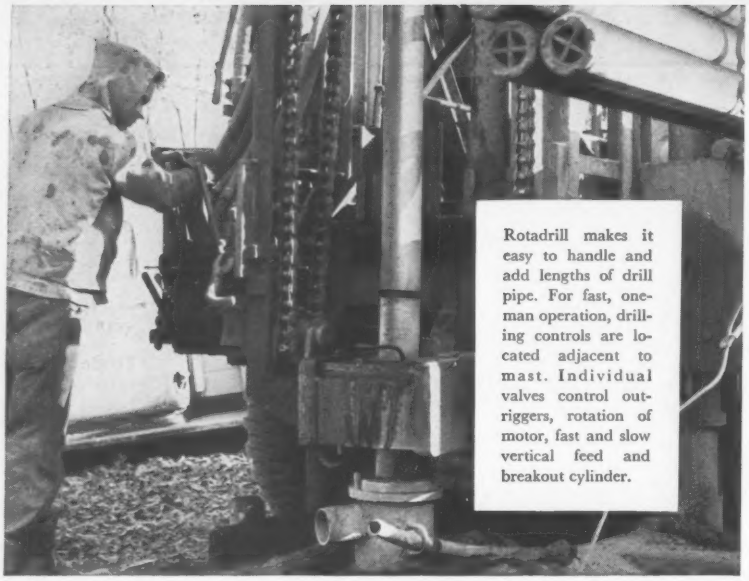

Rotadrill makes it easy to handle and add lengths of drill pipe. For fast, one-man operation, drilling controls are located adjacent to mast. Individual valves control outriggers, rotation of motor, fast and slow vertical feed and breakout cylinder.

FIELD TESTS PROVE:

One man can add drill pipe in 5 minutes

Fast drilling is indicated by heavy dust coming from primary dust collector and very fine dust blowing from stack. Note position of Truck Mounted Rotadrill—right at edge of excavation. You can drive this unit right to the job—even in locations where bigger rigs can't go.

Heavy structural steel mast, raised and lowered hydraulically, travels safely between jobs on crotch. Set-up is simplicity itself; the operator simply lowers outriggers, raises mast and attaches drill pipe and bit.

Actually, adding to the drill string takes *less* than five minutes with the Schramm Truck Mounted Rotadrill. One man does the job without delay or danger.

Big reason is that controls for breaking pipe joints are located near the mast—along with controls for starting, stopping, rotation, down pressure and rapid traverse. Also, there's no rotating table or Kelly bar. Fast vertical action of rotative head serves as pipe hoist for adding pipe or pulling drill string. Slip holders open easily for setting of casing and enough pipe is carried on the rig to drill a well.

Truck Mounted Rotadrill sets up for work in minutes—makes hole faster than any other type of drill rig. Rotary air drilling, with the Schramm Rotadrill, means 600% to 700% faster penetration. Because compressed air continuously cleans the hole, the drill bit works on new rock instead of regrinding chips.

With 26,000 pounds down pressure, the Rotadrill can drill a 6¼" hole with 4½" O.D. pipe to a depth of 700 feet. Under certain conditions, larger holes can be drilled with a 4½" O.D. pipe. With a smaller drill pipe, smaller holes can be drilled to 1500 feet.

Full cost-cutting details of Schramm Truck Mounted Rotadrill are yours without obligation. Write for Bulletin TMR-55 and ask for "Rotary Rock Drilling with Schramm Air Compressors."

Your local Schramm Dealer is listed in the Yellow Pages of your telephone directory.

Schramm, Inc.

MANUFACTURERS OF AIR COMPRESSORS

620 North Garfield Ave. • West Chester, Pa.

nicipal Corporations, third edition (1950), section 29.71, page 343, the rule is accurately stated, thus: 'While it is true that a municipal corporation has discretion as to the time and manner of making corporate improvements and the purchase of supplies, still when this discretion has been exercised and a contract made relative thereto, the legislative function has been exhausted, and the duty has become purely ministerial, and a contract so made cannot be impaired at the option of the municipality. Hence, when a bid has been accepted by the proper authorities, such acceptance cannot be revoked.'"

(1) City of Susanville v. Lee C. Hess Company, 290 P. 2d 520.

Contract May Specify Extra Work Procedure

A contractor may lose his right to compensation for extra work by his failure to follow the procedural requirements imposed by the contract. The right was lost in the following case, which was filed by a subcontractor against the general contractor. The prime contractor had refused to pay for extra work on the ground that the subcontractor has not complied with the formalities of the contract.

The prime contract contained the following provision: "If the contractor claims that any instructions by drawings or otherwise involve extra cost or extension of time, he shall, within 10 days after the receipt of such instructions, and in any event before proceeding to execute the work, submit his protest thereto in writing to the Contracting Officer, stating clearly and in detail the basis of the objections. No such claim shall be valid unless so made."

The subcontractor obtained a judgment at the trial, but this judgment was reversed on appeal and the action dismissed on the ground that the subcontractor had not complied with the contract requirement entitling him to payment for extra work.[1] The appellate court stated: "A provision similar to the one here is frequently found in construction contracts, and it has been uniformly held that such provision is valid, as a consequence of which, in the absence of conduct operating as a waiver or giving rise to an estoppel, failure to make a claim for extra work in the manner and within the time specified precludes recovery therefor."

(1) Enochs v. Christie, 291 P. 2d 200.

These summaries of court decisions are prepared by I. Vernon Werbin, New York attorney and civil engineer.

Data on Plastics

TECHNICAL DATA ON PLASTICS—Manufacturing Chemists' Association, Inc., 1625 Eye St., N.W., Washington, D. C. 224 pp. $3.25.

The revised 5th edition of an industry handbook describes and catalogs properties of all commercially available plastics.

The handbook lists graphical and tabular data on fabrication, durability, electrical, mechanical and miscellaneous properties of 25 types of plastics.

Also contained in the book for the first time is a chapter by Prof. A. G. H. Dietz of Massachusetts Institute of technology entitled, "Designing Plastics for Strength."

The handbook is expected to be in great demand because of the expanding markets for plastics, particularly in the construction industry where such technical data are needed by regulatory officials, engineers and architects.

Miscellaneous Notes

• **Plain vs grooved nails**—VPI Wood Research Laboratory reports the results of comparative tests performed on plain-shanked, fluted and threaded nails. These tests were run immediately after driving and after exposure periods that simulated accelerated service conditions. Test data showed that the fluted and threaded shanks provide an average effectiveness of 4.9 times that of the plain-shanked nails. The 24 page booklet is available from the Virginia Polytechnic Institute Wood Research Laboratory, Blacksburg, Va.

• **For Surveyors**—The fifth edition (204 pages) of Review Questions for Surveyors, published by R. C. Brinker, Box 153, Blacksburg, Va., is now available. In addition to up-dating all reference material included in earlier editions, the fifth edition contains sample registration examinations from 10 states. Price $3.50, single copy; $3.00 per copy on orders of five or more.

• **Tidal Hydraulics**—Revised edition of "Tidal Hydraulics" has been completed since the death of its author, the late Brig. Gen. G. B. Pillsbury. This paper is intended to develop the nature of those variations of the tides and tidal currents that are of interest to engineers engaged in harbor development. A method for computing the currents and tides to be expected in a proposed navigation channel is presented. The treatment of the tides and tidal datum planes in the first four chapters is drawn from the manual issued by the U. S. Coast and Geodetic Survey, and from Harris' Manual of Tides. A method for computing the currents and tides in a proposed tidal channel from the constants commonly applied to steady flow, but with the effect of acceleration and deceleration of the tidal current included, is given in chapters V and VI. The tidal flow in estuaries, bays, and other natural tidal waters is discussed in chapters VII to X. Copies may be obtained from the Waterways Experiment Station, P. O. Box 631, Vicksburg, Miss., for $2.50 each.

• **Ohio River Data**—First installment of a "diary" that reveals the varying moods of the Ohio River in terms of water quality and flow changes has been published by the Ohio River Valley Water Sanitation Commission. It is a recording of four years of continuous chemical and bacteriological analyses from a network of 43 monitor stations. The publication also includes a hydrographic study of the flow variability pattern of the Ohio River, particularly with regard to the occurrence of minimum flows. Orsanco believes this compilation of basic data is vital in providing facts from which it can diagnose changing conditions and check compliances with clean-stream regulations.

Starting with eleven stations in 1951, the Commission has now augmented its monitor network to secure data from 43 locations on the Ohio River and many of its tributaries. Fifteen of the stations are operated through the aid of public, private and industrial water purveyors. The other stations are serviced under a cooperative contract with the U. S. Geological Survey and Corps of Engineers. Copies of the 112 page report, titled "Water Quality and Flow Variations in the Ohio River," are available for $2 from Orsanco headquarters, 414 Walnut St., Cincinnati 2, Ohio.

• **"Evaluation of Highway Bridges"** reports the results of a study of methods for evaluating the load-carrying capacity of existing bridges. The results are presented in three parts; an introductory discussion of the fundamental considerations involved, a review of practices in rating bridges in various parts of the world, and a series of recommendations that could be used as a basis for a specification. Copies may be obtained from the Ontario Joint Research Programme, Queen's University, Kingston, Ont. Also available is a supplement to the above report "Proposed Specifications for the Rating of Existing Bridges".

no contractor can afford to be without self-propelled air compressors

Reminder. New folder. Money-saving ideas. Offered just last month. You want to have a free copy. Write or call us today.

Schramm, Inc.
MANUFACTURERS OF AIR COMPRESSORS
620 North Garfield Ave. • West Chester, Pa.

RUBBER
WATERSTOPS
FOR MASONRY CONSTRUCTION JOINTS



Williams Efficiency Waterstops are made from Natural Rubber Stock, and designed for maximum effectiveness in any type of cast-in-place construction joint. They will bend around corners—will not tear from shear action. Tensile Test: 3990 lbs.; Elongation Test: 650%. Available in rolls up to 80 feet in length. Field splicing is simple. Williams Waterstops can also be furnished in Neoprene for industrial uses where resistance to oil and other injurious wastes is desirable. These highly effective Waterstops are now in use in hundreds of industrial plants, commercial and public buildings throughout the country.

See Sweet's, or Write for Information.

WILLIAMS
EQUIPMENT and SUPPLY CO.
6001 E. McNichols Rd., Detroit 12, Mich.

from
●
●
OFFICE MANAGER
●
to
●
GENERAL MANAGER
●
●

yes, that is the quality of the personnel available to your organization through the Classified Advertising pages of ENGINEERING NEWS-RECORD.

Classified Advertising Division
ENGINEERING NEWS-RECORD
330 W. 42nd St. New York 36, N. Y.

McKIERNAN-TERRY
WIDE-RANGE LINE OF
PILE
HAMMERS
AND
EXTRACTORS



Now made in complete standardized line of 11 double-acting hammers, 5 single-acting hammers and 2 double-acting extractors. Also Sand Drain Equipment and Steam Generators.

Write for free descriptive Bulletins.
Also builders of coal and ore bridges and unloaders, and specially designed machinery.

McKIERNAN-TERRY CORP.
32 Mercer Street, Dover, N. J.

Swing Truss Bridge in Swampy Area, Louisiana

The $625,285 Bayou Lacassine Bridge includes one 204 ft steel truss swing span and fifteen 40 ft I-beam spans to carry a 24 ft roadway. It is located on Hayes-Lake Arthur Highway in Jefferson Davis Parish, La., where it will replace an obsolete creosoted timber pile bridge with a 70 ft steel center span constructed in 1926.

Work is for the Louisiana Department of Highways in Baton Rouge. T. T. Chenet, Welch, La., is project engineer and C. C. Bernard, Baton Rouge, is project control engineer.

The successful bid from T. L. James & Co., Inc., Ruston, La., is 7.3% above the engineer's estimate and only 0.5% below the nearest competitor.

Swampy grounds at the site require considerable demucking and the hauling of material for the embankment.

Bituminous roadway pavement on the approaches will be placed on a 16 in. lime soil base course. No bids were received on the alternate for a combined clam and reef shell and soil lime base course with bituminous primer.

Class A concrete must contain six bags of cement per cu yd, class D concrete five bags and class S concrete calls for seven bags of cement.

The six bidders include:

1C	T. L. James & Co., Inc., Ruston, La	$625,285
2	H. L. Allen & Sons, Elton, La	628,510
6	Kansas City Bridge Co., Plaquemine, La	836,091
EE	T. T. Chenet, Welsh, La	582,603

Bids: 1-30-57 Items	Unit	Quantity	Unit Prices 1C	2
Exc, common	cy	26,904	$0.38	$0.45
drainage	cy	9,757	0.40	0.55
muck	cy	52,346	0.35	0.65
special borrow	cy	100,605	0.70	0.75
structural	ry	771.52	14.00	20.00
Watering	Mgal	87	3.00	3.00
Seeding	lb	261	3.00	3.00
Fertilizing, common, 8-8-8	lb	7,000	0.10	0.06
Base crse, clam & reef shell soil lime, 12% lime by vol	cy	6,202	....	....
6"	sy	14,940.1	....	....
8", alternate	sy	15,386.1	1.00	1.10
8", alternate	sy	9,900.8	1.00	1.10
Surf crse, clam & reef shell	cy	601	4.00	5.00
Bituminous primer	gal	2,365	....	....
Asphalt cement	gal	8,108	0.20	0.20
Aggregate, coarse, size 1	cy	180	6.50	9.23
fine, size 2	cy	100	6.50	9.23
seal, size 3	cy	68	6.50	9.23
Concrete, class A	cy	751.08	78.00	70.00
class D	cy	99.35	52.00	70.00
class S	cy	152.46	57.50	50.00
Steel, reinf, deformed	lb	109,026	0.153	0.15
fabric, carbon	lb	379,296	0.314	0.27
silicon	lb	213,035	0.28	0.27
Timber, treated	Mfbm	20.495	500.00	550.00
RCCP, SS, 24"	lf	204	6.00	6.50
36"	lf	228	10.00	10.00
Piles, precast conc, 14"	lf	2,050	7.00	8.50
16"	lf	1,280	8.40	10.00
18"	lf	720	11.40	14.00
timber, treated	lf	10,215	2.30	2.50
cip conc, 16"	lf	1,620	10.75	12.50
jetting	ea	86	1.25	free
Test piles, conc, unloaded	ea	5	1,125	2,000
cip conc, unld	ea	1	1,875	2,000
loading	ea	6	625.00	300.00
Bridge machinery, movable	ls	job	43,500	36,000
flooring, open grid	sf	4,924	8.00	6.70
Approach slabs, conc	sy	108.16	10.00	10.00
Fence, barbed wire, new	sta	14.35	25.00	25.00
Single gate, swinging, driveway	ea	1	60.00	45.00
Markers, ROW, conc posts	ea	22	6.00	6.00
Signs and barricades	ls	job	1,000	2,500
Gates, traffic barrier	ls	job	1,000	2,500
Clear & grub	ls	job	7,500	2,000
Detour temp emb & surf	lf	500	4.00	5.00
Salvaged matl, haul	ls	job	2,000	2,000
Access road	lf	499	5.00	5.50
Remove bridges	ls	job	10,100	5,050
Rem & reloc bldgs & misc structures	ls	job	400.00	900.00
Move bldgs & misc structures	ls	job	free	free

Time to complete: 300 calendar days
Liquidated damages: Amount of construction engineering

Illinois Water Sytem Draws Twelve Bidders

Water line extensions with 6,040 lin ft cast iron pipe and 116 service connections will supply water to a newly developed part of Altamont, Effingham County, Ill. This city of 1,580 population operates its own water plant and power station. Mayor Frank A. Bauer is president of the Board of Local Improvements. Russell, Axon & Associates of St. Louis, Mo., are consulting engineers.

The $21,779 contract drew 12 bids. It went to W. L. Hall, Contractor, Atwood, Ill., at a bargain price 20% below the engineer's estimate but only 1% below the second low bid.

Bids on the time to complete the job ranged from 60 to 180 calendar days. The contractor bid 60 days.

Class 150 cast iron pipe, 4 in. and 6 in. in diameter, must conform with ASTM standards A21.2, A21.6 or A21.8.

Scheduled wage rates are $3.00 for skilled labor, $2.50 for semi-skilled and $2.00 for common labor.

Bidders include.

1C	W. L. Hall, Atwood, Ill	$21,779
2	C. A. McNeely, Vandalia, Ill	22,003
12	Carbar Construction Co., St. Louis, Mo	32,952
EE	Russell, Axon, & Assoc., St. Louis, Mo	27,228

Bids: 1-14-57 Items	Unit	Quantity	Unit Prices 1C	2
Water Line Extensions				
CIP, 6", f&i	lf	2,230	$2.53	$2.85
4", f&i	lf	3,810	1.90	1.95
Specials, CI, f&i	lb	3,150	0.30	0.28
Gate valve & box, 6", f&i	ea	2	81.50	86.15
4", f&i	ea	10	63.00	65.50
Fire hydrant w/2 hose nozzles, 2 1/2" & line connect,				
6", f&i	ea	1	150.00	135.74
4", f&i	ea	6	135.00	136.90
& 1 pumper nozzle, 4 1/2" & line conn, 6"	ea	1	180.00	150.40
Pavement, concrete, replace	sy	10	4.00	14.00
asphalt, replace	sy	35	2.00	10.00
Cut-in conn to exist water main, construct	ea	8	50.00	106.00
Subtotal		$16,269		$17,940
Service Connections				
Service connections, f&i	ea	116	47.50	35.00
Deduct or add per ft if serv conn is more or less than 25 ft	lf	.....	1.10	1.15
Subtotal		$5,510		$4,060

Time to complete: 60 calendar days
Liquidated damages: $25.00 per day

MASONITE

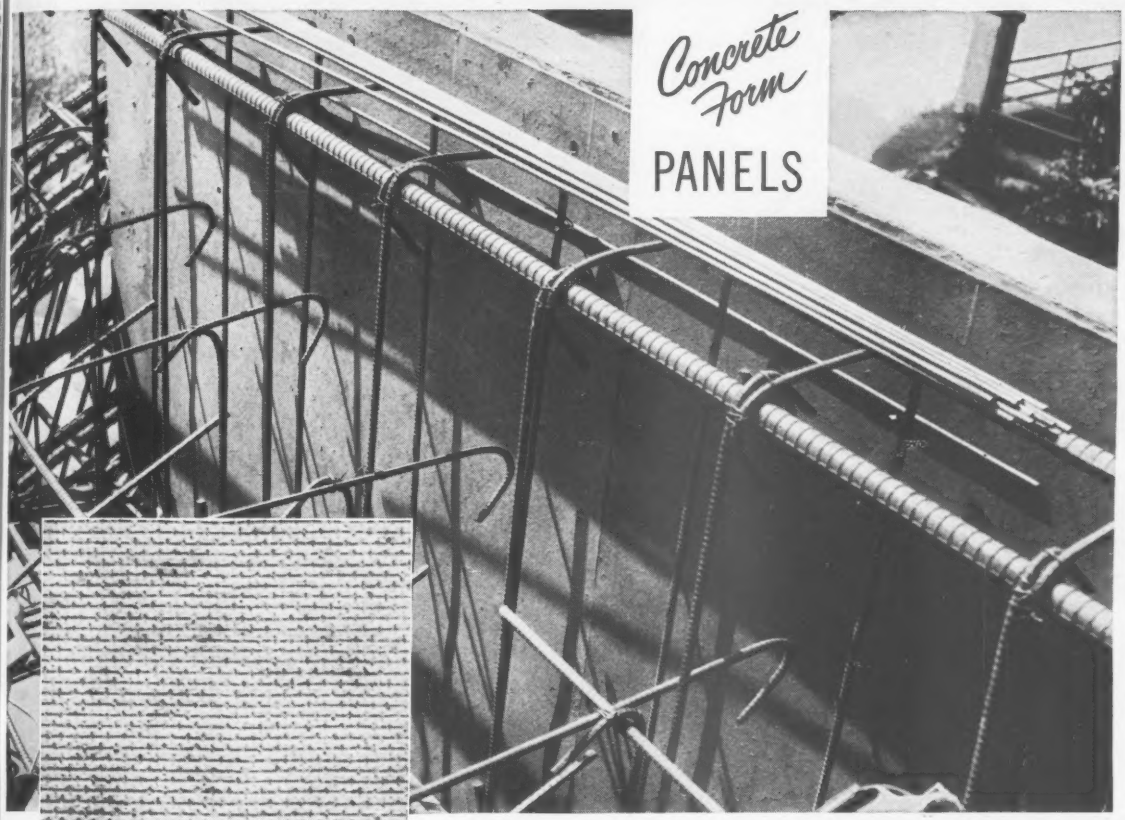

Catholic High School Gymnasium, Memphis, Tenn. Architect: Walk C. Jones, Jr., Memphis. General Contractor: F. T. Thayer Const., Co., Memphis

Finished effects with far less finishing

Screen side to concrete (as shown above)

- Cuts hand rubbing costs 50% or more.
- Where painting is required, provides a superior paint bonding surface.

Smooth side to concrete. For smooth, blemish-free, painted or unpainted surfaces. Hand rubbing virtually eliminated.

Spend less for hand rubbing—up to 50% less.

Pour against the screen side of Masonite Concrete Form Presdwood®. You'll find the tiny projections left in the concrete actually speed up the rubbing process, give you a better finish—faster!

These dense, grainless panels are easy to work, using ordinary carpenter tools...easy to handle...leave no blemishes...won't split, splinter or crack. And you can use them again and again. Send the coupon for a free sample.

®Masonite Corporation—manufacturer of quality panel products

MASONITE® PRODUCTS

MASONITE CORPORATION
Dept. ENR-425, Box 777, Chicago 90, Ill.
Please send me a sample of Concrete Form Presdwood and your booklet on cutting costs.

Name.....
Firm.....*Title*.....
Address.....
City.....*State*.....
Zone.....*County*.....

Materials and Labor Prices

Monthly Market Quotations by ENR Field Reporters

See following ENR issues for OTHER PRICES

- Cement, Aggregate, Ready-mixed Concrete, Asphalt: Last, Apr 4; Next May 9
- Iron and Steel Products, Pipe: Last, Apr 11; May 16
- Wood Products, Glass, Explosives, Chemicals: Last, Apr 18; Next, May 23
- Clay Products, Lime, Plaster, Paint, Roofing: Last, Apr 25; Next, May 30

STRUCTURAL CLAY BUILDING TILE, BRICK AND LIME—DELIVERED

	STRUCTURAL CLAY TILE PARTITION — SCORED Per M. lots of 2,000 pieces or over, 3x12x12 In.	4x12x12 In.	8x12x12 In.	STRUCTURAL CLAY TILE — LOAD BEARING — SCORED Per M. lots of 2,000 pieces or over, 8x12x12 In.	10x12x12 In.	12x12x12 In.	BRICK Per M. In quantity Common backing	Straight hard	LIME Per ton, In paper, Carload lot, Hydrated finishing	Common hydrated	Pulverized or lump
Atlanta	$149.90p	$149.90p	$299.80p	$334.55p	.....	.....	$30.50p	$32.70p	$23.50	$24.50	$.....
Baltimore	203.00	217.00	406.00	485.50	596.00	681.00	36.00k	41.00k	33.00	22.00	.....
Birmingham	135.00p	152.00p	.....	303.00p	376.00p	455.00p	27.00ff	38.00gg	35.02	22.30	26.33
Boston	217.00†	231.00†	434.00†	520.50†	.....	.....	41.50p	46.50p	39.20†	31.20†	.....
Chicago	135.00	145.00	280.00	.....	.....	.....	30.00	32.00	38.00	35.20o	.....
Cincinnati	205.00j	225.00j	296.00jdd	213.00j	288.00j	314.00j	45.75j	47.00j	30.04j	26.04j	30.04j
Cleveland	209.00	223.00	.....	.....	.....	.....	43.00	47.00	31.00	26.00	.....
Dallas	152.00	162.00	277.50	337.50	414.75	513.50	25.75	45.00	37.86	25.08	.....
Denver	.....	.....	.....	.....	.....	.....	36.00	47.50	34.80bb	28.00bb	34.00bb
Detroit	253.00	275.00	506.00	.....	616.00	704.00	44.00p	44.50p	38.00	30.00	.....
Kansas City	127.50	147.50	270.00	270.00	340.00	400.00	33.00	33.00	40.00	38.00	34.00
Los Angeles	r	r	r	r	r	r	30.50§	.....	34.00	34.00	36.00
Minneapolis	188.00p	210.00p	429.00p	216.00pe	.....	.....	43.00*p	52.50ii	45.50bbe	35.50bbe	47.50bbde
Montreal	170.00aq	178.00au	325.00au	270.00	400.00	.....	42.00	49.00	39.00	22.00	13.25m
New Orleans	186.00	186.00	380.00	380.00	.....	.....	40.00	55.00	44.00	32.00	32.00
New York	158.10h	158.60h	231.70ch	233.90kn	.....	.....	44.00	.....	37.00	35.00	.....
Philadelphia	156.30	166.80	312.70	375.20	.....	.....	30/34	34/40	27.60	25.60	3.17m
Pittsburgh	154.00	162.00	292.00	340.00	420.00	495.00	.....	.....	.....	.....	.....
St. Louis	179.00p	203.00p	358.00p	500.00p	.....	.....	43.00el	41.50s	0.95eaa	.80eaa	1.35ea
San Francisco	156.85*	177.10*	235.30dd*	.....	.....	.....	42.50*	42.50*	27.75	27.75	30.55i
Seattle	225.00p	250.00p	450.00p	250.00pw	.....	.....	43.00s	57.00s	52.00ebb	40.00bb	4.50mbb
Toronto	138.70	148.70	273.75	222.00f	.....	.....	25.00	63.00	36.00	33.50	31.00

*† F.o.b.yard Roxbury. *a Smooth. *b Per 50 lb. bags. *c 6 x 12 x 12 In.-3 cell. tax extra. *r Not used because of earthquake danger. *s 2% discount for cash. *t
*d Pulverized hot. *e 5%, 10th following month. *f 8 x 8 x 12. *g 5½ x 8 x 12. x 8 x 11¼. *u Tax exempt. *v Sand lime. *w 5 x 8 x 12. *y Stock
*h F.o.b. trucks, job site N.Y.C. *i 60# sacks. *j Truck load or over. *z Pebble lime price per 80 lb. sack. *aa Price per sack. Lime not sold per ton. *bb LCL
count. *l Red face. *m Per bbl., 180 lb. *n 7¾ x 7¾ x 12. Speed tile. *dd 6 x 12 x 12. *ee Pebble lime. *ff 80% common. *gg Rough. $40.00 Smooth
*o mason's double hydrated pressure. *p Truck lots. *q Provincial and Municipal *ii Chi common. § F.o.b. yard. **F.o.b. plant Stockton.

PAINT, ROOFING—F.O.B. CARLOAD LOTS

	RED LEAD Per 100 lb. in 600-lb. (Approx.) bbl. Dry a	WHITE LEAD Per 100 lb. in 100 lb. cases In oil w	READY-MIXED PAINT Per gal., drums Graphite b	Aluminum c	Ferric Oxide d	ROOFING SUPPLIES; Carload lots f.o.b. factory— Rolls, slate surfaced, 85–90 lb. per sq.	Asphalt felt, per 100 lb.	Tar felt, per 100 lb.	Asphalt coating per gal.	Tar pitch 350 lb. bbl. per ton
Atlanta	$19.25	$22.275	$3.59	$3.86	$3.31	$3.39	$2.20	$2.62	$0.67	$37.75
Baltimore	19.00	27.00	2.78	4.25	3.35	2.78	4.25	4.25	.48	50.18
Birmingham	19.25	28.275	3.90	3.40	....	3.31	2.51ii	2.51ii	.87ff	48.00m
Boston	19.00	27.90	....	....	....	3.20gg	2.83eg	2.83eg	.50g	56.00g†
Chicago	19.00	27.90	....	....	....	3.45ta	2.86to	2.89to	45.50bbo	55.70†
Cincinnati	19.00	27.90	....	....	....	2.92	2.50	2.53	.618y	53.98
Cleveland	19.00	27.90	3.3829pgg	2.5895gg	2.8292gg	3.30q	2.54o	2.54o	.454y	47.00gg
Dallas	19.25	28.65	....	3.13B	....	3.00u	5.00o	3.00o	.464	65.00ss
Denver	19.50	28.40	3.29	5.15	3.04	3.11	2.30o	2.45o	.48ff	47.00
Detroit	19.00	27.90	3.36	3.25	2.50	3.30	2.54f	2.409f	.58‡ff	47.30
Kansas City	19.00	28.65	3.82	3.28	2.90	4.46ii	4.27o	4.27o	.71y	95.70
Los Angeles	19.00	28.15	3.30n	4.50n	4.20n	3.20n	2.15en	I	.70ny	I
Minneapolis	19.00	29.85/28.62	....	....	....	2.99dd	2.41kidd	2.41kidd	.442idd	48.80r
Montreal	.....	21.95	5.02Dft	5.04Eft	4.65Fft	5.40	4.65f	1.60	....	....
New Orleans	.....	.....	....	....	....	2.74	2.16	2.43	0.689	....
New York	19.00	27.90	....	....	....	3.15	2.43o	2.43o	.444s	48.00*
Philadelphia	19.00	27.90	3.60	3.40/3.65	3.60/4.60	2.75/3.00	2.94	2.94	.45	48.00
Pittsburgh	19.00	27.90	3.10	3.36	3.68	3.72	2.85e	2.85e	.42	53.78
St. Louis	19.00	27.90	....	....	....	3.70iis	3.95h	3.95h	.46y	54.54
San Francisco	19.00	28.15	3.05	4.25	3.50	2.69	2.09aa	3.10	.47jj	54.00
Seattle	19.00	28.40	3.47mcc	4.19mcc	....	3.72mqcc	3.22mcc	....	.50mcc	47.25cc
Toronto	.....	.....	....	....	....	4.45	4.10e	4.65o	1.70j	88.00d

*‡ Delivered. *Note: Red lead in oil 50¢ higher than white lead in oil. *a Red lead prices change frequently due to pig lead price changes. *b U. S. War Dept. Spec 3-49A. *c ASTM Spec. D266-31. *d 80% minimum ferric oxide. *e 15 lb. *f Per 432 sq. ft. *g F.o.b.yard, Roxbury. *h Per roll, 65 lb. *i Net carload lot prices: Minneapolis and vicinity. *j 45 gal containers. *k Per cwt, *l Not used. *m 1% discount for cash. *n F.o.b. city. *o Per 60-lb. roll. *p 6-drum, 50 gal. ea. *q Per 90-lb roll. * r F.o.b. factory, Chicago. *s Truckload. *t Federal tax included, add 5% mun. & prov. tax. *u Per 90-lb. square. *v Per ton. *w Price to contractors $1.25 less. *x Mineral surfaced. *y 55-gallon container. *z Drums. *aa 15 lb., 324 sq ft roll. *bb Red-ers coating and cement; Price per ton. *cc LCL, truck delivery. *dd 2% cash discount. *ee Asphalt pitch in 100 lb. package. *ff 5-gal. drums. *gg F.o.b. factory. *hh Incl freight. *ii Per roll. *jj Asbestos roof coating. *A 400 lb barrels. *B ASTM Spec D-982-49. *D Std. Black. *E Ready-mixed. *F Over 80% ferric oxide. ** Aver. wt. approx. 425 to 550 lbs. drums.

PLASTER, VERMICULITE AND METAL BUILDING SHEETS & TUBING

	PLASTER‡ Neat per ton	Gauging per ton	VERMICULITE‡ Home Insulation pellets	Plaster aggregate	Concrete Aggregate Untreated	PERLITE‡ Plaster Aggregate	Concrete Aggregate Untreated	ALUMINUM SHEETh† Flat .102" th 36"x96" & 48"x144" per lbjt	Corr roof .032" th 35"x12' per shu	STAINLESS STEEL† SHEET-TYPE 302g 20 ga 48"x96–120" per cwthh	28 ga 36"x120" per cwtmm	COPPER WATER* TUBING-TYPE L 2000 ft lots per ft ¾"b	⅛"c
			per bag of 4 cu ft										
Atlanta	$31.00	$36.00	$1.55e	$1.65e	$1.80el	$1.65	$1.65	$0.424n	$6.57n	$61.44n	$67.50n	$16.74f	$23.41f
Baltimore	22.85	33.25	0.95	1.15	1.15	1.15	1.65	0.391	0.427r	56.25	64.25	0.1951	0.2745
Birmingham	33.00	39.00	1.55	1.55	1.80l	1.55	1.55	0.471	10.02	62.26	70.76	0.2025	0.2464
Boston	22.00	30.00	1.40	1.40	1.45	1.45	1.50	0.505	28.56op	62.873dd	69.01ddff	0.1674	0.2341
Chicago	26.80	26.80	1.55	1.60	1.60l	1.50	1.50	0.474	9.905ap	62.65aee	71.15aee	0.1674	0.2341
Cincinnati	28.00*	28.00*	1.75	1.75	1.75	1.85	1.90	0.434	9.56	65.18	78.68ff	0.1668	0.2094
Cleveland	28.00	43.00	1.13ii	1.16ii	1.24l	1.45	1.45	0.44aa	8.66	65.08	73.58	17.64f	23.41f
Dallas	30.00	32.00	1.05	1.21	1.37l	1.21	1.37	0.379	0.439r	55.00	63.00	0.200i	0.2810
Denver	25.00	25.00	1.50	1.40	1.50	1.40	1.50	0.444	9.80	60.19gg	70.69gg	0.2006	0.2810
Detroit	25.00	25.00	1.28	1.32	1.41	1.45	1.45	0.455a	9.235a	65.00a	73.50a	16.74f	26.56f
Kansas City	30.00	35.00	1.25	1.35	1.50	1.40	1.60	0.451	10.95	67.14	75.81	18.99f	26.56f
Los Angeles	26.20	27.20	1.25ii	1.15k	1.25	....	....	0.484	9.96d	64.45	73.95	0.1899	0.2656
Minneapolis	32.00	32.00	1.50	1.60	1.80	1.40	1.40	0.481	....	65.46	78.96ff	0.1674	0.2341
Montreal	27.60	35.60	1.20	1.40	1.50	1.15e	1.15e	0.437	9.92	66.50	.....	0.228	0.287
New Orleans	32.00	45.00	1.25	1.25	1.35	1.25	1.25	0.422	8.303	62.04	70.54	0.1214	0.2705
New York	24.00	30.00	1.30	1.25	1.45	1.30	1.30	0.474ao	9.46ad	65.70	74.20	16.74f	23.41f
Philadelphia	23/25	32.00	1.35	1.35	1.40	....	....	26.50avz	7.50a	53.23a	60.98a	18.57f	26.09f
Pittsburgh	27.50	31.00	1.30	1.30	1.32	1.35	1.35	0.42	9.19	56.81	62.63	0.2045	0.2872
St. Louis	29.00	40.00	1.35	1.60jj	1.55	1.60	1.65	0.434	9.80	68.11	74.36	16.74fm	23.41fm
San Francisco	27.85	32.00	1.20	1.20	1.40	1.20	1.40	0.49	8.90	64.95	73.45	0.1674	0.2341
Seattle	40.00	43.00	1.45	1.25k	1.85l	1.50k	....	0.422	8.303	63.00	83.00	0.1674	0.2341
Toronto	28.50	45.50	1.20	1.30	1.45	....	....	0.4215	24.00ae	73.75	86.50	0.2835pp	0.3424pp

‡ trucklots, delivered † fob warehouse * fob city *a delivered *b ½" O.D. *c ⅝" O.D. *d 0.100"th *e 36" x 60" sheet *f per 100 ft *g 5 tons & up; cold roll, anneal & pickled 2B finish *h 15M lb lots *j 1100 & 3003 alloy, mill finish *k per bag of 3 cu ft *l treated with air entraining agent *m 2-10M ft *n fob mill, fr allow *o 5M lb & up *p 100 sq ft quantity *r per lb *s 30# bag *t 36" x 96;-10.81 lb/sh; 48" x 144"; 21.7 lb/sh *u 19.31 lb/sh *v fob plant *w 48" x 144" *x $13.25 per 36" x 96" sheet *aa 16M lb & o *dd add $0.75 cwt for boxing *ee 4 tons & up *ff 26 ga *gg add $2/cwt boxing; $0.75/cwt on skids *hh Theoretical wt for 48" x 96"; 60.4-lb, per sh. *ii 300-bag lots *jj per 100-bag *mm Theoretical wt: 19.7-lb per sh. *pp Incl 10% sales tax

This Booklet shows...

...how Transite Sewer Pipe saves in **4** important ways

Selecting the right pipe material for a new sewage system—or for additions to an existing one—is a problem of major importance to *all* concerned in influencing a choice. *And* it can be solved to *the complete satisfaction of both installer and user* with economies in each of these stages—(1) system design (2) installation (3) operation and (4) maintenance.

Engineers thinking in long-range terms of thoroughly proved sewer main performance . . . contractors interested in serving community needs at new lows in installed cost—both should know all about Transite® Pipe and the Ring-Tite® Coupling. Here is a new booklet that tells and shows how Transite Pipe reduces infiltration, keeps out roots; maintains high flow capacity; speeds installation; permits designing the system for savings. Send the coupon for it today.

Johns-Manville
TRANSITE SEWER PIPE
WITH THE **RING-TITE** COUPLING

Johns-Manville, Box 14, New York 16, N. Y.
Gentlemen—Please send me your new Transite Sewer Pipe Brochure, TR-165-A.

Name_____ Company_____

Street_____

City_____

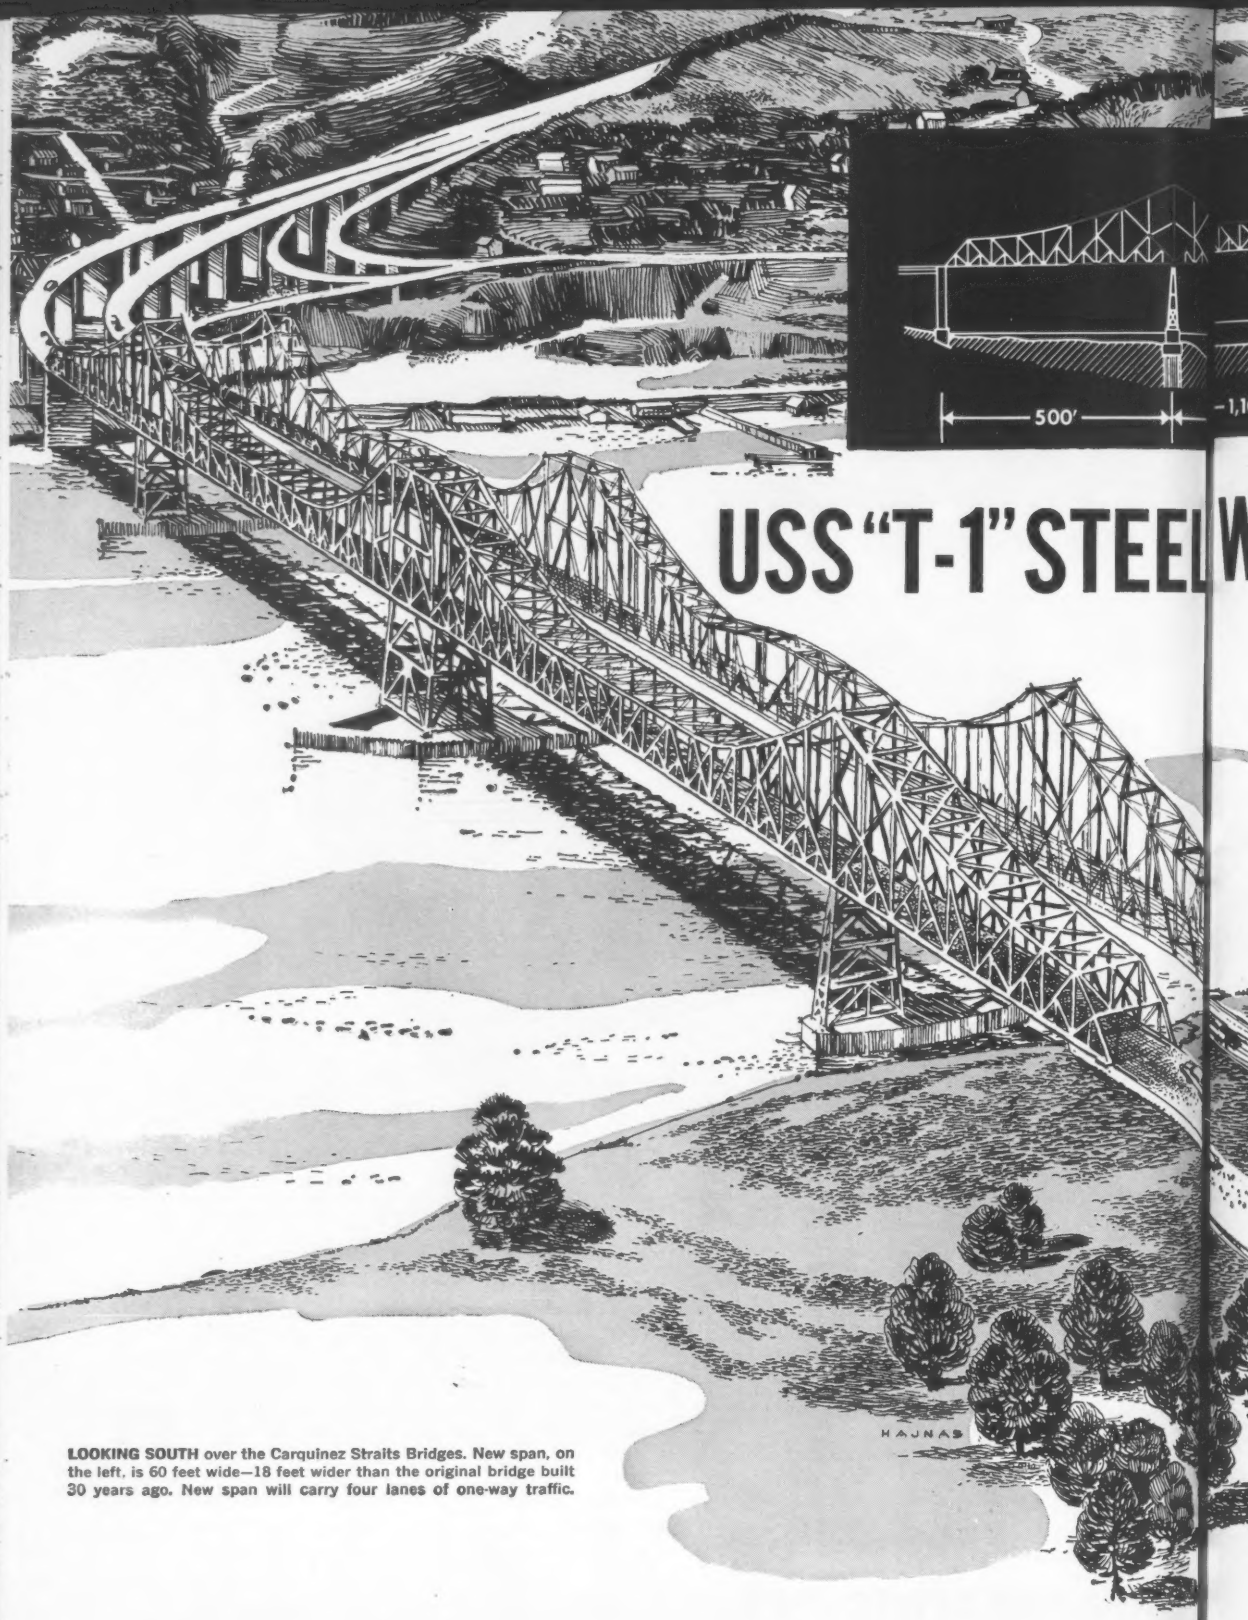

USS "T-1" STEEL W

LOOKING SOUTH over the Carquinez Straits Bridges. New span, on the left, is 60 feet wide—18 feet wider than the original bridge built 30 years ago. New span will carry four lanes of one-way traffic.

NEARLY 500 of the more than 1,000 gusset plates and 142 of the 664 truss members in the new bridge were made from USS "T-1" Steel. The weldability and very high strength of this remarkable alloy steel saved weight, time and money.

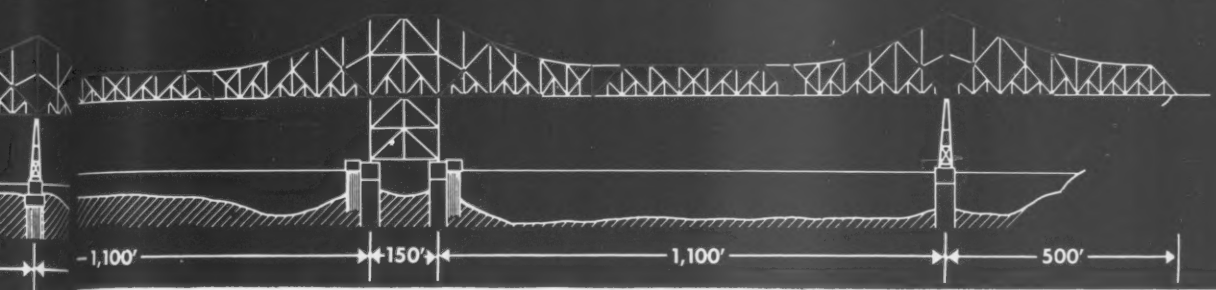

EEL WILL SAVE $800,000 IN FIRST MAJOR BRIDGE APPLICATION

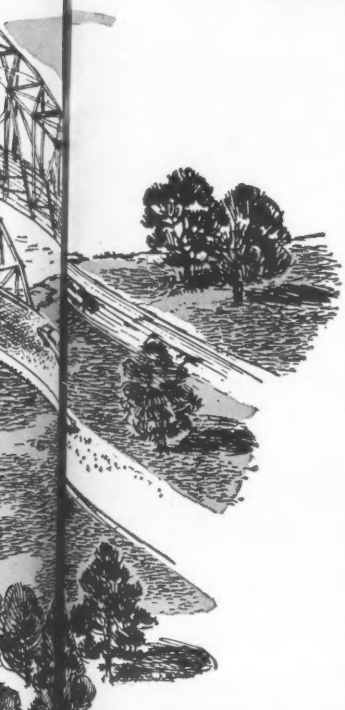

Next year the State of California will open a new toll bridge paralleling an existing structure across the Carquinez Straits. This will be the final step in a mammoth project underway to relocate some twelve and a half miles of very busy highway connecting the San Francisco Bay Area with the Sacramento Valley.

The new $20-million bridge will be unusual. While, in appearance, it is a near carbon copy of the present structure across the busy straits, it will employ some 2,900 tons of USS "T-1" Steel in its most highly stressed truss members. Of 664 members in the trusses, some 142 will be of welded construction and made of "T-1" Steel.

The weldability and 90,000 psi minimum yield strength of USS "T-1" Steel will dramatically simplify design and fabrication of critical members. Take one example, a lower chord member: In the new structure, it will be made from just five welded plates of "T-1" Steel and require 340 feet of 5/16" automatic fillet welds. But, had it been put together by stitch riveting, the method used in the original span, this same chord member would have required *eight* vertical plates, *four* angles, and *two* cover plates . . . plus *1,000* rivets and *3,600 punched and reamed holes!*

Besides ease of fabrication gained through welding, "T-1" Steel's tremendous strength permits big weight savings. For example: one of the top chord members of the new bridge will weigh 400 lbs. per ft. and have a section area of 117.19 sq. in. A structural carbon steel (ASTM A-7) member for the same location would weigh 996 lbs. per ft. and would require a section of 293 sq. in. Lighter, smaller members mean reduced moment of inertia and important reductions of secondary stresses.

According to design computations by the State of California, USS "T-1" Steel will save approximately $800,000 in building the new Carquinez Straits Bridge—the first major bridge application of this remarkable constructional alloy steel.

For More Information—Write on your company letterhead for our newly revised, comprehensive booklet entitled "T-1." You'll find in it a wealth of engineering and metallurgical data. Or, contact our nearest representative—you'll find him listed in the telephone directory under UNITED STATES STEEL.

UNITED STATES STEEL CORPORATION, PITTSBURGH • COLUMBIA-GENEVA STEEL DIVISION, SAN FRANCISCO
TENNESSEE COAL & IRON DIVISION, FAIRFIELD, ALA. • UNITED STATES STEEL SUPPLY DIVISION, WAREHOUSE DISTRIBUTORS, COAST-TO-COAST
UNITED STATES STEEL EXPORT COMPANY, NEW YORK

USS "T" CONSTRUCTIONAL ALLOY STEEL

"USS" and "T-1" are registered trademarks.

Watch the **United States Steel Hour** on TV every other Wednesday (10 p.m. Eastern time).

UNITED STATES STEEL

Bids Asked—Low Bidders—Contracts Awarded—First Section—

Compiled by Business News Department—Engineering News-Record, 330 W. 42nd St., New York 36, N. Y., ELSIE EAVES, Manager
J. A. MAHONEY, M. WETZEL, M. E. SCIORRA, F. S. DEMBEK, Reports.
J. H. WEBBER, M. R. ROESSLER, E. R. HUBER, Statistics.

NEW ENGLAND

HEAVY CONSTRUCTION—BA

† **Conn., Groton**—PIPING REPAIRS—BA 4/30—U. S. Naval Submarine Base, Officer in Charge of Constr., New London, service piping repairs, Grayling Ave. to Buildings 108 and 151 and Building No. 157 to Pier No. 17.

BUILDINGS—BA

Mass., Everett—SCHOOL—BA 5/3—St. Anthony's R. C. Parish, Rev. Peter Bartolazzo, Oak St., (selected list bidders), parochial school, Oak St. $350,000. Plans deposit $25. Lawrence J. Cuneo, 110 Pleasant St., Malden, archt. CD 1/14.

▲ **Conn., Vernon**—SCHOOL—BA 5/16—Town, School Bldg. Com., Vernon, Vernon High School. $2,000,000. Plans deposit $50. CD 6/8.

HEAVY CONSTRUCTION—LB & CA

▲† **Carlo Bianchi & Co., Inc.,** 24 Union Ave., Framingham, Mass. CA **$3,817,155.** Hoosic River Basin, North Adams Flood Control Proj., Unit No. 5, North Adams, CIVENG-30-075-57-11, MASSACHUSETTS. U. S. Eng., 111 E. 16 St., New York 3, N. Y. Bids Feb. 25, under LB.

Perini Corp., Marine Div., 62 Condor St., **East Boston,** Mass. LB **$227,900,** est. $224,000. (1 bidder) dredging basin area, Manchester Harbor, Manchester, MASSACHUSETTS. Commonwealth of Mass., Dpt. P. Wks., 100 Nashua St., Boston, Mass. Bids Apr. 9. CD 3/29.

Ralph Richard Co., 495 Whiting Ave., Dedham, Mass. LB **$413,140,** est. $322,139. constr. test embankment Rte. 107, U 261 (5) Revere, MASSACHUSETTS. Commonwealth of Mass., Dpt. P. Wks., 100 Nashua St., Boston, Mass. Bids Apr. 9. CD 4/2.

MASSACHUSETTS—Commonwealth of Mass., Dpt. P. Wks., 100 Nashua St., Boston,
Old Colony Constr. Co. of Quincy, P. O. Box 230, Quincy, Mass. CA **$848,448,** est. $988,376. hy. and bridge work, Rte. 138, U-344 (9), Randolph. CD 4/9, under LB.

MASSACHUSETTS—Commonwealth of Mass., Dpt. P. Wks., 100 Nashua St., Boston,
B. & M. Constr., Inc., P. O. Box 287, Hadley, Mass. LB **$133,230,** est. $137,885. hy. work north Elm and Locust Sts., Northampton. Bids Apr. 9. CD 3/27.

▲ **RHODE ISLAND**—State R. I. & Prov. Plants, Div. Purchase, State House, Providence,
Campanella & Cardi Constr. Co., 780 Jefferson Blvd., Warwick, R. I., LB **$1,820,818.** Contr. 5703, Bid 863, grading, drainage, 6.99 mi. Quaker Lane-Nooseneck Hill Rd., F. A. Proj. 1001 (15), Warwick, West Warwick, Greenwich and West Greenwich. Bids Apr. 10. CD 4/2.

CONNECTICUT—State Hy. Dpt., 165 Capitol Ave., Hartford, Bids opened 4/8,
Conn.—**E. T. O'Neill & Son Constr. Corp.,** P. O. Box 868, Holyoke, Mass., LB **$76,341.** (13 bidders) Proj. 55-78 single span composite rolled beam bridge over Salmon Brook approaches on Route 20, etc., Granby;
Conn.—**Bonvicini Bldg. Co., Inc.,** 1500 S. Main St., Torrington, Conn., LB **$76,469.** (7 bidders) Proj. 143-70, rein.-con. slab bridge square spans of 25 fr. over Gulf Stream, approaches on Route 25, Torrington. CD 3/22.

CONNECTICUT—State Hy. Dpt., State Office Bldg., Hartford, Bids opened 4/8,
Conn.—**Webster & Webster, Inc.,** 1366 Main St., East Hartford, Conn., LB **$562,295** (2 bidders) Proj. 314-07, guide railing median barrier railing and fencing on Conn. Turnpike, Milford, Orange, West Haven and New Haven;
Conn.—**National Fence Co., Inc.,** 33 S. Grove St., Meriden, Conn., LB **$194,978,** (2 bidders) Proj. 308-08, guide railing median barrier railing and fencing on Conn. Turnpike, Fairfield and Westport;
Conn.—**Angelo Tomasso, Inc.,** Warren St., New Britain, Conn., LB **$103,076.** (7 bidders) Proj. 37-67, b. conc. resurf. 7,425 lin. ft. Main St. Route 17, Durham. CD 3/22.

BUILDINGS—LB & CA

New London Hospital Md. Trustees, c/o Administrator, New London, N. H., rejected bids Mar. 20, HOSPITAL, NEW LONDON, N. H., LB **$757,675.** Will re-advertise. CD 3/27, under LB.

▲ **Holyoke Water Power Co.,** R. A. Barrett Jr., pres., 1 Canal St., Holyoke, Mass. Separate Contracts. Over **$30,000,000.** Smith's Ferry-O'Hares Grove Steam Generating POWER PLANT 137,500 kilowatts, HOLYOKE, MASS. Jackson & Moreland, Park Square Bldg., Boston, Mass., engrs. CD 9/7.

J. G. Roy & Sons Co., 21 Silver St., Springfield, Mass. CA **$250,000.** SHOWROOM and GARAGE, Main and Mill Sts., SPRINGFIELD, MASS. Sterling A. Orr, Inc., 125 Liberty St., Springfield, Mass. Bids Mar. 15. CD 3/7.

O. D. Purrington Co., Inc., 49 Westminster St., Providence, R. I. LB **$549,000.** ELEMENTARY SCHOOL, north of Griswold St., TURNERS FALLS, MASS. Town of Montague, Raymond George, chn. Elementary School Bldg. Comn., c/o Supt. Schools, Turners Falls, Mass. Bids Apr. 9. CD 3/20.

▲ **George A. Fuller Co.,** 597 Madison Ave., New York, N. Y. CA **$5,000,000,** rebuilding St. Joseph's CATHEDRAL, Farmington Ave., HARTFORD, CONN. Archdiocese of Hartford, Chancery Office, 140 Farmington Ave., Hartford, Conn. CD 1/11.

▲ **John Zandonella, Inc.,** 70 Chase St., Bridgeport, Conn., LB **$3,114,000.** HIGH SCHOOL, North Ave., WESTPORT, CONN. Town School Bldg. Comn., Jessup Rd., Westport, Conn. Bids Apr. 8. CD 3/15.

MIDDLE ATLANTIC

HEAVY CONSTRUCTION—BA

Del., Wilmington—BA 4/30—Levy Court, New Castle Co., Public Bldg., 11 and King Sts., Contract 1957-8. 2,550 ft. 8- to 15-in. terra cotta sanitary sewers in Mill Creek Hundred. Plans deposit $3. John I. Cahalan, engr. CD 11/10/55.

Pa., Phila.—TAXIWAY CONNECTION—BA 5/2—City, Dpt. Procurement, City Hall Annex, Bid No. 6579, taxiway connection T-8a between taxiway T-4 and Runway 15-33 and appurtenant work, Contr. A 140-NE, North Phila. Airport. CD 5/9.

Pa., Phila.—BA 5/2—City, Dpt. Procurement, City Hall Annex, grading, asph. paving, incl. constr. water mains, Haldeman Ave.; b. conc. paving asph. resurf., reconstr. traffic signal system, central business district, imprv. Walnut Lane, incl. grading, paving, bridge constr., sewers and water mains. CD 10/28/43.

N. Y., Rome—BA 5/6—Purch. Agent, City Hall, concrete masonry dam and accessories on east branch of Fish Creek, approx. 17 mi. northwest of city. Malcolm Pirnie Engineers, 25 W. 43 St., New York, Zone 36, engrs. CD 9/20.

† **Md., Andrews Air Force Base**—STORAGE ACILITIES—BA 5/7—U. S. Eng., First and Douglas Sts. N.W., Wash. 25, D. C., ammunition storage facilities, ADC type, ENG-49-080-57-80-(78). CD 4/4.

BUILDINGS—BA

Pa., West Chester—HOSPITAL—BA 5/1—Oakburne Colony Hospital, South Concord St., hospital dormitories addns., alterations, $344,000, Gibson & Kl… 117 S. 17 St., Phila., engrs. Martin, Stewart Noble, 117 S. 17 St., Phila., archts.

Pa., East Greenville—SCHOOL—BA 5/9—Upper Per… meen Joint School Bd., high school addn., gymnas… and athletic field, $830,000. Extended date, Wolf Hahn, 459 Hamilton St., Allentown, archts.-eng… CD 4/1.

▲ **N. J., Asbury Park**—HOUSING—BA 5/11—Ash… Park Housing Auth., Washington Ave., 63 housing u… on Lincoln Place and West Lake Ave. $1,000,0… Barnett Singer, 15 Benmore Terrace, Bayonne, arc… CD 9/17.

▲ **Del., Newark**—SCHOOL—BA 5/15—Newark Spec… school Dist., Newark, Ogletown Elementary Scho… $1,480,000. E. William Martin, 830 West St., W… mington, archt.

▲ **Del., Stanton**—SCHOOL—BA 8/14—Stanton Sch… Dist. Stanton, Junior High School, $1,000,0… Whiteside, Moeckel & Carbonell, 909 Tatnall … Wilmington, archts. CD 2/28/56.

HEAVY CONSTRUCTION—LB & CA

† **General Electric Co.,** 1 River Rd., Schenectad… N. Y. LB **$81,126.** (7 bidders) design, m… furnishing, 30 high voltage disconnecting switch… and appurtenance for Barnhart-Plattsburgh tra… mission proj., Contr. No. TP 5, NEW YORK. T… Power Authority of the State of New York, 2… Broadway, New York, N. Y. Bids Apr. 2. CD 3/7

▲ **NEW YORK**—John W. Johnson, supt. Dpt. P. Wo… The Gov. Alfred E. Smith State Office Bldg., Alban…

N. Y.—**Troy Slag Products Co., Inc.,** foot of Moor… St., Troy, N. Y. CA **$537,865.** De-Kalb Junctio… Rensselaer Falls (Town Rd.) 5.94 mi., FASS 57-… St. Lawrence Co. CD 3/6, under LB;

N. Y.—**Ardor & Booth, Inc.,** 1130 Water St., Waterto… N. Y. CA **$520,544.** relocation, reconstr. 1.02 m… Sect. Rte. 11, bypassing to the north of present Ma… and Antwerp St.; route through Phila. starting … Church St. in Phila., extending northeastward alo… the same alignment, then on new alignment across … new 168 ft. long bridge over Indian River, FA… 57-12, Jefferson Co.;

N. Y.—**Bero Constr. Corp.,** 259 Delaware Ave., Buffa… N. Y. CA **$6,441,677.** constr. 1.24 mi. six-la… portion of State Thruway's Niagara Section in Buffa… four railroad lines grade separation structures … Smith St., Van Rensselaer St. and Hamburg St. a… two other overpasses over railroads, Erie Co.;

N. Y.—**Potter-DeWitt Corp.,** Pavilion, N. Y. CA $597,… 670. wid'n., reconstr. Hunt Rd. (County Rd. … from Jamestown's west city line westward to Coun… Rd. 75 distance 4.26 mi., Chautauqua Co. Gra… total $8,096,756. CD 3/1, under LB.

▲ **NEW YORK**—John W. Johnson, supt. Dpt. P. Wo… The Gov. Alfred E. Smith State Office Bldg., Alban…

N. Y.—**Massachusetts Northern Constr. Corp.,** 588 E… sex St., Lawrence, Mass. CA **$2,749,975.** const… seven span 840 ft. long welded plate girder brid… and approaches with interchange facilities over Gra… River in Massena connecting Center St. with Park… Ave. involving 1.24 mi., St. Lawrence Co.

N. Y.—**Bates & Rogers Constr. Corp.,** 600 W. Jackso… Blvd., Chicago, Ill., CA **$1,490,000.** elimination … grade crossing between Porter Ave. the N. Y. Cent… R.R. and State Thruway Niagara Sect. in Buffalo… Porter Ave. carried over railroad tracks and Throu… involving 2.84 mi., Erie Co. CD 3/1, under LB.

NEW JERSEY—State Hy. Auth., 12 Broad St., … Bank,

M. J. Stavolax, Inc., P. O. Box 482, Red Bank, N. … CA **$342,723.** imprv. southbound roadway … shoulder stabilization from Raritan River to Keyp… in Matawan Boro, Matawan Twp., Madison Tw… and Boro of Sayreville, Sayerville. Bids Mar. 2… CD 3/4.

Croft Constr. Co., Brace Rd. Haddonfield, N. J. … **$286,000.** water main exten., Evergreen Ave., et… HADDONFIELD, N. J. Boro, Haddonfield, N. … Walter H. MacNamara, 822 Federal St., Camde… N. J., engr.

▲ **Joseph L. Muscarelle, Inc.,** Rte. 17 and Essex St… Maywood, N. J. CA **$1,383,257** (8 bidders) const… pavements and utilities for 3 transit sheds, (Bldg… Nos. 290, 291 and 292) on north side of city chann… at Port Newark, Contr. PN-340.008, PORT NEWARK… N. J. Port of New York Auth., 111 Eighth Ave., … York 11, N. Y. CD 3/22, under LB.

Reisinger Bros., Inc., E. North Street Extended, Carlis… Pa. LB **$889,000** (4 bidders) Contr. No. 1, gene… constr. sewage treatment work, CARLISLE, PA. … Sewer System Auth., Boro Hall, Carlisle, Pa. … Apr. 9. CD 3/18.

Joseph Lombardi & Sons, 1311 S. Broad St., Phila. … Pa. CA **$777,612.** Bid 2770, reconstr. sewers … Christian St., incl. relay of water mains, PHILA., … City, Dpt. Procurement, City Hall Annex, Phila., … CD 4/15, under LB.

† **Somers Constr. Co.,** Bala Cynwyd, Pa. LB $304,7… auxiliary bldg. at Naval Air Material Center, … 11552, PHILA., PA. Dpt. Navy, Phila. Naval … Phila., Pa.

Joseph Lombardi & Sons, 1311 S. Broad St., Phila. … Pa. LB **$777,622.** Sewers Bid 2770, PHILA., …

(Continued on Page 110)

PROJECTS COVERED

By Size

Construction projects here reported cover the United States and Canada, are of these minimum sizes or larger: water supply, earthwork, waterways $44,000; other public works $73,000; industrial buildings $93,000; other buildings $344,000. Also Foreign projects of $100,000 and more in size of interest to American contractors.

By Regions & Classes of Construction

(In order of Listing)

BIDS ASKED
LOW BIDDERS
CONTRACTS AWARDED

New England	**Middle West**
Middle Atlantic	**West of Mississippi**
South	**Far West**

PROPOSED WORK

Water Supply	**Public Buildings**
Sewers, Waste Disposal	**Mass Housing**
Bridges	**Commercial Buildings**
Streets & Roads	**Industrial Buildings**
Earthwork, Waterways	**Unclassified**

In These Stages

PROPOSED WORK: Before and including appointment of engineers or architects.
BIDS ASKED: BA (new announcements only). For full calendar, see also preceding issues.
SOON LETS CONTRACT: SLC
LOW BIDDERS: LB On jobs below $500,000 in value all low bidder news will be the final reports published on the projects involved except where award is not made to the low bidder. In this case, a supplementary contract award report will be published.
CONTRACTS AWARDED: CA Except awards to low bidders previously reported in low bidder stage.
CD dates shown are of Construction Daily issue in which last previous report was published.
OWNERS, ENGINEERS, ARCHITECTS, CONTRACTORS are invited to report their new jobs for listing in these reports when they meet or exceed the size minimums shown above. Address these news releases to J. A. Mahoney, REPORTS, ENGINEERING NEWS-RECORD, 330 W. 42 St., New York 36, N. Y.

Symbols and Abbreviations Include:

†	Federal Government
▲	Project of $1,000,000 or over.
ENR	Engineering News-Record
CD	Construction Daily

For additional reports see Construction Daily.

"WE CONSIDER BLAW-KNOX STEEL STREET FORMS IN THE TOP BRACKET OF OUR BEST INVESTMENTS"

HUGH MURRAY LIMITED

Successful use of Blaw-Knox Steel Curb, Curb and Gutter Forms caused Hugh Murray Limited of Belleville, Ontario to make the following statement: "*They have seen considerable service yet, with a little care, have remained in perfect condition. A cost analysis conducted into the various methods and materials used in similar cases proved the value of Blaw-Knox forms.*" After one job you will be convinced that Blaw-Knox are your best investment, too. One "Complete Package" of these forms handles every concrete curb, curb and gutter, integral curb or sidewalk job from simple straight work to curved and serpentine shapes. They are standardized and completely interchangeable so you can do the most work with the smallest investment in forms. These forms are fast and easy to set or strip, and practically eliminate hand finishing. The need for expensive carpentry and costly single-use materials is eliminated, too.

The forms shown at right are but a few of the many types available—for complete information see Bulletin 2259-R. Your nearest dealer has it or you can write direct to Blaw-Knox for it.



SAVE ON ROAD FORMS

Self-aligning road forms save time and materials on highway and airport paving, too. They will assure rapid form setting that is always true to line and grade. Road forms are available in heights of 6" or more and Airport forms in heights of 12" or more.

BLAW-KNOX



Curb and Gutter Forms



Curb and Gutter Forms



Curb Forms, vertical back and face



Curb Forms vertical back with battered face



Curb Forms, battered exposed face



Integral Curb Forms



Fixed Radius Forms



Flexible Radius Forms



Sidewalk Forms



Curb Forms

BLAW-KNOX COMPANY

CONSTRUCTION EQUIPMENT DIVISION

41 Charleston Ave., Mattoon, Illinois

(Continued from page 108)

City, Dpt. Procurement, City Hall Annex, Phila., Pa. Bids Apr. 2. CD 3/21.

▲ **McLean Contg. Co.,** Fidelity Bldg., Baltimore, Md. CA Total est. $4,000,000. substructure and foundation 1 story, steel, concrete fruit pier, BALTIMORE, MD. Baltimore & Ohio R.R. Co., K. J. Wagoner, ch. engr., 2 N. Charles St., Baltimore 1, Md. CD 7/20.

BUILDINGS—LB & CA

▲ **Southcrest Homes,** c/o Charles Wood, archt., 630 Broadway, Amityivlie, N. Y. Owner Builds. $3,000,000. 225 HOUSES, Southern State Parkway and Deer Park Ave., BABYLON, N. Y.

▲ **Oakwood Homes,** c/o Stanley H. Klein, archt., 89-31 161 St., Jamaica, N. Y. Owner Builds. $13,000,000 750 HOUSES on tract on Park Ave. south of Merrick Rd., BALDWIN, N. Y.

▲ **Colmar Constr. Co.,** 364 Gold St., Brooklyn 1, N. Y. CA $3,831,000. general constr. Sheepshead Bay HIGH SCHOOL, Batchelder and Coyle Sts., Aves. X and Y, BROOKLYN, N. Y. Director, Bureau Constr., 42-15 Crescent St., Long Island City 1, N. Y. Bids Feb. 28, awarded Mar. 21. CD 3/4, under LB.

Teller Paving & Contg. Corp., 389 E. 167 St., New York, 56, N. Y. LB $343,984. (4 bidders) streets and yards imprvs. for Linden Houses (Proj. No. NYC-23) in area bounded generally by Cozine Ave., Schenck Ave., Stanley Ave. and Vermont St., BROOKLYN, N. Y. New York City Transit Auth., 299 Broadway, New York 7, N. Y. Bids Apr. 10. CD 3/26.

▲ **LeCesse Constr. Co.,** 1515 Lyell St., Rochester, N. Y. CA $1,938,000. HIGH SCHOOL, BUS GARAGE, FAIRPORT, N. Y. Bd. Educ., Fairport, N. Y. Bids Mar. 27. CD 3/12.

▲ **Orchard Park Homes,** c/o Lane Realty, 107-40 Queens Blvd., Forest Hills, N. Y. Owner Builds. $640,000. 40 HOUSES, 96 St. between 161 and 162 Sts., $640,000. 50 HOUSES, 96 St., HOWARD BEACH, N. Y.

▲ **Park Ridge Homes,** c/o Henry A. Kiar, 220-02 Horace Harding Blvd., Bayside Hills, N. Y. Owner Builds. $1,000,000. 60 HOUSES at 225 St. and 144 Ave., LAURELTON, N. Y.

▲ **James J. Waters Constr. Co.,** 415 Lexington Ave., New York, N. Y. CA $2,414,000. HIGH SCHOOL and BUS GARAGE, MASSENA, N. Y. Massena Central School Dist., No. 1, Massena, N. Y. CD 4/12, under LB.

Grace Terrace Estates, c/o Lane Realty, 107-40 Queens Blvd., Forest Hills, N. Y. Owner Builds. $800,000. 47 HOUSES, Laconia Ave. between 219 and 220 Sts., NEW YORK, N. Y.

▲ **Wilaka Constr. Co., Inc.,** 11 E. 44 St., New York 17, N. Y. CA Est. $2,000,000. 8 story HOSPITAL on block bounded by 210 St., Steuben Ave., Gun Hill Rd. and Bainbridge Ave., NEW YORK, N. Y. Montefiore Hospital, 100 E. Gun Hill Rd., New York 67, N. Y. CD 8/30.

Cherry Hill Homes, c/o Butterly & Green, Inc., 168-2 Hillside Ave., Jamaica, N. Y. Owner Builds. $450,000 15 HOUSES, Cold Spring Rd., SYOSSET, N. Y.

Flanigen & Hallman, Avalon, N. J. Separate Contract $344,000. RESIDENTIAL DEVELOPMENT, 20 uni Boat Basin, Bulkheads and utilities, AVALON, N. William H. Flanigen, 3430 First Ave., Avalon, N. archt.

▲ **Riverside Estates,** c/o Brunell & Kramer, 1201 Grand St., Elizabeth, N. J. Owner Builds. $1,600,00 79 HOUSES, Park Ave., BERKELEY HEIGHTS, N. Harry Maslow, 275 Morris Ave., Elizabeth, N. archt.

Woodcrest Shopping Center, c/o Murray Realty C 1616 Walnut St., Phila., Pa. Separate Contrac $344,000. SHOPPING CENTER, 25 stores, HA DONFIELD, N. J. Dante D'Anastasio, 1815 Fede St., Camden, N. J., arct.

George W. Shaner & Sons, Palmyra, N. J. CA $689,8 general constr. addn. and separate GYMNASIUM Rancocas Valley Regional HIGH SCHOOL, MOU HOLLY, N. J. Rancocas Valley Regional High Sch Bd. Educ., Mount Holly, N. J. Bids Mar. 26, award Apr. 10 CD 3/13.

Lauter Constr. Co., 112 S. 16 St., Phila., Pa. $147,728. MANUFACTURING BLDG. addn., EASTO PA. Victor Balata & Textile Belting, Easton, Anker & Schick, 1631 Cloverly Rd., Jenkintow Pa., archts.-engrs.

E. Carol Fesmire, 308 York St., Jenkintown, CA $100,000. AUTO SALES and SERVICE BLD GLENSIDE, PA. John H. Fassit Sr., 5 Norm Lane, Chestnut Hill, Phila., Pa. Kneedler Mir & Zantzinger, 12 S. 12 St., Phila.. Pa., arch George C. Lewis & Assocs., 1422 Chestnut S Phila., Pa., engrs.

Baton Const. Corp., 1717 Sansom St., Phila., CA $250,000. 1 story, steel, block, 70,000 sq. FACTORY, MIQUON, PA. W. C. Hamilton & So Miquon, Pa. H. M. Wilson, 18 and Brandywine St Phila., Pa., engr.

▲ **F. H. McGraw & Co.,** 51 E. 42 St., New York 1 N. Y. CA Over $2,000,000. design and construct s stand (30 in.) BILLET MILL and auxiliary equipme MONESSEN, PA. Pittsburgh Steel Co., Grant Bld Pittsburgh, Pa.

University of Pennsylvania Corp., College Hall, 34 a Woodland Ave., Phila., Pa., rejected bids Mar. 2 Moore School Electrical Engineering addn., PHILA PA. Will re-advertise. CD 3/19.

Tabone & Barbera, 185 N. Main St., Pittston, P CA $600,000. SCHOOL and OFFICE, BOILER PLAN parking area, SCRANTON, PA. International Tex book Co., Wyoming Ave. and Ash St., Scranto Pa. George Lewis, 445 Kressler Court, Scranto Pa., archt.-engr.

▲ **United Constr. Co.,** 1204 Lincoln Ave., Pittsburgh Pa. LB $1,259,000. JUNIOR SENIOR HIGH SCHOO SPRINGDALE, Pa. Allegheny Valley Joint School Dist Springdale, Pa. Bids Mar. 27. CD 3/25.

▲ **Charles H. Tompkins Co.,** 907 16 St. N.W., Wash D. C. CA $1,075,000. 5 story OFFICE, 608 13 S N.W., WASH., D. C. First Federal Savings & Loa Assn., 608 13 St. N.W., Wash., D. C. CD 4/2 under LB.

Davis & Platt Co., 401 Butternut St. N. W., Wash D. C. CA Est.. $750,000. 2 story masonr MOTEL, 1917 Bladensburg Rd., N. E., WASH D. C. Goldrocks Co., 201 K St. N. W., Wash., D. C Donald H. Drayer, 1717 20 St. N. W. Wash., D. C archt.

DUMPCRETES handle concrete for DALLAS MEMORIAL AUDITORIUM

R. P. Farnsworth & Company, Inc., of New Orleans handled construction of the huge $7,500,000 auditorium occupying 26 acres in downtown Dallas. Cantilever design and engineering by George L. Dahl of Dallas. Dumpcretes hauled 36,000 cu. yds. of concrete from job-site plant to crane buckets for high level pours, and to buggies or forms for slabs and pavement.

SEND COUPON FOR FACT-FILLED FIELD REPORT ON THIS JOB

Dumpcretes can reduce:

Capital investment in equipment • Confusion at paving site • Downtime and labor costs • Wide shoulder maintenance.

Dumpcretes can give you:

Lower operating costs • *Flexible* delivery to paving site *and* structures • Closer quality control • Better production.

MAXON CONSTRUCTION COMPANY, INC.
Manufacturing Division 10
2600 Far Hills Building, Dayton 9, Ohio

Please send me new Dumpcrete Field Report.

NAME_____

TITLE_____

FIRM_____

ADDRESS_____

CITY_____ ZONE___ STATE_____

SOUTH

HEAVY CONSTRUCTION—BA

† **Va., Chincoteague**—SHOP—BA 4/29—Dist. P. Wks. Office, Fifth Naval Dist., Bldg. N-26. U. S. Naval Base, Norfolk, jet engine maintenance shop Naval Air Station, NBy-7707, Spec. 7707/56.

HEAVY CONSTRUCTION—LB & CA

▲ **GEORGIA**—State Hy. Dpt., Atlanta,

Ga.—**Ballenger Paving Co.,** Paris, S. C. CA $1,086,181. wid'n., reconstr. and resurg. wid'n. 3 bridges, 7 new bridges 10.778 mi. Homersville-Waycross Rd. F-0037-3 (2) Clinch and Ware Counties;

Ga.—**C. A. Rutledge Constr. Co., Inc.,** Winder, Ga. CA $147,273. grading, paving 1 bridge 2.87 mi. Monroe-Eastville Road, S-1049 (3) Walton and Oconee Counties;

Ga.—**W. L. Cobb Constr. Co.,** 388 E. Ponce de Leon Ave., Atlanta, Ga. CA $150,137. grading, paving and 1 bridge 3.42 mi. Welmyer-Walker County Line Road, RR PR 1496 (2) Chattooga Co.;

Ga.—**Swanee Timber Co.,** Swanee, Ga. CA $91,619. grading, paving 1 bridge 4.329 mi. State Rte. 135 Lowdes Co. Line Rd. RR PR 2512 (1), Lanier Co.;

Ga.—**Kennedy Constr. Co.,** Box 266 Ashburn, Ga. CA $84,082. paving 2 bridges 7.454 mi. Irwinville-Chula Rd, RR-PR 2224-A (1) and 2224-B (1) Tift and Irwin Counties;

Ga.—**W. T. Anderson, Inc.,** Thomson, Ga. CA $178,899. grading, paving, 2 bridges 5.333 mi. State Rte. 16-Casons Academy-State Rte. 16 Road, RR Pr 2538 (1), Warren Co.;

Ga.—**Hugh Steele Constr. Co.,** Centre, Ala. CA $2,745,949. grading, paving, 1 grade separation structure, 1 double bridge 7.395 mi. Atlanta-Greenville S. C. Road, IN 403-2 (2) Gwinnett Co. CD 3/28, under LB;

Ga.—**Saunders & Perkins,** Newington, Ga. CA $98,713. road work RR-PR 1828 (2) Liberty Co. Grand total $4,582,853.

† **Robert E. Lee & Co.,** Manning, S. C., LB $532,986. Canal 18, Section 1 and Structure 46, Central and

Southern Florida Flood Control Proj., CIVENG-08-123-57-66, FLORIDA. U. S. Eng., Box 4970, Jacksonville, Fla. Bids Apr. 9. CD 3/13.

▲ FLORIDA—State Road Dpt., Tallahassee,

Cone Bros. Constr. Co., Box 1301, Tampa, Fla., CA $1,117,780, one 180 ft. concrete slab deck bridge on concrete piling bents, two box culverts, small drainage structures, limerock base with b. conc. surf. course 9.446 mi. SR 710, Job 9331-101, Palm Beach Co. Bids Feb. 12. CD 2/18, under LB.

Thomas D. Nolan, 1450 N.E. 130 St., North Miami, Fla., LB $824,718, Proj. 2, utilities, imprvs. gravity sewers exten., HOLLYWOOD, FLA. City Comm., C. W. Watson, city mgr., City Hall, Hollywood, Fla. Bids Apr. 9. CD 4/1.

State Dpt. P. Wks., State Capitol, Baton Rouge, La., cancelled bids to have been opened Mar. 18, Castor Creek Dam and Spillway Approx. 2 mi. northwest of Olla, LaSalle Parish, LOUISIANA. CD 3/12.

Rocco Ferrera & Co., 30105 W. 8 Mile Rd., Livonia, Mich. LB $922,300 (7 bidders) Ohio River Interceptor Sewer, Contr. 226B, 4,500 ft. 8 ft. concrete sewer, LOUISVILLE, KY. Metropolitan Sewer Dist., 412 W. Market St., Louisville, Ky. Bids Apr. 11. CD 3/26.

W. D. Rommel Co., 1449 Hugh Ave., Louisville, Ky. CA $814,222. general constr. 2 clarifier basins, Crescent Hill Plant, LOUISVILLE, KY. Louisville Water Co., 431 S. Third St., Louisville, Ky. Bids Mar. 26, awarded Apr. 9. CD 4/1, under LB.

Empire Gas Eng. Co., 7 Baltimore Pl., Atlanta, Ga. LB $356,250. Bid Item No. 1, fuel storage, U. S. Naval Air Station, NBy 10288, Spec. 10288/57, MEMPHIS, TENN. Dist. P. Wks. Office, Bldg. No. 13, U. S. Naval Base, Charleston, S. C. Bids Mar. 19. CD 2/14.

BUILDINGS—LB & CA

▲ John McShain, Inc., 3501 Sinclair Lane, Baltimore, Md., LB $13,172,000. 400-bed TEACHING HOSPITAL, W. Va. University's Medical Center, MORGANTOWN, W. VA. Bd. Governors, West Virginia University, Admin. Bldg., Morgantown, W. Va. Bids Apr. 10. CD 2/26.

▲ Robert L. Turchin, Inc., 1835 Purdy Ave., Miami Beach, Fla., LB $2,686,000. Base Bid, 302-room Beau Rivage HOTEL, Collins and 99 Sts., BAL HABOUR VILLAGE, FLA. Corporation, c/o Melvin Grossman, archt., 311 Lincoln Rd., Miami Beach, Fla. Bids Apr. 5. CD 4/3.

J. B. Mouton & Sons, Lafayette, La. LB $526,637 (3 bidders) CHURCH, LAFAYETTE, LA. Our Lady of Fatima Catholic Church, Rev. Michael J. Benedict, pastor, Lafayette, La. Bids Mar. 26. CD 3/12.

Louisiana-Mississippi Pipe Line Constr. Corp., and St. Francisville Constr. Co., 503 N. Foster Dr., Baton Rouge, La. CA $600,000. grading, clearing site for PAPER MILL, ST. FRANCISVILLE, LA. St. Francisville Paper Co., St. Francisville, La. CD 1/7.

▲ Virginia Engineering Co., Inc., 80 29 St., Newport News, Va. LB $6,412,000. (5 bidders) Southwick HOUSING, LOUISVILLE, KY. Louisville Municipal Housing Comn., Second and York Sts., Louisville, Ky. Bids Apr. 11. CD 3/13.

Newport Municipal Housing Comn., Fourth and York Sts., Newport, Ky., rejected bids Mar. 28, 50 HOUSING UNITS, NEWPORT, KY. LB $604,698. CD 4/8, under LB.

MIDDLE WEST

HEAVY CONSTRUCTION—BA

▲ ILLINOIS—5/2—Illinois State Toll Hy. Comn., 20 N. Wacker Dr., Chicago,

Contr. T-1-C—grading, draining, paving, appurts., bridges 5 mi. near Wood Blvd. extending westerly to Chicago Rock Island & Pacific right of way, $4,800,000. Sverdrup & Parcel, Inc., 1134 Locust St., St. Louis 1, Mo., sect. engrs.

Contr. T-9-B—grading, draining, paving, appurts., erecting precast concrete bridges 2.1 mi from Busse Hy. extending northerly to Golf Rd., $1,850,000. H. W. Lochner & Co., 150 N. Wacker Dr., Chicago, Ill., sect. engrs.

Contr. T-9-A—grading, draining, paving, appurts., erecting precast and stab. bridges, 2.29 mi. beginning near Touhy Ave. and extending northerly to Busse Hy., $2,000,000. H. W. Lochner & Co., 150 N. Wacker Dr., Chicago, Ill., sect. engrs. CD 5/11/56.

Mich., Detroit—BA 5/2—Huron-Clinton Metropolitan Auth., 1750 Guardian Bldg., Detroit, sewer and water facilities, 6,590 ft. 10 in. vitr. pipe sewer, 30 ft. 10 in. c.i. sewer, 225 ft. 10 in. c.i. river crossing, 490 ft. 8 in. vitr. pipe sewer, 390 ft. 12 in. rein.-con., 2,575 ft. 6 in. c.i. force main, 10,895 ft. 6 and 8 in. c.i. water mains, six 8 in. gate wells, 1 meter chamber, Hubbell, Roth & Clark, Inc., 954 N. Hunter Blvd., Birmingham, engr.

Mich., Lapeer—BA 5/6—City, Howard Gohlke, clk., Contr. No. 1, intercepting sewers, Sect. A, 3,507 lin. ft. 10- to 15-in. interceptor, 400 ft. 10 and 12 in. c.i. main; Sect. B, 5,711 ft. 12- to 18-in. sewer. Plans deposit $10 refundable; Contr. No. 2, sewage disposal plant treatment facilities, two sewage pumping stations. Plans deposit $25, refundable. McNamee, Porter & Seeley, 2223 Packard Rd., Ann Arbor, engrs. CD 8/23.

BUILDINGS—BA

▲ O., Cincinnati—PARKING GARAGE—BA 4/30—City, City Hall, converting 7 story Gibson Art Bldg. into parking garage, 4 and Plum Sts. $1,000,000. Plans deposit $20. Extended date. CD 3/29.

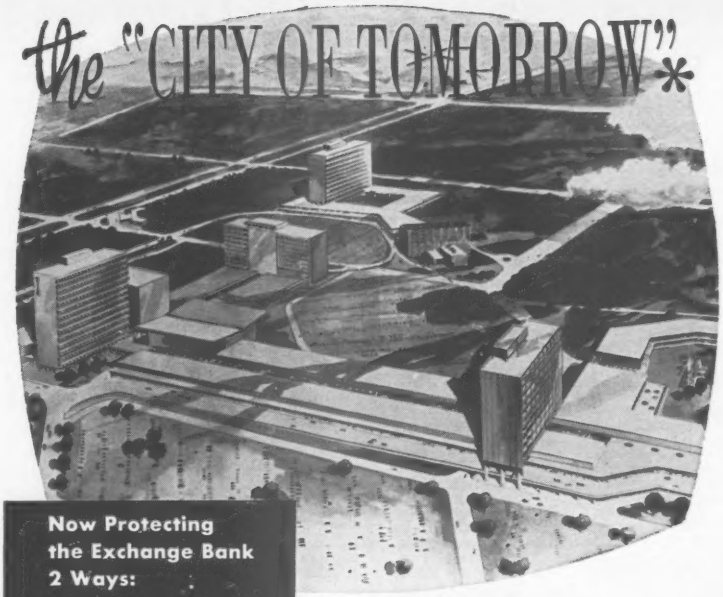



Sealing Around Mullion and Sill Joint in an aluminum-porcelain window wall.

Sealing Horizontal and Vertical Expansion Joints between cast stone and panels.

. . . and soon to protect the Braniff Building

*DALLAS EXCHANGE PARK
Architects, Engineers and Site Planners:
Lane, Gamble & Associates

. . . protected TODAY with PRESSTITE No. 1175.1 POLYSULFIDE-BASE SEALING COMPOUND

This development, right in the heart of Dallas, will cover 120 acres, provide a total of 2,394,065 sq. ft. of usable floor space, and have a normal occupancy of about 25,000 persons.

In addition to four office buildings, the community will include a 1000-guest room hotel, medical research center, maintenance building, major department store and 100 retail shops.

WANT MORE INFORMATION ?

Write for Free Users Manual

see our catalog in Sweet's ARCHITECTURAL FILE or write for copy

PRESSTITE Sealing Compounds
PRESSTITE - KEYSTONE ENGINEERING PRODUCTS COMPANY
A DIVISION OF AMERICAN-MARIETTA COMPANY
3784 CHOUTEAU AVE. ST. LOUIS 10, MO.

▲ **O., Columbus**—HOSPITAL WING—BA 4/30—Ohio State Dpt. P. Wks., State Office Bldg., hospital wing, Ohio State University, $3,000,000. Plans deposit $25. Garfield, Harris, Robinson & Schafer, 1740 E. 12 St., Cleveland, Zone 14, archts. CD 6/19.

Wis., Hartford—HOSPITAL—BA 5/1—St. Joseph Hospital, 1032 East Summer St., 3 story hospital. $600,000. Foeller, Schober, Berners, Safford & Jahn, 310 Pine St., Green Bay, archts. CD 3/21/56.

▲ **O., Cleveland**—HOSPITAL—BA 5/10—Mount Sinai Hospital, 1800 E. 105 St., Zone 6, 10 story hospital addn. $5,000,000. Plans deposit $60. Dalton & Dalton, The Arcade, Zone 14, archts. CD 9/30/55.

BUILDINGS—SLC

▲ **Ill., Chicago**—APARTMENT—Howard F. Wallach & Harold S. Blankstein, 401 S. La Salle St., soon lets contract, 18 story, 128-units apartment and 51-car Garage, 27-39 E. Cedar St. $2,500,000. L. R. Solomon & Assocs., 61 W. Superior St., archts. CD 1/11.

HEAVY CONSTRUCTION—LB & CA

INDIANA—State Hy. Dpt., State House, Annex, Indianapolis.

J. C. O'Connor & Sons, Inc., 2104 Miner St., Fort Wayne, Ind., CA **$97,092.** one 50 ft., one 60 ft., one 50 ft. continuous steel beam over B & O R.R., 6.5 mi. northeast of Valparaiso, Porter Co. Bids Dec. 6, awarded Mar. 14. CD 12/13, under LB.

▲ **WISCONSIN**—State Hy. Com., State Office Bldg., Madison, Bids opened 4/11.

Wis.—Ben Ruesch, Medford, Wis., LB **$218,812.** Contract 1, grading, base, structures 12.155 mi. S. T. Hy. 13, Washburn-Bayfield Rd., Proj. T 011-2 (12) Bayfield Co.;

Wis.—R. T. Madden Co., Janesville, Wis., LB **$326,573** contract 1, c. conc. 2.471 mi. U. S. Hy. 51, Stoughton S.T.H. 30 Road, Proj. F 05-1 (30), Dane Co.;

Wis.—Braun Constr. Co., Hy. 175, Fond du Lac, Wis., LB **$381,916,** Contract 1, grading, base, and pavement 1.62 mi. S.T. Hy. 175 and U. S. Hy. 151, Main St., U.S.H. 41-Fond du Lac Road, and U.S.H. 151 Interchange, Proj. U 03-1 (51), T 03-1 (12), and T 017-3 (13), Fond du Lac Co.;

Wis.—R. R. Birdsall & Sons Co., 1025 12 St., Racine, Wis., LB **$262,970.** Contract 1, grading, base, c. conc. 0.991 mi. 30th Ave. US 0942 (2), Kenosha Co.;

Wis.—Farmers Bros., Tomah, Wis., LB **$328,156** Contract 1, c. conc. base, b. conc. 1.482 mi. Main St. and Fond du Lac St., S.T. Hy. 49 and U.S. Hy. 151, Proj. T072-1 (6), T 035-1 (5) and T 017-2 (16), Dodge and Fond du Lac Counties;

Wis.—Schneider-Borchert Co., 606 W. Wisconsin St., Fond du Lac, Wis., LB **$129,089,** Contract 1, c. conc. b. conc. 0.272 mi. North 35 St. U. S. Hys. 16 and 18, Proj. U01-1 (3), Milwaukee Co.;

Wis.—Joseph D. Bonness, 1409 N 27 St., Milwaukee, Wis., LB **$703,347.** Contract 3, c. conc. and structures 0.486 mi. N. Green Bay Ave., S. T. Hy. 57, Proj. U 5709 (6), Milwaukee Co.;

Wis.—Mathy Constr. Co., 508 Hoeschler Bldg., Madison, Wis., LB **$148,887,** Contract 1, single aggreg., bit. surf. 7.245 mi. The Osseo-Augusta Rd. Proj. T 0149 (3) and T 0149 (4), S. T. Hy. 27, Trempealeau and Eau Clarie Counties; LB **$317,930.** Contract 1, single aggreg. bit. surf. 17.337 mi. The Ellsworth-River Falls, Ellsworth-Plum City, and Prescott-Ellsworth Roads, S. T. Hy. 35 and U. S. Hy. 10 Proj. T 028-2 (1), T 019-1 (24), T 019-1 (23) and A.F.E. 49-731, Pierce Co. CD 3/29.

Ray D. Baker, Box 5155, Southfield Station, Detroit 35, Mich. CA **$103,987.** WW imprvs., MADISON HEIGHTS, MICH. City, Myrtle Chamberlain, city clk., City Hall, Madison Heights, Mich. Bids Mar. 20. CD 3/18.

▲† **A. J. Etkin Constr. Co.**, 10111 Capital Ave., Oak Park, Mich. CA **$1,184,724.** airfield bldgs., Wurtsmith Air Force Base, OSCODA, MICH. U. S. Eng., 600 E. Jefferson St., Detroit, Mich. CD 4/11, under LB.

A & A Asphalt Paving Co., 4140 Lapeer Rd., Pontiac, Mich. CA **$136,431.** 2 in. b. conc. pavement, PONTIAC, MICH. City, City Hall, Pontiac, Mich. Bids Mar. 18. CD 3/5.

BUILDINGS—LB & CA

Dunlop & Johnston, Inc., 19220 Miles Ave., Cleveland 28, O., LB **$810,000.** AUDITORIUM and extra classrooms BLDG., CLEVELAND, O. The Temple, Ansel Rd. and E 105 St., Cleveland, O. CD 5/25.

J. O. Hunting Co., 9th-Chester Bldg., Cleveland 14, O., LB **$565,435** (7 bidders) general contract, Byron JUNIOR HIGH AUDITORIUM, SHAKER HEIGHTS, O. Shaker Heights Bd. Educ., 3115 Woodbury Rd., Cleveland Zone 20, O. Bids Apr. 9. CD 3/11.

The Knowlton Co., 1133 W. Columbus St., Bellefontaine, O., CA **$836,000.** HIGH SCHOOL, Sharon and Chester Rds., SHARONVILLE, O. Princeton Local School Dist., 336 Reading Rd., Sharonville, O. Bids Mar. 7. CD 1/22.

▲ **Procon, Inc.**, 1111 Mt. Prospect Rd., Des Plaines, Ill., CA Est. **$7,250,000.** fluid catalytic cracker and gas concentration facilities at REFINERY, BLUE ISLAND, ILL. Clark Oil & Refining Corp., 131 and Kedzie St., Blue Island, Ill. Universal Oil Products Co., 30 Algonquin Rd., Des Plaines, Ill., engr.

▲ **Project Development, Inc.**, Max Manes, pres., 158 High St. N E., Warren, O. Own Forces, **$3,000,000.** 186-unit HOUSING DEVELOPMENT, "Fairlawn Heights" North Rd. in Howland Twp., WARREN, O.

▲ **Fluor Corp.**, 2500 S. Atlantic St., Los Angeles, Calif., CA **$4,000,000.** 1 story brick ROLLING MILL addn., CHICAGO, ILL. Hydrometals, Inc., 2959 W. 47 St., Chicago 32, Ill.

L. J. Graf Constr. Co., 6327 N. Pulaski Rd., Chicago, Ill., CA **$875,000.** 3 story SCHOOL, Chicago Ave. and State St., CHICAGO, ILL. Cathedral of the Holy Name, 730 N. Wabash Ave., Chicago, Ill. McCarthy & Smith, 69 W. Delaware Pl., Chicago, Ill.. archts. Awarded Mar. 28. CD 11/12/54.

Erickson & Lindstrom Constr. Co., 310 Sill Bldg., Flint, Mich. CA **$577,107.** F. A. Bower THEATER and Robert T. Longway PLANETARIUM, FLINT, MICH. City, Bd. Educ., 205 E. Eighth St., Flint, Mich. Bids Feb. 28. CD 2/13.

WEST OF MISSISSIPPI

HEAVY CONSTRUCTION—BA

▲ **Colorado**—BA 4/30—TRANSMISSION LINE—Colorado-Ute Electric Assn., Inc., Montrose, 115-kv transmission line for steam generating plant, Nucla. Bids 4/2 rejected. LB **$1,055,512.** CD 4/11, under LB.

Minn., Glencoe—BA 4/30—McLeod Co., Lida C. Luthens, aud., subgrade, corrections, grav. base and road-mixed bit. surf. 6.9 mi. between SAR 2, 2.5 mi. south of Glencoe and east line of McLeod Co., S.P. 43-602-01 (SAR 1) Minn. Proj. S 6304 (4). Plans deposit 50c.; grading, grav. surf. 8.7 mi. between west jct. of CAR 53, 3.5 mi. northeast of Stewart and SAR 8, 1.5 mi. south of Hutchinson, S.P. 43-614-01 (SAR 7), Minn. Proj. S 6294 (1), Plans deposit $1.60, $130,000, W. J. Baseman, co. hy. engr.

Minn., Shakopee—BA 4/30—Scott Co., A. A. Mertz, aud., grading, grav. surf. 4.5 mi. between CAR 75, 5 mi. north of south line of Scott Co. and 2.5 mi. southwest of Prior Lake, S.P. 70-603-02 (SAR 23) Minn. Proj. S. 6276 (4); 2.8 mi. between 1.25 mi. south of Shakopee and Marystown, S.P. 70-607-02 (SAR 5) Minn. Proj., S. 6283 (2); Plans deposit $1.60; grav. base road-mixed bit. surf. 3.7 mi. between T.H. 282 in Jordan and 3.7 mi. east, S.P. 70-511-64 (SAR 6) Minn. Proj. S. 6166 (2), Plans deposit 50c., $110,000, L. Ploumen, co. hy. engr.

Minn., Walker—BA 4/30—Cass Co., L. C. Peterson, aud., grading, grav. surf. 7.9 mi. between TH 64 and CAR 24, 6.3 mi. west of Pine River, S.P. 11-606-01 (SAR 2) Minn. Proj. S 6555 (3), Plans deposit $2.35; grav. base, road-mixed bit. base 4.5 mi. between 4.5 mi. west of TH 371 and TH 371, 2.5 mi. north of Hackensack, S.P. 11-608-01 (SAR 6) Minn. Proj. S 6574 (1). $110,000. Plans deposit 50c., D. Cole, co. hy. engr.

† **Ark., Fort Smith**—PARKING APRON—BA 5/2—U. S. Eng., P. O. Box 867, Little Rock, constr. 275 x 422 ft. extension to aircraft parking apron, thickness 9 in. cement, relocate sewer, electric lines, constr. water line, erosion control, ENG-03-050-57-41. $100,000-$500,000. CD 4/11.

† **Minn., Duluth**—DORMITORY—BA about 5/14—U. S. Eng., 1217 U. S. Post Office & Custom House, St. Paul, Zone 1, airmen's dormitory, Duluth Air Force Base, ENG.-21-018-57-12. CD 8/23.

† **N. M., Las Cruces**—BA About 5/20—U. S. Eng., P. O. Box 1538, Albuquerque, sewage disposal plant, White Sands Proving Ground, ENG.-29-005-57-43.

† **N. M., Las Cruces**—ELECTRICAL DISTRIBUTION—BA About 5/21—U. S. Eng., P. O. Box 1538, Albuquerque, expansion of electrical distr., White Sands Proving Grounds., ENG.-29-005-57-17. CD 8/29.

BUILDINGS—BA

▲ **Tex., Austin**—UTILITY—BA 5/3—Board for Texas State Hospitals & Special Schools, 4405 Lamar Blvd., 83,320 sq. ft. ward bldg. and utility bldg., Proj. No. 191-L-56-BC, $1,000,000. Kuehne, Brooks & Barr, 203 Perry-Brooks Bldg., Austin, archts.-engrs. J. Roy White and Allwyn G. Gannaway. Assocs., and B. Segall, Jr., 705 Lamar Blvd., Austin, engrs. CD 3/27, under LB.

Tex., Mexia—HOSPITAL, etc.—BA 5/3—Texas State Hospitals & Special Schools Bd., 4405 Lamar Blvd., c/o W. C. Moore, Austin, constr. hospital and administration bldg. $490,000. Plans deposit $25. Wilson, Patterson & Assocs., 601 Bailey St., Fort Worth, archts. CD 1/18, under LB.

▲ **Tex., Houston**—CLASSROOM—BA About 5/5—University of Houston, 705 Fannin St., Fred J. Heyne Classroom Bldg. $1,000,000. Cato & Austin, 2401 LaBranch St., archts., Robert J. Cummins, Union National Bldg., and Lockwood & Andrews, 1010 Waugh St., engrs. CD 11/29.

† **N. M., Albuquerque**—BUILDINGS—BA 5/9—Atomic Energy Comn., 4001 Gibson Blvd., P. O. Box 5400, modifications to 4 bldgs., ENG-2-92-57-11. $530,000-$600,000.

Ark., Jonesboro—MEN'S DORMITORY—BA 5/15—Arkansas State College, Jonesboro, 2 story, 4 wing men's dormitory on campus incl. utilities, landscaping and equipment, $650,000, Elmer Stuck, Jonesboro, Ark., archt.

† **N. M., Albuquerque**—ARMORY—BA About 5/16—U. S. Eng., P. O. Box 1538, repair to U.S.A.R. Armory, ENG-29-005-57-88.

Tex., Houston—SCHOOL—BA 5/21—Houston Independent School Dist., 1300 Capitol St., Atherton Elementary School, north of Dogan. $600,000. Frank C. Dill, 1211 Hyde Park St., archt. CD 3/8.

▲ **Tex., Houston**—SCHOOL—BA 5/23—Houston Independent School Dist., 1300 Capitol St., "Briargrove" Elementary School. $1,100,000. Extended date. Cameron Fairchild & Assocs., 2626 W. Dallas St., archts. CD 3/21.

Tex., Houston—SCHOOL—BA 6/4—Houston Independent School Dist., 1300 Capitol St., Clinton Elementary School for Negroes. $550,000. Vance D. Phenix, 2425 Ralph St., archt. CD 3/8.

Tex., Robstown—PLANT—Bids Asked—Sam Hausman, 1222 Laredo St., Corpus Christi, meat processing plant unit. $175,000. Walter Wisznia, 3226 Reid Dr., Corpus Christi, archt. H. P. McElhaney, Wilson Bldg., Corpus Christi, engr., CD 1/2.

BUILDINGS—SLC

Fla., West Palm Beach—PIPING—Pratt & Whitney Aircraft Div. of United Aircraft Corp., 400 Main St., East Hartford, Conn., soon lets contract Job 2129-C piping and equipment for fuel tank farm. George H. Miehle, 345 New Center Bldg., Detroit, Zone 2, Mich. engr. CD 9/21.

HEAVY CONSTRUCTION—LB & CA

Lametti & Son, 211 N. Pascal St., St. Paul, Minn. CA **$262,257.** N trunk sanitary sewer, N trunk water main, storm sewer, sanitary sewer and water laterals, COLUMBIA HEIGHTS, MINN. City, R. L. Ernest, mgr., Columbia Heights, Minn. Bids Mar. 26.

† **G. I. Johnson & Son Co.**, 848 W. 79 St., Minneapolis, Minn. LB **$302,435** (3 bidders) club service bldg. Air Force Base, ENG-21-018-57-9, DULUTH, MINN. U. S. Eng., 1217 U. S. Post Office and Custom House, St. Paul, Minn. Bids Apr. 9. CD 3/19.

IOWA—State Hy. Comn., Ames,

Kaser Constr. Co., 3111 Ingersoll St., Des Moines, Iowa. CA **$538,322.** b. conc. 19.877 mi. Allamakee Co. Bids Apr. 2. CD 4/9, under LB.

Jackson Constr. Co., Nevada, Iowa. CA **$328,372.** paving, CEDAR FALLS, IOWA. City, City Hall, Cedar Falls, Iowa. Bids Mar. 25. CD 3/8/55.

MISSOURI—State Hy. Dpt., Jefferson City,

Clarkson Constr. Co., 4133 Gardner Ave., Kansas City, Mo. CA **$251,117.** 140 ft. plate girder extension, Sta. 53 plus 81 under Independence Ave., Jackson Co. Bids Mar. 29, awarded Apr. 11. CD 4/11, under LB.

MISSOURI—State Hy. Dpt., Jefferson City,

Mo.—Peter Kiewit Sons Co., 1024 Omaha National Bank Bldg., Omaha, Neb. LB **$644,160.** 51 ft. c. conc. 1.875 mi., Boone Co.;

Mo.—Giesler Bros. Constr. Co., 943 Grand Ave., Perryville, Mo. CA **$81,997.** grav. or crushed stone surf. 9.4 mi., Cape Girardeau Co. Bids Mar. 29, awarded Apr. 11. CD 4/11, under LB.

Haggart Constr. Co., 403 First National Bank Bldg., Fargo, N. D. LB **$284,766.** base bit. surf., WILLISTON, N. D. City, Williston, N. D. Bids Apr. 2. CD 3/22.

Everetts & Kelso, Jamestown, N. D., LB **$371,133.** (4 bidders) paving, curb and gutter, WISHEK, N. D. City, Wishek, N. D. G. J. Toman, Mandan, N. D., engr. Bids Mar. 19.

Hunter & Lundberg, 310-A Poyntz St., Manhattan, Kan. CA **$425,747.** WW sys. Contr. 8, treatment plant addn., using Alternates 1A, 2A, 3A and 4A, incl. 4 new ¾ MGD filters, appurtenances, piping and equip., MANHATTAN, KAN. City, Orpha Stewart, clk., Manhattan, Kan. CD 2/20, under LB.

Shawner & Hale, Maud, Okla., LB **$75,000.** laying gas pipe to connect with gas transmission main, Frans-worth area, TEXAS. Sinclair Oil & Gas Co., c/o Petroleum Bldg., Houston, Tex. CD 11/16/55;

Ferguson Ready Mix Co., Perryton, Tex., LB $97,300. constr. compressor unit, Perryton, (TEXAS).

▲† **U. S. Eng.**, Ellington Resident Office, Galveston Dist., CE P.O. Box 5013, Ellington Air Force Base, Tex., cancelled bids to have opened Mar. 19, rectification and or imprvs. to Brays Bayou from Old Main to South Main St., and Stella Link Rd., to T&O RR., Houston, CIVENG-41-243-57-52, TEXAS. **$1,000,000-$3,000,000.** CD 2/19.

H. B. Zachry Co., P. O. Box 10188, Austin, Tex., LB **$515,465,** est. $544,491. constr. offices open mess and pool, ENG-41-443-57-15, FORT HOOD, TEX. U. S. Eng., 100 West Vickery St., Fort Worth, Tex. CD 3/26.

W. D. Faulkner, Pecos, Tex., LB **$119,250.** county part work, incl. golf course, clubhouse, SEMINOLE, TEX. Gaines Co., c/o Courthouse, Seminole, Tex. Bids Mar. 26, CD 3/25.

Krebs Constr. Co., 6649 Travis St., Houston, Tex., LB **$287,414,** permanent type concrete bleachers, temporary wood bleachers with steel frame, 4 masonry gate houses lighting facilities, appurtenances, TEXAS CITY, TEX. Texas City Independent School Dist., Texas City, Tex. Bids Apr. 4.

▲ **COLORADO**—State Hy. Dpt., 4201 E. Arkansas St., Denver,

Schmidt Constr. Co., P. O. Box 175, Arvada, Colo., CA **$1,382,466,** est. $1,390,000. grading, structures 10.561 mi. State Hy. No. 1, Colo. Proj. I 002-2 (39) El Paso Co. Bids Apr. 9. CD 4/2.

COLORADO—State Hy. Dpt., 4201 E. Arkansas St., Denver,

Smith & Lucas, Colorado Springs, Colo., CA **$996,304,** est. $1,004,000. grading, structures 10.057 mi. State Hy. No. 1, I 002-2 (45), Pueblo Co. Bids Apr. 10. CD 4/2.

† **R. D. Lowman General Contractor, Inc.**, 1617 E. Missouri St., El Paso, Tex. LB **$138,578.** Schedule A, A C & W facilities, Las Cruces Air Force Base, Continental Divide Air Force Station, Moriarty Air Force Station, ENG.-29-006-57-78, NEW MEXICO. U. S. Eng., Box 1538, Albuquerque, N. M. Bids Mar. 19. CD 2/15.

Bradbury & Stamm, Box 1628, Albuquerque, N. M. LB **$86,713.** Schedule B. (New Mexico).

BUILDINGS—LB & CA

P. L. Richardson Co., 224 N. Gaines St., Little Rock, Ark., CA **$417,000.** 2 story, brick, concrete, steel

CHAPEL AND FINE ARTS BLDG., BATESVILLE ARK. Arkansas College, Batesville, Ark. CD 3/15.

Meisner-Anderson Co., Bismarck, N. D. LB **$502,256.** general constr. HIGH SCHOOL, MINOT, N. D. Bd. Trustees, Minot Catholic High School, Minot, N. D. Bids Mar. 28. CD 3/18.

O'Rourke Constr. Co., 1001 Commerce St., Dallas, Tex., LB **$297,500,** est. $100,000; structural steel masonry, WAREHOUSE, DALLAS, TEX. Earl M. Jorgensen Co., 2200 W. Commerce St., Dallas, Tex. Bids Mar. 26. CD 3/21.

O'Rourke Constr. Co., Box 3501, Dallas, Tex., LB Est. $325,000; PAINT AND VARNISH PLANT, GARLAND, TEX. Sherwin-Williams Co. of Texas, 1707 Live Oak St., Dallas, Tex., Bids Mar. 26, CD 3/21.

Construction Engineers Co., 700 Rosine St., Houston, Tex., CA **$444,995.** LAMAR TERRACE ELEMENTARY SCHOOL, HOUSTON, TEX. Houston Independent School Dist., 1300 Capitol St., Houston, Tex. Bids Apr. 4. CD 3/15.

Wm. R. Craig, 1214 Basse Rd., San Antonio, Tex., CA $368,000, 42,000 sq. ft. masonry, concrete steel SHOPPING CENTER, 2815 Hillcrest, San ANTONIO, TEX. Hillcrest Shopping Center, Inc., c/o Hessen & May, archts., 148 W. Olmos Dr., San Antonio, Tex., CD 4/10.

FAR WEST

HEAVY CONSTRUCTION—BA

Calif., Los Altos—BA 5/7—City, c/o City Clerk, City Hall, sewage projects, $425,000. Plans deposit $20. Brown & Caldwell, 66 Mint St., San Francisco, Calif., engrs. CD 5/23.

Calif., Pomona—ATHLETIC FACILITIES, etc.—BA 5/8—State Div. Architecture, 1100 S. Grand Ave., Los Angeles, athletic facilities and utilities, physical education facilities, site development-partial, California State Polytechnic College, Kellogg Campus. $263,500. Plans deposit $50. CD 4/24/56, under Public Bldgs.

† **Oregon**—BA 5/15—U. S. Eng., City-County Airport, Walla Walla, Wash., supplementary spawning channel McNary Dam, Umatilla Co., CIVENG. 45-064-57-75. Myron E. Page, Jr., c/o owner, engr. CD 12/4/52.

† **California**—PRESSURE REDUCING STATIONS, etc.—BA 5/22—Bureau Reclamation, Dpt. Interior, Oak View, modifications of pressure reducing stations and meter stations along pipe-line distr. sys., Cachuma Proj. near Santa Barbara, Spec. DC-4894, adv. ENR 4/25. CD 9/4/56, under Earthwork, Waterways.

BUILDINGS—BA

Calif., Fresno—ENGINEERING—BA 5/7—State Div. Architecture, 1120 N. St., Sacramento, 1 story with belled concrete caissons, rein.-con. precast concrete panels, engineering bldg. $499,400. Plans deposit $50. CD 4/24/56.

Calif., Corona—HOSPITAL, etc.—BA 5/8—State Div. Architecture, 1100 S. Grand Ave., Los Angeles, 1 story, 4,730 sq. ft. tuberculosis hospital addn. at California Institute for Women, and 8 separate 1 story, 1,486 sq. ft. inmate cottage wings addn. $588,-150. Plans deposit $50. CD 4/24/56.

▲ **Calif., San Diego**—HEALTH CENTER—BA 5/8—San Diego Co., 1600 Pacific Hy., San Diego, 3 story, rein.-con. Public Health Center Bldg. $1,231,500. CD 3/22/55.

▲ **Calif., Palo Alto**—HOSPITAL AND REHABILITATION BLDG., etc.—BA 5/10—Stanford University, Palo Alto, and City of Palo Alto, City Hall, rein.-con. structural steel central hospital core and nursing wings, Stanford University Campus, $9,000,000. Hall, Pregnoff & Matheu, 251 Kearny St., San Francisco, Calif., engr; 3 story, rein.-con. rehabilitation center bldg., Stanford University Campus, $800,000, Edward B. Stone, 635 Bryant St., archt., both projects. CD 12/13, under CA.

▲ **Calif., Del Paso Heights**—BUILDINGS—BA 5/14—American River Junior College Dist., 1333 Grand Ave., various bldgs. at college. $1,800,000. Plans deposit $80. Barovetto & Thomas, 718 Alhambra Blvd., Sacramento, archts. CD 5/28.

▲ **Calif., Los Angeles**—FINE ARTS, etc.—BA 5/15—State Div. Architecture, 1100 S. Grand Ave., Los Angeles, fine arts bldg., industrial arts bldg. and site development at Los Angeles State College of Applied Arts & Sciences, San Bernardino Freeway Campus, 157,000 sq. ft. floor area. $2,658,800. Plans deposit $100.

▲ **Calif., Pomona**—CLASSROOM UNIT, etc.—BA 5/15—State Div. Architecture, 1100 S. Grand Ave., Los Angeles, 2 story, Type I Classroom Unit, one story metal covered shop units, wind tunnel and test cell, 3,500 sq. ft. in area and 2 small structures, 320x135 sq ft. for engineering bldg., California State Polytechnic College, Kellogg Campus, $1,649,000. Plans deposit $50. CD 4/24/56.

BUILDINGS—SLC

Calif., La Habra—WAREHOUSE—Alpha Beta Food Markets, 1111 Fullerton Rd., soon lets contract, 22,000 sq. ft. laminated wood girders, tilt-up. concrete warehouse, $100,000. Novikoff Engineers, 7617 Crenshaw Blvd., Los Angeles, engrs.

HEAVY CONSTRUCTION—LB & CA

▲† **Merritt-Chapman & Scott Corp.**, 261 Madison Ave. New York, N. Y., LB **$107,955,122,** est. $135,608,-170 Glen Canyon Dam and Power House, Colorado River Storage Proj., Spec. 4825, ARIZONA, NEVADA AND UTAH. Bureau Reclamation, Dpt. Interior, Kanab, Utah. Bids Apr. 11. CD 3/19.

† **Kitchell Phillips**, 1706 W. Buchanen, Phoenix, Ariz., CA $853,100, shop armament and electronics bldg.,

"Laid 70,000 Feet of Electric Cable at McConnell Air Base"

"We dug 70,000 feet of ditch with our Vermeer 524T Pow-R-Ditcher putting in electric cable at the McConnell Air Base. Total repair cost to date is less than $75.00. This machine will surprise you! It is rugged . . . does a fine digging job . . . and costs so much less than other ditchers and trenchers."

James K. Steele and
Supt. Fred Atterbary
Steel Excavating Co.
Wichita, Kansas

VERMEER 524T POW-R-DITCHER DIGS 8"-24" WIDE & 6' DEEP

An ideal machine for contractors, municipalities, utility companies, etc. The 524T is self-propelled, one man operated. Digs at speeds of 1' to 15' per minute.

FOR FOUNDATION FOOTINGS, GAS, WATER & SEWAGE LINES

Learn about the 524T Pow-R-Ditcher . . . the low cost ditcher that digs for less! Highly maneuverable. 2-way side conveyor. Smaller models also available . . . write for complete information.

Some Excellent Sales Territory Available

VERMEER MFG. CO., 1436 W. Washington, Pella, Iowa

New!
Completely Engineered!

PLAQUES and LETTERS CATALOGUE



Architects, Engineers, Contractors, and Builders! You will find this catalogue from M. Greenberg's Sons easy to read and highly useful in planning and choosing plaques and letters for your requirements. Complete information and detailed instructions for selection and installation of all types of plaques and letters. All drawings are to exact scale.

This catalogue also illustrates the wide selection and the amazing versatility of M. Greenberg's Sons' designers in visualizing and realizing your ideas in lasting bronze and aluminum.

Write for your FREE COPY today.

BRONZE PRODUCTS
by M. GREENBERG'S SONS
765 Folsom St · San Francisco · Calif · EXbrook 2-3143
Offices in Principal Cities throughout the United States

misc. facilities, Williams Air Force Base, ENG-04-353-57-56, CHANDLER, ARIZ. U. S. Eng., 751 S. Figueroa St., Los Angeles, Calif. Bids Apr. 3. CD 4/10, under LB.

† **The Helmick Co.,** 24300 Pacific Hy., Seattle, Wash., LB $127,137 (9 bidders) clearing right of way and constr. access roads, Sch. 1, Olympia-Aberdeen 115-kv line No. 1, Thurson and Grays Harbor Counties, WASHINGTON. Bonneville Power Admin., 1001 N.E. Lloyd Blvd., Portland, Ore. Bids Apr. 4. CD 3/14.

D. Diamond Corp., 2839 S.W. 2 Ave., Portland, Ore., LB $173,985 (7 bidders) cargo shed at Terminal No. 1. PORTLAND, ORE. Portland Dock Comn., 3070 N.W. Front St., Portland, Ore. CD 5/26/54.

Irby Constr. Co., 817 S. State St., Jackson, Miss., CA $740,140 (7 bidders) 253 mi. electric distr. line and sub-station, proj. California 39A & 39B, Twenty-nine Palms, CALIFORNIA. Desert Electric Co-Operative Inc., 6480 Desert Queen Ave., Twenty-nine Palms, Calif. Bids Apr. 3. CD 4/3.

▲ **CALIFORNIA**—State Div. Hys., 120 S. Spring St., Los Angeles. Bids opened Apr. 11.

Calif.—J. E. Haddock, Ltd., 3538 East Foothill Blvd., Pasadena, Calif., LB $3,742,457 (7 bidders) grading and paving 5 mi. 4 and 6 lane freeway between Conejo Grade Summit and 5th St., in Camarillo and constr. 4 structures, Ventura Co.;

Calif.—Griffith Co., 1060 S. Broadway, Los Angeles, Calif., LB $1,695,513 (7 bidders) grading, paving 0.8 mi. 6 and 8 lane divided freeway and constr. interchange structures at Fairmount Ave. on U. S. 80 in San Diego, San Diego Co. CD 3/15.

S. J. Amoroso Constr. Co., 2100 Oakdale Ave., San Francisco, Calif., CA $954,856 (7 bidders) constr. toll plaza bldgs., addns., alterations, incl. altering administration and shops bldg., new rein.-con. maintenance bldg., center portion 40x61 ft., two 1 story, 61x120 ft. steel metal frame wings, gas station, etc., San Francisco-Oakland Bay Bridge, City of Oakland, Alameda Co., CALIFORNIA. State Div. Architecture, 1120 N. St., Sacramento, Calif. Bids Apr. 2. CD 4/9, under LB.

▲† **McDonald & Cruse,** 7540 Wheatland St., Sun Valley, Calif., LB $3,226,471 (5 bidders) imprv. Walnut Creek inlet channel Big Dalton Wash to San Gabriel River, ENG-04-353-57-36, CALIFORNIA. U. S. Eng., 751 S. Figueroa St., Los Angeles, Calif. Bids Apr. 11. CD 3/18.

G. Vella Constr. Co., 1212 E. Huntington Dr., Duarte, Calif. LB $703,614, est. $798,900 (10 bidders) Hollydale B Storm Drain, Bond Issue Proj. 20, Downey, LOS ANGELES, CALIF. Los Angeles Co. Flood Control Dist., 2250 Alcazar St., Los Angeles, Calif. Bids Apr. 5. CD 3/11.

Alameda Co., c/o Clerk, Courthouse, Oakland, Calif., rejected bids Mar. 28. 60,000 sq. ft. HORSE BARNS, L&V Terminal, Fremont, PLEASANTON, CALIF. LB $163,983. CD 4/8, under LB.

▲† **Gordon H. Ball,** 300 Camille Ave., Danville, Calif., LB $7,821,923, est. $8,556,466 (5 bidders) Schedule A, concrete runway exten. and widening for landing jet bombers at Mather Air Force Base, ENG-04-167-57-40, SACRAMENTO, CALIF. U. S. Eng., 1209 8th St., Sacramento, Calif. Bids Apr. 12. CD 3/12; **Peter Kiewit Sons Co.,** 442 Post St., San Francisco, Calif. LB $7,898,955, est. $8,883,866 (5 bidders) Schedule B concrete runway exten., etc. (Sacramento, Calif.)

▲ **N. P. Valkenburgh,** 1627 N. Chico St., El Monte, Calif., LB $1,365,320 (5 bidders) constr. Switzer Creek Storm Drain from Balboa Park to San Diego Bay, SAN DIEGO, CALIF. City, Civic Center, 1600 Pacific Hy., San Diego, Calif. Bids Apr. 10. CD 3/14.

Paul W. Wasson, 800 Pinedale Court, Hayward, Calif., CA $123,441 (10 bidders) sanitary sewers, appurtenances, Imprvt. Dist. No. 33, near WALNUT CREEK, CALIF. Central Contra Costa Sanitary Dist., 1250 Springbrook Rd., Walnut Creek, Calif. CD 8/13.

BUILDINGS—LB & CA

Gale Roberts, 338 W. 11 Ave., Eugene, Ore. CA $545,127. (7 bidders) JUNIOR HIGH SCHOOL, SPRINGFIELD, ORE. Springfield School Dist. Springfield, Ore. Bids Mar. 4.

▲ **Koppers Co., Inc.,** Koppers Bldg., Pittsburgh 19, Pa. CA $10,000,000. 2 coke oven batteries and extending COAL CHEMICAL PLANT, at Kaiser Steel Corp. plant, FONTANA, CALIF. Kaiser Eng. Div., Henry J. Kaiser Co., 1924 Broadway, Oakland, Calif. CD 4/15.

▲ **Harris Constr. Co.,** P. O. Box 109, Fresno, Calif. CA $3,319,025 (base bid plus alternates) 4 story, bsmnt., 128,000 sq. ft., 243 bed steel, concrete HOSPITAL addn., incl. ward, kitchen, nursery, etc., FRESNO, CALIF. Fresno Community Hospital, 1234 "S" St., Fresno, Calif. Bids Mar. 28. CD 4/3, under LB.

Mead & O'Donnel, 7769 Melrose Ave., Los Angeles, Calif. CA $593,542. frame stucco PATRICK HENRY JUNIOR HIGH SCHOOL, North Hollywood, Granada Hills, LOS ANGELES, CALIF. Los Angeles Bd. Educ., 1425 S. San Pedro St., Los Angeles, Calif. Bids Apr. 3. CD 4/11, under LB.

O. K. Earl Jr., 3400 E. Foothill Blvd., Pasadena, Calif., CA $116,000. 24,075 sq. ft. concrete MFG. BLDG., 210 S. Railroad St., MONROVIA, CALIF. Acme Appliance Mfg. Co., 35 S. Raymond St., Pasadena Calif., Frank O. Bigelow, 3400 E. Foothill Blvd., Pasadena, Calif., engr.

Wayne Pendergraft, 21708 Alcazar Ave., Cupertino, Calif., CA $550,012 (13 bidders) INTERMEDIATE SCHOOL, MOUNTAIN VIEW, CALIF. Mountain View, School Dist., c/o supt. Mountain View, Calif. Bids Apr. 4, awarded Apr. 8. CD 4/12, under LB.

Dinwiddie Constr. Co., 620 Market St., San Francisco, Calif., CA $881,993. CONTROL LABORATORY, RODEO, CALIF. Union Oil Co. of California, 617 W. 7th St., Los Angeles, Calif. Awarded Apr. 3. CD 4/11, under LB.

Harrod & Williams, 290 S. Murphy Ave., Sunnyvale, Calif., CA $642,824. one story, bsmnt. under 1 wing, 25,000 sq. ft., 1st floor and 6,000 sq. ft. bsmnt., pre cast concrete CITY HALL, SUNNYVALE, CALIF. City, City Clerk, City Hall, Sunnyvale, Calif. CD 3/26, under LB.

Olsen Constr. Co., 125 Brockwood Rd., Santa Rosa, Calif., CA $691,871. frame, stucco constr. WILLITS HIGH SCHOOL addn. and remodel existing bldg., WILLITS, CALIF. Willits Union High School Dist., c/o Supt., Willits, Calif. Bids Mar. 27. CD 4/4, under LB.

CANADA

HEAVY CONSTRUCTION—BA

N. S., McNabs Island—BA 5/8—Dpt. P. Wks., Hunter Bldg., Ottawa, Ont., breakwater repairs, Mauger Beach. $200,000.

† **Quebec**—BA 5/22—St. Lawrence Seaway Auth., No. 2 Temporary Bldg., Ottawa, Ont., regulating works and roadway underpass, St. Lambert Lock, Lachine section of Seaway. A. G. Murphy, c/o owner, 685 Cathcart St., Montreal, Que., ch. engr.

BUILDINGS—BA

▲ **Que., Montreal** — OFFICE SUPERSTRUCTURE — BA 4/29—Monart Corp., c/o Greenspoon, Freedlander & Dunne, archts., 4151 Sherbrooke St. W., superstructure for 17 story, 4 bsmnt., rein.-con. frame, stone facing office bldg. Guy and Dorchester Sts. $3,500,000. Pierre M. d'Allemagne, 3180 Van Horne Ave., engr.

Ont., Ottawa—FINANCE—BA 5/8—Dpt. P. Wks., Hunter Bldg., Ottawa, finance bldg., Tunney's Pasture. Over $350,000. Plans deposit $150.

BUILDINGS—SLC

Ont. Hamilton—PLANT—Building Products Ltd.. 70 Beach Rd., soon lets contract, 1 story, 116x303 ft. steel, concrete block plant. $225,000. Wr. R. Souter & Assocs., 36 James St. W., Hamilton, archts.

HEAVY CONSTRUCTION—LB & CA

Nelson River Constr. Ltd., 101 Dawson Rd., Winnipeg, Man., LB $761,266. new runway about 5,700x1,200 ft. and building up and reconstr. existing taxiways at airport, BRANDON, MAN. Dpt. Transport, Hunter Bldg., Ottawa, Ont. Bids Apr. 4. CD 3/27.

▲ **Stone & Webster,** 90 Broad St., New York, N. Y., U.S.A. CA Total est. $32,000,000 design and construct, Richard L. Hearn Generating Station unit, incl. four 200,000 kw units, ONTARIO. Ontario Hydro-Electric Power Comn., 602 University Ave., Toronto, Ont. CD 1/10/56.

Miller Paving Ltd., 56 Blake St., Toronto, Ont., CA $496,245 (15 bidders) subgrade preparation and paving; CA $186,158 (15 bidders) about 11 mi. 4 and 5 ft. wide concrete sidewalks, KAPUSKASING, ONT. Town, Town Hall, Kapuskasing, Ont. Bids Apr. 1, awarded Apr. 8. CD 3/14.

BUILDINGS—LB & CA

▲ **Burns & Dutton Concrete & Constr. Co. Ltd.,** 5440 1 St. S. W., Calgary, Alta., LB $2,500,000 (8 bidders) 2 story, rein.-con. brick SCHOOL, Provincial Institute of Technology & Art, CALGARY, ALTA. Dpt. P. Wks., Parliament Bldgs., Edmonton, Alta. Bids Mar. 28. CD 3/1.

T. A. Andre & Sons Ltd., 580 Brock St., Kingston, Ont. CA Est. over $200,000. 1 story, 135x230 ft. structural steel, concrete block BOTTLING PLANT and OFFICE, Railway and Patrick Sts., KINGSTON, ONT. Coca-Cola Ltd., 90 Broadview Ave., Toronto, Ont. Mathers & Haldenby, 15 St. Mary St., Toronto, Ont., archts. Awarded Apr. 3.

Milne & Nicholls Ltd., 57 Bloor St. W., Toronto, Ont., CA $759,307, 3 story, bsmnt. JAIL, WHITBY, ONT. Ontario Co., Box 550, Whitby, Ont. Wallace, Carruthers & Assoc. Ltd., 92 Yorkville Ave., Toronto, Ont., engrs. Awarded Apr. 5. CD 6/27/55.

▲ **J. L. Guay & Frere Ltd.,** 6900 Cote de Nieges Rd., Montreal, Que., Est. $10,000,000. 400-bed, 7 and 8 story MENTAL HOSPITAL, Route Nationale L'ANNONCIATION, QUE. Hospital of the Laurentides, c/o Lucien Byre, L'Annonciation and Provincial Health Dpt., Quebec City, Que. Awarded Feb. 14. CD 6/20.

▲ **J. H. Dupuis Ltd.,** 4324 Jeanne d'Arc St., Montreal, Que., CA $1,280,000 (9 bidders) 7 story, bsmnt., 150x217 ft., rein.-con., stone, brick COLLEGE expansion, incl. swimming pool, gymnasium, auditorium, 60 rooms, recreation hall, etc. MONTREAL, QUE. Peres Ste. Croix, College Notre Dame, 3745 Queen Mary Rd., Montreal, Que. Awarded Apr. 4. CD 2/19.

ALASKA

BUILDINGS—LB & CA

▲† **Raber and Kief B-E-C-K Constructors, Inc.,** 420 Queen Anne Ave., Seattle, Wash., LB $1,100,203 (2 bidders) LAUNDRY and DRY CLEANING PLANT, at Naval Station, ADAK, ALASKA. Seventeenth Naval Dist., 215 W. Harrison St., Seattle, Wash. Bids Apr. 9. CD 3/21.

LATIN AMERICA

BUILDINGS—LB & CA

Pan American Constr. Co., 6120 Eastern Parkway, Baltimore, Md., U.S.A. CA Est. $700,000. sulphuric acid PLANT, CUAUTITLAN, MEXICO. Guanos y Fertilizantes.

AMERICANS ABROAD

BUILDINGS—BA

† **Spain, Rota**—BARRACKS—BA 5/2—Bureau Yards & Docks, Dept. Navy, 18 St. and Constitution Ave. N.W., Wash. 25, D. C., U. S. A., enlisted men's barracks, (Spanish contractors only), Spanish Air Base Program ROT-48.

HEAVY CONSTRUCTION—LB & CA

▲ **Chemical Constr. Corp.,** 525 W. 43 St., New York 36, N. Y., U.S.A., design and construct, AMMONIA PLANT, Honshu Island, JAPAN. Befu Chemical Co. Ltd., Honshu Island, Befu, Japan.

FOREIGN

HEAVY CONSTRUCTION—BA

Iraq—BA 5/15—Ministry of Development, Govt. of Iraq, Development Bd., Baghdad, Contr. No. SPA-7 (1957) land development, incl. access and internal roads, water supply and installations for electricity distr. net works of Housing Scheme in Sector 2 at Mosul, Iraq.

PROPOSED PROJECTS

WATER SUPPLY

▲ **Colo., Boulder**—City, City Hall, water system expansion, $1,500,000-$3,000,000. CD 6/16/53.

Minn., Island Park (P. O. Mound)—Village, M. Lowe, mayor, water supply sys., incl. deep well, ground storage tank and elevated storage tank, 14 mi. water main. $550,000. Schoell & Madson, 8134 Minnetonka Blvd., Minneapolis, consult. engrs.

SEWERS, WASTE DISPOSAL

▲ **Calif., Laguna Beach**—Laguna Beach City Council, City Hall, defeated bonds Mar. 29, finance development and expansion sewage facilities. $1,300,000. James M. Montgomery, 535 E. Walnut St., Pasadena, consult. engr. CD 2/26.

▲ **Minn., South St. Paul**—City, J. F. O'Donnell, recdr. voted $1,300,000 bonds Apr. 2, storm and sanitary sewers, 13 mi. sewer 18 to 78 in.

Massachusetts—Commonwealth of Mass., Metropolitan Dist. Comn., 20 Somerset St., Boston, drainage in connection with constr. relocated Rte. 28, Medford. $300,000. Constr. in 1957.

N. J. Asbury Park—City, reconstr. trunk sewer and connections, $615,690.

Okla., Claremore—City, defeated bonds Apr. 2, sewage disposal plant, $511,000. Black & Veatch, 1500 Meadow Lake Parkway, Kansas City 14, Mo., consult. engrs. CD 3/13.

▲ **Alta., Edmonton**—City, City Hall, 22,000 ft. intercepting tunnel sewer. $2,200,000. Bids in April.

BRIDGES

CONNECTICUT—State Hy. Dpt., 165 Capitol Ave., Hartford,

New London Co.—22 ft. span, 56 ft. wide Laurel Hill Bridge over, N. Y., N. H. and H. RR., Route 12, Norwich. $510,000. Bids in 1957.

STREETS AND ROADS

▲ **ALABAMA**—State Hy. Dpt. Montgomery, Zone 4,

Mobile Co.—6-lane expressway from Nauvo to entrance of Bankhead Tunnel and new tunnel under Mobile River, Mobile. $50,000,000. Palmer & Baker, Inc., 957 Springhill Ave., Mobile, consult. engr.

N. J., Morristown—Bd. Freeholders Morris Co., Court House, repaving Columbia Rd., Morris Twp., Ridgedale Ave., Florham Park, Morris St. Dover and Riverdale Rd., Riverdale. $560,000. Robert L. Curtis, Court House, engr.

Texas—Hopkins Co., Sulphur Springs, defeated bonds Apr. 2, 250 mi. rural road surfacing thruout county, $750,000. CD 3/15.

▲ **QUEBEC**—Provincial Roads Dpt., Quebec City,

Ste. Anne de la Perade—constr. about 40 mi. Route No. 2 to bypass Ste. Anne de la Perade. $2,000,000.

EARTHWORK, WATERWAYS

▲ **Calif., Santa Ana**—Bd. Supervs.—Orange Co., Court House, Santa Ana,

FLOOD CONTROL PROJECTS

Paularino Channel, F-3, $147,000,

Los Alamitos Channel, C-1, $771,750,

Santa Ana Delhi Flood Control Channel, F-1, $387,100,

Santa Ana Grdens, F-2, $245,000. Boyle Eng. Co., Spurgeon Bldgs., Santa Ana, Calif., consult. engr. CD 7/3.

AIRPORTS

Conn., Windsor Locks—TERMINAL—State P. Wks. Dpt., 165 Capitol Ave., Hartford, plans by Phelps Barnum, 250 Park Ave., New York, N. Y. 2 story, 20,000 sq. ft. 57x85 ft. Murphy Terminal Bldg. addn., Brad-

ley Field, $550,000. Stewart W. Thompson, 250 Park Ave., New York, N. Y., consult. engr. CD 11/20.

LATIN AMERICA

Colombia—LINE—Colombian Petroleum Co., Rio de Oro, plans 42 mi. 6 in. line Tibu Field to Rio de Oro. $310,000.

▲ Mexico, Madero — CATALYTIC CRACKER UNIT — Madero Refining Co., Madero, plans 20,000 bbl. catalytic cracker unit. $3,000,000.

▲ Venezuela — CRUDE LINES — Creole Petroleum Co., Caracas, plans 37 mi. 30 in. crude line Temblador to Caripoto, $4,350,000; 9 mi. 26 in. crude pipe line Ule to LaSalina, $210,000.

PUBLIC BUILDINGS

▲ Ark., North Little Rock—HOSPITAL—City, Mayor A. C. Perry, City Hall, Plans by Swain & Allen, Gazette Bldg., Little Rock, hospital, $2,177,585. CD 3/12.

Ark., Pine Bluffs—SCHOOLS—Bd. Educ., H. F. Diel, supt. Schools, Pine Bluff, Plans by Cardwell, Rowlett & Scott, 1611 N. Broadway, Oklahoma City, Okla., and Reed & Wills, National Bldg., Pine Bluff, assoc. archts., 1 story, 43,000 sq. ft., rein.-con., brick Southeast Junior High School, over $350,000 and 1 story, 40,000 sq. ft. brick, rein.-con. Southwest Junior High School, over $350,000. CD 8/5/52.

▲ Calif., Alhambra—SCHOOLS—Alhambra High School Dist., 308 W. Main St., $5,769,000 bond election June 4, high schools. CD 2/12.

▲ Calif., Alhambra — SCHOOLS — Alhambra City Elementary School Dist., 601 N. Garfield Ave., $3,627,000 bond election June 4, schools. CD 2/12.

Calif., Lindsay—GYMNASIUM—Lindsay Unified School Dist., c/o Supt., 250 N. Harvard Ave., bond election May 28, gymnasium. $360,000.

Calif., Oakland—SCHOOL—Oakland City Unified School Dist., c/o Supt., 1025-2nd Ave., plans by George A. Ellenger, 1801 Casterline Rd., and Roland Gibbs, 5359 College St.. frame, stucco Allendale Elementary School and demolition of existing school, 3720 Penniman Ave. $575,000. CD 10/26.

Calif., Riverside—SHOP, etc.—University of California, Riverside Campus, Riverside, plans by Allison & Rible, 3670 Wilshire Blvd., Los Angeles, shop, storage and service Bldgs., 1st units in corporation yard for Dpt. of Bldgs. and Grounds, $325,000. CD 5/18/55.

Colo., Boulder—LAW SCHOOL—University of Colorado, Campus, Boulder, Colo., plans by Trautwein & Howard, 1411 Walnut St., Phila., Pa., and Robert Berne, assoc. archt., 718 Security Bldg., Denver, law school bldg. $850,000. CD 10/18.

▲ Conn., Easton and Redding—SCHOOL—Towns of Easton and Redding, Regional School Study Comn., Easton, plans by Richard L. Howland, 7 S. Main St., West Hartford, regional high school for Easton and Redding. $1,000,000. CD 7/19.

▲ Conn., Hamden—SCHOOLS—Town, Town Hall, Hamden High School addn. $1,200,000; new high school $2,800,000.

▲ Conn., Hartford—SCHOOL—Town, Town Hall, plans by Malmfeldt Assocs., 36 Pearl St., high school to replace Hartford High School on Forrest St., $4,500,000. Winfred W. DeMay, city engr. A. John Macchi, 57 Farmington Ave., engr. for site. CD 1/23.

Ill., Joliet—SCHOOL—City, City Hall, plans by Skidmore, Owings & Merrill, archts., 100 W. Monroe St., Chicago, 1 story, concrete block, Joliet Township High School addn., Collins and Van Buren Sts. $937,000.

▲ Ill., Springfield—SCHOOLS—City, City Hall, voted $1,960,000 bonds Apr. 2, two Junior High Schools. CD 3/7.

Iowa, West Liberty—SCHOOL—Bd. Educ. voted $395,000 bonds Mar. 11, Junior-Senior High School.

▲† Ky., Fort Campbell—HOUSING—U. S. Eng., 306 Federal Office Bldg., Nashville, Tenn., plans by Brush, Hutchison & Gwinn, 1609 Church St., Nashville, Tenn., 1 story 760 housing units, (Capehart). $10,000,000. Bids in June. CD 12/10.

Ky., Louisville—SCHOOL—Jefferson Co. Bd. Educ., 618 W. Jefferson St., plans by Harstern, Louis & Henry, McDowell Bldg., Greenwood Elementary School. $701,490. E. R. Ronald & Assoc., 554 S. Third St., consult. engrs.

▲ Ky., Louisville—OFFICE—State, Div. Purchases & Pub. Property, Frankfort, plans by Meriwether Marye & Assoc., 248 E. Short St., Lexington, 2- 3 story, 150x200 ft. brick office air-conditioned, for Dpt. Economic Security, Magazine St. between Eighth and Ninth Sts., $1,000,000. Proctor-Ingels, 915 S. Limestone St., Lexington, mech. engrs. CD 5/1.

Me., Biddeford—SCHOOL—City, Paul Larrabee, supt. Schools, City Hall, Junior High School and elementary school. $300,000-$350,000. Constr. 1957-58.

▲ Md., Baltimore—SCHOOL—City, Bureau Bldg. Constr. 410 Municipal Bldg., Zone 2, plans by Tyler, Ketcham & Myers, 513 Park Ave., Zone 1, 4 story, brick City Springs Junior High School, Caroline, Bethel, Lombard and Pratt Sts., $2,000,000. R. E. L. Williams, bldg. constr. engr. CD 11/9.

▲ Mass., Boston—CIVIC AUDITORIUM—City, City Hall, plans by Hoyle, Doran & Berry, 248 Boylston St., civic auditorium, Prudential Center site, $12,000,000. To go ahead in 1957-1958. CD 1/30.

Mass., North Reading—SCHOOL—Town, William E. Doten, chn. Bldg. Comn., School Dpt., plans by Stoner Assoc., 53 State St., Boston, elementary school. $350,000. Constr. in 1958.

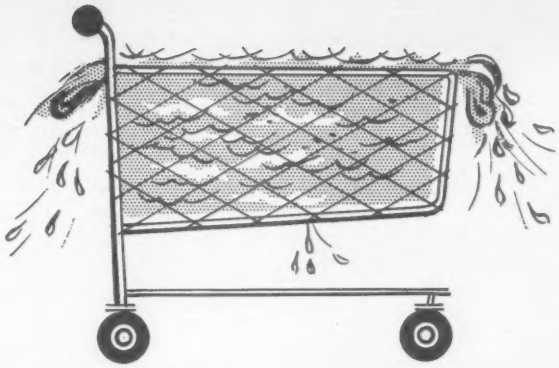

buying lots of water? . . .

. . . Then the pump YOU want is a

REDA

Submergible

PUMP

Reda gives you economical, dependable water service for ALL industrial water needs.

Reda offers a complete line for wells as small as 4"; lifts from 30 to over 10,000 feet; capacities of 5 to over 1000 G.P.M.

Reda Pumps are tried and proven! Over 100,000 are installed for homes, farms, industries, municipalities, etc.

Choose Reda for dependable, modern water service.

Write for Industrial Pump Bulletin R-432. Complete information will be promptly furnished.

SUBMERGIBLE REDA PUMPS

SIGN OF QUALITY

REDA PUMP COMPANY

BARTLESVILLE, OKLAHOMA

World's largest manufacturer of Submergible motors and pumps for over 35 years



DRILLED PILING and BELLED CAISSONS | *consultants on foundation problems*

SHORING & BRACING, FORMATION TEST HOLES, ELEVATOR SHAFTS, DE-WATERING AND UNDERPINNING . . .

CAISSON SIZES....16" to 84"
BELL SIZES.....2' to 15'
SHAFT DEPTHS.....to 200'

CASE FOUNDATION CO.

ROUTE 1, ROSELLE, ILL.

Phone: (Chicago) - - Columbus 1-0290

DETROIT OFFICE
1380 PENOBSCOT BUILDING • WOodward 8-3818

Mich., Harper Woods—CIVIC CENTER—City, Marie T. Baron, clk., defeated $350,000 bonds Apr. 1, civic center bldgs., library and community center. CD 3/6.

Minn., Brooklyn Center—SCHOOL—Bd. Educ., School Dist. No. 118, E. E. Johnson, clk., voted $385,000 bonds Apr. 1, expansion of existing school. $360,000, Shifflet, Backstrom, Hutchison & Dickey, Inc., 17 W. Franklin Ave., Minneapolis, archt. Constr. in 1957. CD 1/26/56.

Minn., Fridley—SCHOOL—Bd. Educ., Mrs. Christine Gerrety, clk., Independent School Dist. No. 23, voted $500,000 bonds Mar. 29, grade school. $350,000, Magney, Tusler & Setter, 303 Roanoke Bldg., Minneapolis, archts.

Minn., Lake Benton—SCHOOL—Bd. Educ., F. Monahan, clk., voted $525,000 bonds Mar. 26, addn. to and remodelling public school, $500,000. Swanson & Wegleitner, 500 Sexton Bldg., Minneapolis, archts.

▲ **Minn., Waseca**—SCHOOL—Bd. Educ., E. C. King, clk., defeated $2,350,000 bonds Apr. 2, two elementary schools, high school addn., etc. CD 3/28.

Mo., Hazelwood (St. Louis P.O.)—SCHOOL—School Dist. of Hazelwood R-1, St. Louis Co., Bd. Educ., Clifford Kirby, supt. Schools, 1865 Hy. 66, St. Louis County, Zone 15, defeated $500,000 bonds Apr. 2, elementary school, Howdershell Rd., expansion of Lusher and Elm Grove Schools. CD 2/13/56.

▲ **Mo., Kansas City**—SCHOOL—Center School Dist., 85 and Woodland Sts., voted bonds Mar. 5, Junior High School South of 97 St. between Holmes and Wornall Sts. $1,150,000. Marshall & Brown, 1016 Baltimore Ave., Kansas City, Mo., archts.

Mo., St. Louis County—SCHOOL—School Dist. R8, St. Louis County, Bd. Educ., Noah Gray, supt., 4900 S. Lindbergh Blvd., Zone 23, plans by Charles W. Lorenz, 700 N. Ballas Rd., Rte. 13, Box 1378, Kirkwood, Zone 22, Senior High School addn., 4900 S. Lindbergh Blvd. $750,000. CD 4/10.

▲ **Mo., University City (St. Louis 5 P. O.)**—SCHOOL—School Dist. of University City, Bd. Educ., Dr. Robert L. Gilchrist, supt. Schools, 5701 Delmar Blvd., Zone 5, voted $2,200,000 bonds Apr. 2, school, school addns., imprvs. CD 1/24.

Mo., Warrensburg—SCHOOL—Bd. Educ., Warrensburg, defeated $670,000 bonds Mar. 28, 1 and 2 story high school. $725,000, Dan R. Sandford & Sons, 800 Westport Rd., Kansas City, Mo., archts. CD 3/5.

Mo., Webster Groves (St. Louis 19 P. O.)—SCHOOL—Bd. Educ., School Dist. of Webster Groves, Charles E. Garner, supt. Schools, 16 Selma Ave., voted $825,000 bonds Apr. 2, elementary school, Bennett Ave. north of Manchester Rd. in Warson Woods; addns. to Edgar Rd., Avery, Bristol and Goodall Elementary Schools, etc.

Mont., Deer Lodge—SCHOOL—Deer Lodge High School Dist., Deer Lodge, vocational, agricultural and industrial arts high school, $700,000. Bonds voted.

▲ **Neb., Fremont**—SCHOOL—Bd. Educ., voted $1,550,000 bonds Apr. 2, Senior High School. CD 3/14.

▲ **Neb., Omaha**—SCHOOL—Bd. Educ., 3902 Davenport St., North Side Junior High School, $2,000,000. CD 11/28/55.

N. H., Durham—DORMITORY—University of New Hampshire, Thompson Hall, plans by Irving W. Hersey Assoc., Town Hall, men's dormitory, $350,000. Constr. in 1957-58.

N. H., Laconia—SCHOOL—City, School Bd., Laconia, plans by Alonzo J. Harriman, Inc., 292 Court St., Auburn, Me., elementary school, Bond Park, Lakeport. $371,000.

N. J., Moorestown—SCHOOL—Moorestown Twp. Bd. Educ., plans by Petty & Croft, 39 E. Main St., school addn., Stanwick Ave. $344,000.

N. Y., Hilton—SCHOOL—Hilton Central School Bd., Hilton, Junior Senior High School addn. 600,000.

▲ **N. Y., Rochester** — HIGH SCHOOL — Greece Central School Dist., Hoover Dr., high school. $3,530,000.

▲ **N. Y., Rush**—SCHOOL—Rush-Henrietta School Dist., Chas. H. Roth Sr., pres., Rush, bond election May 7, elementary school and junior high school. $3,846,000.

O., Columbus—WORKHOUSE—City, City Hall, addn., wing to city workhouse. $350,000.

▲ **O., Dayton**—SCHOOL—Bd. Educ., 348 W. First St., plans by Yount, Sullivan & Lecklider, 3rd Natl. Bldg., Nettie Lee Roth High School, $2,500,000. CD 3/22.

O., Ironton—SCHOOL—Rock Hill Local School Dist., Ironton, bond election May 7, school. $637,000. CD 11/19.

O., Marion—HOSPITAL—Marion General Hospital, McKinley Park Dr., hospital addn., expanding parking facilities, small maintenance bldg. $750,000.

O., Youngstown—SCHOOL—Youngstown Bd. Educ., 20 N. Wood St., plans by Paul Boucherle, 222 E. Rayen St., Kimmel Brook School. $600,000. Bids in July. CD 3/14.

† **Okla., Shawnee**—POST OFFICE, etc.—General Services Admin., General Services Bldg., Wash. 25, D. C., plans by Branson A. Davis & Albon W. Davis, Shawnee, U. S. Post Office exten., remodeling. $830,000.

▲ **Ore., Toledo**—SCHOOLS—Lincoln Co. Court House approved $1,183,000 building levy Mar. 29, school construction incl. new high school at Waldport, and new high and elementary schools at Newport.

Pa., Westtown—SCHOOL—West Chester Joint High School Bd., plans by Howell Lewis Shay & Assocs., Packard Bldg., Phila., Junior High School. $750,000. CD 7/30.

R. I., Burrillville—SCHOOL—Town, School Dpt., Elementary School, Harrisville, plans by Fraser & Henthorne, 49 Westminster St., Providence, elementary school. $350,000. Constr. in 1958.

▲ **Tex., Houston**—PROBATION HOME, etc.—Harris Co. c/o Comrs. Court, Courthouse, plans by Pierce & Pierce, 2200 Welch St., probation and detention home, $1,000,000. CD 3/11.

▲ **Tex., Houston**—SCHOOL—Houston Ind. school Dist., 1300 Capitol, plans by Ralph M. Buffington, 1710 Welch St., Alcott Elementary School. $450,000. Jas. I. Stillman, 1510 Barbee St., and Jas. H. Howard & Assocs., 2728 Weslayan St., consult. engrs.

▲ **Tex., La Porte**—SCHOOLS—La Porte Independent School Dist., voted bonds Apr. 2, high school, $1,150,000. DeWalt Elementary and Intermediate Grade School unit addns., $350,000. CD 3/20.

Tex., Longview—SCHOOL—Longview Independent School Dist., Longview, plans by Kelly & Deteau, 1st National Bank Bldg., Negro Elementary School. $375,000. CD 10/24/55.

Tex., Silsbee—SCHOOL—Silsbee Independent School Dist., Silsbee, voted bonds Mar. 30, school. $400,000.

Tex., Plainview—SCHOOL—Plainview Independent School Dist., c/o Charles F. Mathew, supt., Junior High School, $625,000.

Tex., Pleasant Hill—SCHOOL—Pleasant Hill Independent School Dist., Rte. 5, Box 319, Austin, plans by Carl H. Stautz, 1704 Exposition St., Austin, school. $350,000. B. Segall, Jr., 705 N. Lamar St., Austin, engr. CD 9/19.

Tex., Vanderbilt—AUDITORIUM, etc.—Industrial Consolidated Independent School Dist., C. D. Holmes, supt., Box 350, plans by Hedrick, Stanley & Lightfoot, archts & consult. engrs., 5201 Fannin Bldg., Houston, new auditorium and school alterations, addn. at Vanderbilt-Lolita, $350,000. CD 3/7.

▲ **Va., Arlington**—HIGH SCHOOL—Arlington County School Bd., Arlington, high school. $3,200,000.

▲ **Wash., Mount Vernon**—JUNIOR COLLEGE—Union High School Dist. No. 1, Mount Vernon, $469,000 bond election May 14, five 68,000 sq. ft. Junior College buildings. $1,000,000. Hovind, Harthorne & Smith, 1500 Westlake Ave., N. Seattle, engrs. CD 2/4.

▲ **Wash., Seattle**—CLASSROOM, etc.—University of Washington, Seattle, Zone 5, plans by Carlson, Eley & Grevstad, 432 Eastlake Ave., classroom and office. $2,115,000. To go ahead this year. CD 3/21.

Wash., Tacoma—SCHOOL—School Bd., S 8 and Tacoma Sts., plans by E. J. Bresemann, Perkins Bldg. and G. Wojahn, 6 N. Tacoma St., renovating Stadium High School. $850,000. CD 11/20.

▲ **Wis., Milwaukee**—SCHOOLS—City, City Hall, voted bonds $39,000,000 bonds, schools.

▲ **Wyo., Sheridan**—COLLEGE—Northern Wyoming Community College, 6th and Saberton, bond election May 11, college addn. $1,000,000. CD 3/29.

XEROX® Model 1218 COPYING EQUIPMENT

SPEEDS COPIES OF ENGINEERING DRAWINGS

cuts duplicating costs

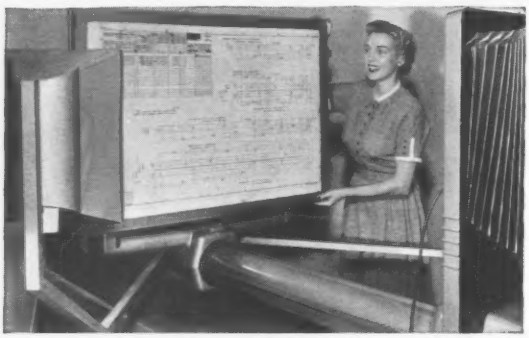

Copies engineering drawings or anything written, typed, printed or drawn up to 24″ x 36″, by xerography onto offset paper masters for runoff of 12″ x 18″ multiple copies on offset duplicator . . .

Using xerography and offset duplicating, one hundred copies of an engineering drawing, reduced from 24″ x 36″ to 12″ x 18″ can be produced in about five minutes. Copies are sharp with details of the original clearly readable on the reduced size.

PRECUT PAPER USED INSTEAD OF ROLLS . . .
eliminates print hand-cutting operations.

REDUCED SIZE SAVES FILING SPACE . . .
saves folding and unfolding time.

A study by the Ford Motor Company indicates a production cost of 97c for one hundred 12″ x 18″ copies.

Anything written, printed, typed or drawn can be quickly copied by xerography onto masters for duplicating. Copies in the same, enlarged or reduced size can be made from one or both sides of the original material, by this dry, photo-exact, electrostatic copying process. No sensitized papers, water or liquid chemicals are used.

WRITE for case histories showing how companies of all kinds, large and small, are cutting duplicating costs and speeding paperwork with xerography.

THE HALOID COMPANY
57-79X Haloid Street, Rochester 3, N. Y.
Branch offices in principal U. S. cities and Toronto

HALOID XEROX®

Que., Forestville—SCHOOL—LaCommission Scolaire de Forestville, Forestville, plans by Parent-Moranville, Haute Rive, Saguenay Co., 1 story, bsmnt., 60x132 ft., school and alterations to existing school to provide a residence. $350,000. Paul Laberge, LaMalbaie, consult. engr.

Que., Lachine—SCHOOL—LaCommission Scolaire Catholique de Lachine, 110 15 Ave., plans by Paul M. Lemieux, 1846 Dorchester St. W., Montreal, and Jean F. Morin, 1532 St. Joseph St., Lachine, high school and residence. $500,000.

COMMERCIAL BUILDINGS

Calif., San Rafael—DORMITORY—Dominican Order, c/o Schubart & Friedman, archts., 52 Vallejo St., San Francisco, 2 story, 31,800 sq. ft. dormitory bldg. at Dominican College, incl. chapel and lounges, $400,000.

Calif., Vallejo—CHURCH—Roman Catholic Church, Archbishop of San Francisco, 445 Church St., San Francisco, plans by Ryan & Lee, 305 Grant Ave., San Francisco, rein.-con. St. Basil's Church, Nebraska and Tuolumne Sts., $400,000. CD 2/2/51.

▲ Conn., Bridgeport—OFFICE—Southern New England Telephone Co., 227 Church St., New Haven, branch office bldg. $4,194,000.

Conn., Hartford—OFFICE—Hartford Federal Savings & Loan Assoc., 50 State St., demolish Princess Theatre Bldg., 58 State St. and erect 5 story, 125x57 ft. addn. to main office of owner, new facade to extend across entire enlarged front, $356,250.

Conn., New Haven—SCHOOL—Foote School, 315 St. Ronan St., plans by E. Carleton Granberry, Jr., 110 Whitney Ave., 1 story, brick, frame elementary school, 25 campus-type bldgs., 1 classroom each. $850,000. Hubbard, Lawless & Blakeley, 110 Whitney Ave., consult. engrs.

▲ Conn., New Haven—APARTMENT—Norman W. Zaubler, 1007 Farmington Ave., West Hartford, plans by Kane & Fairchild, 734 Asylum Ave., Hartford, 714-unit apartment, Oak St. Redevelopment area, $8,500,000.

Conn., Shelton—SHOPPING CENTER—Daniel Beard, Shelton Ave., plans by Val. J. Carlson, 433 Howe Ave., 2 story, 100x600 ft. and 60x100 ft., stone concrete block, brick facing shopping center, concrete fdn., Huntington Ave. $660,000.

Conn., Stamford—MOTEL—Catherine Coughlin et als, c/o Maurice J. Buckley, atty, 300 Main St., motel, High Ridge Rd. $750,000.

Conn., Stamford—HOUSES—Cedar Ridge Development, Inc., High Ridge Rd., 57 houses, roads, extending from Idlewood Dr. and Little Hill Dr. $590,000. CD 10/3.

Conn., Stamford—APARTMENT—Harold F. Darling, Vine Rd., 69-unit apartment $345,000.

▲ D. C., Wash.—SOCIAL CENTER, etc.—Catholic University, 620 Michigan Ave. N.E., plans by Murphy & Locraft, 1518 P St. N.W., social center, $657,000; dormitory, $735,000.

▲ D. C., Wash.—BELL TOWER—Knights of Columbus, 71 Meadow St., New Haven, Conn., bell tower at National Shrine of Immaculate Conception. $1,000,000.

▲ Fla., Coral Gables — DORMITORY — University of Miami, Coral Gables, plans by Robert M. Little, S. Bayshore Drive, Miami, women's dormitory. $2,695,000. CD 3/28.

▲ Fla., Coral Gables—MEDICAL EDUCATION—University of Miami, medical education bldg. $9,500,000. CD 9/23/52.

▲ Fla., Coral Gables—SCIENCE, etc.—University of Miami, Coral Gables, science bldg., $1,750,000; engineering bldg., $1,750,000; library bldg., $5,500,000.

▲ Fla., Palm Beach—SHOPPING CENTER—Bessemer Properties, Inc., 465 E. 57 St., New York 22, N. Y., plans by John L. Volk, 206 Phipps Plaza, shopping center to be called Royal Poinciana Plaza on 6 acre site bounded by Royal Poinciana Way and Cocoanut Row. $2,500,000.

▲ Ill., Aurora—HOMES, etc.—West Aurora Plaza, Inc., c/o Robert G. Wolfe, atty., 111 W. Monroe St., Chicago, 1,200 homes, 100-apartment bldgs., shopping center, incl. 35 units, 464-acre tract, Galena Blvd. and Edgelawn St. $40,000,000.

▲ Ill., Chicago—HOTEL, etc.—Owner, c/o Harry George, atty., 1 N. LaSalle St., 18 Story hotel and 8 story office bldg., 600 Block South Michigan Ave. $13,000,000.

▲ Ill., Chicago—APARTMENT—Owner, c/o Leonard H. Lawrence, atty., 1036 N. Dearborn St., plans by L. R. Solomon & Assocs., 61 W. Superior St., 20 story, 126-unit apartment, 30 E. Elm St. $2,500,000.

Ind., Collegeville—DORMITORIES—St. Joseph's College, two dormitories. $680,000.

Ind., Evansville—DORMITORY—Evansville College, 1800 Lincoln St., dormitory. $400,000.

Kan., Wichita — FINE ARTS, etc. — Friends University, Lowell E. Roberts, interim pres., 106 E. Second St., Zone 2, fine arts bldg., gymnasium, admin. bldg. $350,000.

Md., Baltimore — SHOPPING CENTER — Waverly Realty Corp., c/o Albert Stark, 210 E. Lexington St., Zone 2, shopping center, 2835 Greenmount Ave. $800,000.

Md., Emmittsburg — DORMITORY — St. Mary's College, Emmittsburg, plans by May & Ruppert, 1308 18 St. N.W., Wash., D. C., 4 story, 45x100 ft., brick, stone, concrete, steel dormitory addn. $600,000. Edw. Sculley & Assocs., Bethesda, struct. engrs. W. A. Brown, 1223 Conn. Ave. N.W., Wash., D. C., mech. engr.

▲ Mass., Boston—STUDENT UNION—Boston University, 688 Boylston St., plans by Hoyle, Doran & Berry, 248

Save time, money with RILCO laminated or timber construction

Railroad bridge, Toutle river, Washington. Three 60-foot spans in the 180-foot bridge. Each span has two Rilco stringers 12½" x 52" — ties 8" x 10", 16" o.c.



Colorado Fuel & Iron warehouse, Spokane has 25 Rilco wood laminated 60-foot parallel chord trusses, two 40-foot carrying trusses.

Build better for less with Rilco glued-laminated and solid timber consrtuction. Save time too — Rilco fabricated members arrive on the jobsite ready for erection — cut days off valuable building time. Even on first job, contractors report successful time — and money-saving results.

And Rilco members are fire-safe — slow to burn — won't collapse suddenly under high temperatures — allow time to save structure and contents.

Available in radial and tied arches, beams, bowstring trusses — Rilco members are engineered for supermarkets, factories, docks, outdoor theaters, grandstands — or whatever your project — large or small.

FREE

Write for Free Booklet on Wood Laminated and Fabricated Solid Timbers

RILCO works wonders with wood

RILCO LAMINATED PRODUCTS, INC.

W-801 First National Bank Building
St. Paul 1, Minnesota

District Offices: Newark, N.J., Fort Wayne, Ind., Tacoma, Wash.

CUTTING WIRE ROPE IS EASY the MORSE-STARRETT way



FAST Especially designed cutting blade and dies assures fast cutting action. The hammer principle eliminates any special skill requirements.

CLEAN Wire rope ends are cut smooth and clean for perfect threading or splicing.

SAFE The enclosed cutting blade locked in the body of the cutter assures perfect safety.

PORTABLE Models for tool kit or stationary operation. With cutting capacities up to: 1 inch, 1-1/16 inch, 1-1/2 inch.

SEE YOUR DEALER OR WRITE DEPT. "B"

MORSE-STARRETT PRODUCTS CO.

1204 - 49th AVENUE, OAKLAND 1, CALIFORNIA

Boylston St., student union bldg. $1,000,000. Const. 1958. CD 12/4/51.

▲ **Mass., Swampscott**—SHOPPING CENTER—Louis H. Salvage, c/o Louis H. Salvage Shoe Co., 10 High St., Boston, 678,000 sq. ft. shopping center, Paradise Rd. $2,000,000.

Mass., Woburn-Winchester—SHOPPING CENTER—Star Market Co., Stephen P. Mugar, pres., 297 Walnut St., Newton, plans by Campbell & Aldrich, 38 Newbury St., Boston, shopping center, Rte. 3, $350,000. Constr. in 1957.

▲ **Mich., Flint**—HOSPITAL—Flint Osteopathic Hospital, 416 W. Fourth Ave., hospital addn. $3,537,000. CD 8/3/50.

Mont., Billings—APARTMENT—Billings Co-operative Apartments, c/o F. A. Ripley, Inc., 616 Clark Ave., 6 story steel, concrete apartment, $600,000.

Mont., Billings—DORMITORY—Rocky Mountain College, Billings, 3 story dormitory. $344,000.

N. J., Netcong—SCHOOL—Archdiocese of Paterson, 24 DeGrasse St., for Parish of St. Michael, Netcong, plans by George F. Bial, 241 Bell Ave., Hasbrouck Heights, 2 story, brick, concrete school, Church St. $350,000.

N. J., Pompton Plains—SCHOOL—First Reformed Church of Pompton Plains, Newark-Pompton Turnpike, plans by Paul Drake, 100 Summit Ave., Summit, school and hall at Newark-Pompton Turnpike. $350,000.

N. J., West New York—SCHOOL—Our Lady of Libera, 5808 Hudson Blvd., plans by Peter Terrafranca, 510 Bogert Rd., River Edge, school. $360,000.

N. Y., Annandale-on-Hudson—DORMITORY—Bard College, Annandale-on-Hudson, plans by Sidney M. Shelov, 44 W. 56 St., New York, Zone 19, and Peter Paul Muller, assoc. archts., 10 W. 133 St., New York, dormitory, $416,000. CD 4/1.

▲ **N. Y., Brooklyn**—APARTMENT, etc.—Atlantis Corp., 522 Fifth Ave., New York, Zone 17, plans by Oscar I. Silverstone, 666 Fifth Ave., New York, Zone 19, 16 story apartment, garage, 1311 Brightwater Ave. $1,800,000.

N. Y., Brooklyn—APARTMENT—Halldale Building Corp., c/o Lama, Proskauer & Prober, archts., 395 Pearl St., 7 story apartment, 1660-1672 Flatbush Ave. $700,000. To go ahead in Summer 1957.

▲ **N. Y., Buffalo**—LIBRARY—Canisius College, Main and Jefferson Sts., plans by Foit & Baschnagel, 250 Delaware Ave., college library. $1,500,000. CD 10/22.

N. Y., Ithaca — CHURCH, etc. — First Congregational Church of Ithaca, 120 W. Spencer St., plans by Arland A. Dirlam, 729 Boylston St., Boston, Mass., and Sherwood Holt, assoc. archt., 119 E. Buffalo St., church and parish house.

▲ **N. Y., New York**—APARTMENT—Stanley R. Broff, c/o Boak & Raad, archts., 175 Fifth Ave., Zone 10, 16 story apartment, 1147-1159 Madison Ave. from 85 to 86 Sts. $2,000,000.

▲ **N. Y., New York**—DOCTORS—The New York Infirmary, Stuyvesant Square East and 15 St., Zone 3, 6 story bldg. to house doctors, nurses and internes, 312-320 E. 15 St. $1,000,000.

N. Y., New York—APARTMENT—Pelham Homes, Inc., 1340 Astor Ave., plans by H. Herbert Lilien, 201 W. 72 St., Zone 23, 6 story apartment, at west side of Holland Ave. north of Pelham Parkway, $455,000.

N. Y., Rochester—RETREAT HOUSE—Catholic Diocese of Rochester, 50 Chestnut St., 3 story wing addn. to Cenacle Retreat House, 693 East Ave. $400,000.

N. Y., Rochester—DORMITORY—Nazareth College, 4245 East Ave., plans by Waasdorp & Northrup, 740 E. Ave., dormitory. $758,000.

▲ **N. Y., Saratoga** — DORMITORY — Skidmore College, Saratoga, dormitory. $1,327,000.

N. C., Asheville—HOTEL—Grove Park Inn, Asheville, two hotel addns. $500,000.

N. D., Kenmare—HOSPITAL—Deaconess Hospital Assn., Kenmare, plans by Ritterbush Bros., 209 N. Seventh St., Bismarck, hospital, $413,000.

▲ **O., Beachwood** — SHOPPING CENTER — Beachwood Shopping Center, c/o Albert Levin, Marshall Bldg., Cleveland, Zone 13, plans by John Graham & Co., 1426 Fifth St., Seattle, Wash., shopping center on 103 acre site at southeast corner of Cedar and Richmond Rd. $32,000,000.

O., Beachwood—HOMES—Marvin Helf, Inc., 10001 Carnegie Ave., Cleveland, Zone 6, plans by Louis J. Rotman, 31715 Vine St., Wickliffe, 30 HOMES, Isabelle Ave. $720,000.

O., Cincinnati—CHURCH—Forest Chapel Methodist Church, c/o Rev. Fishburn, 22 Grove Lane, Glendale (Cincinnati), plans by Sullivan-Isaacs-Sullivan, 1800 Reading Rd., Reading, church, Sharon St. in Forest Park, $500,000.

O., Cincinnati—CHURCH—St. Joseph Church, 745 Lincoln Park Dr., church building, $400,000. Site not selected.

O., Dayton—CHURCH—Dayton Baptist Temple, 1707 Ohmer St., plans by Logedrost & Walter, Reibold Bldg., brick, stone, glass, aluminum and wood church with auditorium educational unit, etc., air-conditioned. $500,000. Work in about 30 days.

O., Norwood—SCHOOL—Sts. Peter & Paul School, 5411 Moeller St.; plans by Sullivan-Isaacs-Sullivan, 1800 Reading St., Reading, 16 room elementary school addn. $350,000.

▲ **O., Toledo**—OFFICE—Libbey-Owens-Ford Glass Co., 608 Madison St., plans by Skidmore, Owings & Merrill, 575 Madison Ave., New York, N. Y. 16 story office. $2,500,000.

Okla., Enid—CHURCH—First Methodist Episcopal Church, W. Randolph St., plans by D. A. Smith, Bass Bldg., church, $435,000.

Okla., Oklahoma City—SANCTUARY—All Souls Episcopal Church, 63 and Penna Sts., plans by Fred Pojezny, 1715 N. Broadway, sanctuary for church, Northwest 63 and Pennsylvania Sts. $350,000.

Okla., Oklahoma City—MOTEL—Benjamin Cain, 308 N.W. 38 St., plans by Fred Pojezny, 1716 N. Broadway, 4 story motel, N.W. 3 and Hudson Sts. $800,000.

Okla., Tulsa — DOCTORS CLINIC — Doctor's Inc., 2100 South Lewis St., plans by David Murray, 4232 S. Peoria St., 7 story doctors clinic, 21 and Lewis Sts. $500,000.

Tex., Dallas—SCHOOL—Ursuline Academy, 4838 Walnut Hill Lane, school, $500,000.

Tex., Houston—CHURCH—Airline Baptist Church, c/o Congregation, 4127 Airline St., plans by Roy W. Leibsle & Assocs., 3702 Almeda Rd., Baptist Church, educational bldg. $400,000. Daniel W. Gower, 5819 Ridgeway, and Jerold L. Davis 3400 Montrose St., consult. engrs.

Tex., Houston—DWELLINGS—Garex Development Corp., 6505 Chippewa St., 24 brick veneer dwellings, $402,500; 21 brick veneer dwellings, $367,500, in Arlington Heights Subdivision,

Tex., Houston—DWELLINGS—Bob Harris, Inc., 704 S. Richey St., 22 brick veneer dwellings, $385,000; 20 brick veneer dwellings, $350,000, in Arlington Heights subdivision,

▲ **Tex., Houston**—CHURCH—South Main Baptist Church, 200 Colquitt St., plans by Wirts, Calhoun, Tungate & Jackson, 2506 Richton St., church plant constr. $1,650,000. Joe A. Poole, and R. L. Reid, Inc., both 2506 Richton St., consult. engrs. CD 2/8.

Tex., San Antonio—BOWLING BLDG.—Bowlerama of Texas, Inc., c/o John Chenault, archt., 1506 Fredericksburg Rd., 33,000 sq. ft. masonry type constr., 32-lane bowling bldg., Blanco Rd. between Hillwood Dr. and Weizmann Blvd. $400,000.

Tex., San Antonio—SHOPPING CENTER—Hillcrest Shopping Center, Inc., c/o Hessen & May, archts., 148 Olmos Dr., 42,000 sq. ft., masonry, concrete, steel shopping center, 2815 Hillcrest St., $375,000. R. Marvin Shipmen, 202 W. Olmos Dr., and Paul G. Silber, Jr., 150 W. Olmos Dr., San Antonio, Tex., consult. engrs.

Ont. Guelph—NOVITIATE—St. Stanislaus Novitiate, The Jesuit Fathers, R.R.5, Guelph, preliminary sketches made by Lindsay A. Wardell, 278 Lawrence Ave. E., Toronto, novitiate, two wings, $800,000.

▲ **Ont., Toronto**—APARTMENTS—Adanac Realty, 3339 Bloor St. W., Royal York Investments, 3339 Bloor St. W. W. Chartwell Investments, 750 Spadina Ave. and Long Constr. Co. Ltd., 39 Castlebar Rd., Toronto, plans by Hanks, Irwin, Pearson, 2848 Bloor St. W., apartments and houses, 275 units, 3 story apartments on east side, 2½ story apartments on west side of Royal York Rd., $2,000,000.

▲ **Ont., Toronto**—APARTMENT—Owner, c/o B. Cooper & Sons, 147 University Ave., plans by E. I. Richmond, 455 Spadina Ave., apartment, Keele St. and Lawrence Ave. W., North York, $1,568,000.

Que., Montreal—APARTMENT BLOCK—Milot Constr., Inc., 6033 Papineau Ave., plans by Chalifoux & Geoffrey, 6275 Papineau Ave., 3 story, bsmnt., 15-suite each 42x77 ft. and 57x69 ft. brick, stone apartment block, Basile Patenaude St. $500,000.

INDUSTRIAL BUILDINGS

Calif., Menlo Park—WAREHOUSE, etc.—Park Davis Co., P. O. Box 11T, Detroit, Mich., 1 story, 300,000 sq. ft., warehouse, office, Bohannan Industrial Park.

Calif., San Francisco—PLANT—Bauer-Schfeitzer Malting Co., 530 Chestnut St., plant expansion, 530 Chestnut St. $100,000.

▲ **Colo., Englewood** — PLANT — Garden Farm, Inc., East 60 Ave. and Albion St., Denver, dairy processing plant, between Nassau and W. Oxford Aves. $1,000,000.

Conn., Clinton — FACTORY — Shore Line Industries, Boston Post Rd., factory addn. $100,000.

Conn., Norwalk—FACTORY—Burndy Corp., Connecticut Ave., factory addn. $126,000.

Conn., West Haven—WAREHOUSE, etc.—Art-Ryte Floor Covering Co., 20 Rose St., New Haven, plans by Pedersen & Tilney, 119 Whitney Ave., New Haven, 1 story, 16,000 sq. ft. warehouse and office, $160,000.

D. C., Wash.—PARKING GARAGE—"H" St. and North Capitol Parking Syndicate, Colorado Bldg., plans by Walter Marlowe, 3200 "P" St. N.W., parking garage at "H" St. and Defrees St. N.W. $250,000.

▲ **Fla., Oldsmar**—LABORATORY—Sperry Rand Corp., 30 Rockefeller Plaza, New York, N. Y., plans by C. Dale Dykema, North Redington Beach, electronics laboratory. $2,000,000.

▲ **Ga., Chamblee**—PARTS DEPOT—Deere & Co., 1325 3 Ave., Moline, Ill., parts depot. $1,000,000.

Ill., Chicago — WAREHOUSE — Florsheim Shoe Co., 130 E. Canal St., plans by A. Epstein & Sons, Inc., 2011 W. Pershing Rd., 1 story, 77,300 sq. ft. warehouse, Canal and Taylor Sts. $600,000.

Ind., Butler—MANUFACTURING—Bohn Aluminum & Brass Corp., 1400 Lafay Bldg., Detroit, Mich., plans by Giffels & Vallet, Inc., archt. and consult. engr., 1000 Marquette Bldg., Detroit, Mich., 30x160 ft. structural steel, masonry, reln.-con. manufacturing bldg. $450,000.

▲ **Ind., Evansville**—PILOT PLANT, etc.—Mead Johnson & Co., 2404 Penn St., pilot plant, office and employee training institute, etc. $8,500,000.

Ky., Paducah—WAREHOUSE—Staples Real Estate & Loan Co., George Staples Jr., mgr., 1305 E. Cypress St., Charleston, Ill., plans by Jack Harris, 518 Hickman Bldg., 248 Madison Ave., Memphis, Tenn., concrete warehouse. $100,000. Sears Roebuck & Co., 925 S. Homan St., Chicago, Ill., lessee. Bids in May.

La., Jennings—CATFORMER UNIT—Evangeline Refining Co., Inc., Jennings, catformer unit. $750,000.

Mich., Owosso — PLANT — **Reemond Co., Inc.**, Angola, Ind., plant mfg. fractional horsepower motors. $350,000.

▲ **Mich., Wyandotte** — PLANT — Wyandotte Chemical Corp., Frank B. Wolcott, gen. mgr. Research & Engineering Div., Wyandotte, polyether plastics product plant, between Biddle and Detroit River, $3,000,000. CD 2/15/56.

N. J., Newark—PLANT—G. B. Cademartori, 1419 Olert Terrace, Fort Lee, 2 story, 5,000 sq. ft. refinery plant, Tompkins Point Rd. in Newark Meadows. $200,000.

Pa., Phila.—TERMINAL—R. C. Motor Lines, 2500 Laura St., Jacksonville, Fla., truck terminal. $100,000.

S. D., Winner—GRAIN ELEVATOR—Wayne Deaver and Clarence Meyer, Alliance, Neb., grain elevator. $100,000.

▲ **Tex., Beaumont** — REFINERY UNITS — Magnolia Petroleum Co., c/o Magnolia Bldg., Dallas, 100,000 bbl. atmospheric crude still; 32,000 vacuum unit; hydrogen-sulfide recovery system; 30,000 bbl. savaforming unit; a 2nd alkylation unit, a 3rd 20,000 bbl. treating plant, high pressure gas handling facilities; lube blending plant unit, 200,000 bbl. floating roof tank. $30,000,000.

Tex., Corpus Christi—PLANT—Corpus Christi Refining Co., 4550 Tribble St., plant modernization, alterations. $560,000.

▲ **Tex., Corpus Christi** — REFINERY — North American Petroleum Corp., 614 S. Staples, refinery. $4,000,000.

▲ **Tex., Dallas**—WAREHOUSING—Alford Refrigerated Warehouses, 318 Cadiz St., dry and cold storage warehousing unit, $2,000,000; 600 ft. long dry storage warehousing unit, $3,000,000.

Tex., Dallas—WAREHOUSE—Trammell Crow, 425 S. Field St., warehouse in Hillene Dr. area, $200,000. CD 6/19/53.

Tex., Houston—PLANT—Hydril Co., 302 McCarty St., oil tool mfg. plant expansion, $200,000.

▲ **Tex., Houston**—KILNS—Ideal Cement Co., c/o Clinton Docks, Houston, addn. of 3rd and 4th kilns at plant, Galena Park area. $3,500,000.

▲ **Tex., Port Arthur**—ALKYLATION UNIT—Atlantic Refining Co., General Office, Atreco, Port Arthur, 2,100 bbl. alkylation unit, adjacent to existing refinery. $1,000,000.

Wis., Waukesha—PLANT—Waukesha Realty Corp., 250 North 12 St., 50,000 sq. ft. plant, $500,000. Rite-point, Inc., subsidiary of Norma-Hoffman Bearings Corp., Stamford, Conn., lessee.

▲ **Wyo., Green River**—PLANT—Intermountain Chemical Div., Food Machinery & Chemical Corp., Green River, plant addns. $1,000,000.

Ont., Prescott—FACTORY—Bruce Coal Co. Ltd., Hardy Arcade, Ottawa, reconstr. factory, $150,000.

Ont., Toronto—FACTORY—American Resinous Chemicals of Canada Ltd., 20 Trent Ave., plans by Paul Sears, 1498 Yonge St., 1 story, 96x160 ft. concrete block factory, Scarborough, $100,000. Leah Kobayashi & Assocs., 490 Jarvis St., consult. engrs.

UNCLASSIFIED

▲ **Arizona**—RURAL DISTRIBUTION LINES—Sulphur Springs Valley Electric Co-operative, Willcox, 239 mi. distr. line, 31 mi. 69 KV transmission line, new sub-station and system imprvs. Cochise Co. $1,584,000. CD 4/23/52.

Calif., Los Angeles—SWIMMING POOL, etc.—Bd. Supervs., Los Angeles Co., 501 Hall Records, plans by Neptune & Thomas, 742 Colorado Blvd., swimming pool, Jane Reynolds Park, Cap Proj. 8790, incl. 100x50 ft. pool and bath house, Lancaster. $220,000.

Colorado—RURAL DISTRIBUTION LINES—La Plata Electric Assn., 171 17 St., Durango, 97 mi. rural distr. lines, sys. imprvs., La Plata Co. $452,000. CD 8/28/47.

Conn., New Haven—HARBOR FRONT DEVELOPMENT—City City Hall, Harbor Front Development, land filling, bulkhead, park, heliport. $350,000. Bids in June. Henry A. Pfisterer, 111 Whitney Ave., consult. engr. William Bolton, city engr. CD 10/23.

▲ **Florida**—RURAL DISTRIBUTION LINES—Lee County Electric Co-operative, Fort Myers, 30 mi. 69 kv transmission line, 166 mi. electric distr. line, 7500 kva sub-station and sys. imprvs., Lee Co. $1,000,000. CD 11/1/55.

Illinois—RURAL DISTRIBUTION LINES—McDonough Power Co-operative, W. Jackson St., Macomb, 70 mi. rural distr. lines, 8 mi. 69 kv transmission line, 2 sub-stations and sys. imprvs., McDonough Co. $531,000. CD 12/12/51.

† **Kan., Wichita**—AIR CONDITIONING, etc.—General Services Admin., Pub. Bldgs. Service, General Services Bldg., 19 and F Sts. N. W., Wash. 25, D. C., air-conditioning and new lighting systems for U.S. Post Office and Court House. $531,000.

† Md., Baltimore—AIR-CONDITIONING—General Services Admin., Pub. Bldgs. Service, General Services Bldg., 19 and F Sts. N. W., Wash. 25, D. C., air-conditioning U.S. Public Health Service Hospital. $960,000. Turpin, Wachter & Assoc., 1004 N. Charles St., Baltimore, Md., consult. engrs.

Mich., Hazel Park — SKATING RINK — City, Calvin C. Henry, city mgr., 22422 Stephenson Hy., defeated $200,000 bonds Apr. 1, ice skating rink, and swimming pool. CD 3/7.

Minn., Winona—SWIMMING POOL—City, R. G. Wildgrube, clk., defeated $275,000 bonds Apr. 1, swimming pool. CD 1/16.

Missouri—RURAL DISTRIBUTION LINES—Osage Valley Electric Co-operative Assn., Maurice S. Solomon, mgr., Hy. 71 and Fort Scott Sts., Butler, 90 mi. rural distr. lines, sys. imprvs., Bates Co. $594,000. Allgeier, Martin & Assocs., 1204 Main St., Joplin, consult. engrs.

▲ Oklahoma—RURAL DISTRIBUTION LINES—Indian Electric Co-operative, 116 S. Broadway, Cleveland, Okla., 125 mi. rural distr. line, new warehouse bldg. and sys. imprvs., Pawnee Co. $1,090,000. CD 7/23/52.

† Okla., Muskogee—AIR CONDITIONING, etc.—General Services Admin., General Services Bldg., Wash. 25, D. C. air conditioning and lighting systems at U. S. Post Office and Court House. $456,000. Sorey, Hill & Sorey, 809 N.W. 36 St., Oklahoma City, consult. engrs.

▲ Texas—GAS LINES—Pioneer Gathering System, Inc., San Angelo, 27 mi. 16 in. and 27 mi. 12 in. gas lines, Sutton and Schleicher Counties. $1,250,000; compressor station, Schleicher Co. $350,000.

▲ Texas—RURAL DISTR. LINES—Rural Colorado River Electric Co-operative, San Marcos, expansion rural power system, distr. lines, Hays Co. $1,120,000.

Tex., Fort Worth — UNDERGROUND CIVIL DEFENSE CENTER—City, c/o J. F. Davis, mgr., City Hall, constr. rein.-con. underground Civil Defense Center at Lake Worth. $250,000. Don Kirk, 817 N. P. Anderson Bldg., consult. engr.

Tex., Kingsville—PARK—City of Kingsville and Kleberg Co., voted bonds park-recreation. $250,000.

Tex., Lubbock—MAUSOLEUM—Resthaven Mausoleum, c/o Cantrell, Burns & Whitaker, archts. Great Plains Life Bldg., 1014 crypt mausoleum, $175,000.

† Tex., Wichita Falls—AIR-CONDITIONING, etc.—General Services Admin., General Services Bldg., Wash. 25, D. C., air conditioning and lighting system at U.S. Post Office and Court House. $378,000. Pardue & Read, Radio Bldg., consult. engrs.

▲ Que., Montreal—GREENHOUSES—City, City Hall, constr. exhibition and service greenhouses at Botanical Gardens, Sherbrooke St. E. and Blvd. Pie IX, $1,400,000.

ADVERTISEMENT FOR BIDS

Northern Illinois Toll Highway

Bids to be opened May 16, 1957

CONTRACT T-2A

The work to be done under this Contract shall commence on June 15, 1957, or on such earlier date as may be mutually agreed upon between the Commission and the Contractor. All work under this Contract shall be completed on or before Dec. 15, 1958, and consists of:

The grading, drainage, paving, the construction of appurtenances, and the erection of precast concrete and structural steel bridges for approximately 2.59 miles of the Tri-State Tollway of the Northern Illinois Toll Highway in construction Section T-2A, beginning at a point about 467 feet east of the Chicago, Rock Island and Pacific R.R. at the Tri-State Tollway, Centerline Station 551+27.92 in Bremen Twp., Cook Co., Ill., and extending northerly to a point approximately 1117 feet northwest of 131st St. at Tri-State Tollway Centerline Station 688+00 in Worth Twp., Cook Co., Ill.

The approximate quantities of the principal items of work are as follows:

Roadway Excavation	82,500 C. Y.
Special Excavation	65,000 C. Y.
Borrow	1,650,000 C. Y.
Special Fill	20,000 C. Y.
Selected Subgrade	45,000 C. Y.
Granular Subbase	24,000 C. Y.
10" Reinforced PCC Pavement	72,300 S. Y.
3" Bituminous Concrete Shoulders	39,500 S. Y.
Reinforcing Steel	2,283,000 Lbs.
Structural Concrete	16,600 C. Y.
Structural Steel—Erection	840,000 Lbs.

CONTRACT T-2B

The work to be done under this Contract shall commence on June 15, 1957, or such earlier date as may be mutually agreed upon between the Commission and the Contractor. All work under this Contract shall be completed on or before Dec. 15, 1958, and consists of: The Grading, drainage, paving, the construction of appurtenances, and the erection of precast concrete and structural steel bridges for approximately 3.30 miles of the Tri-State Tollway of the Northern Illinois Toll Highway in construction Section T-2B, beginning at a point approximately 1117 feet northwest of 131st Street at the Tri-State Tollway Centerline Station 688+00 in Worth Twp., Cook Co., Ill., and extending northerly to a point approximately 1500 feet south of 111th Street at Tri-State Tollway Centerline Station 862+00 in Worth Twp., Cook Co., Ill.

The approximate quantities of the principal items of work are as follows:

Roadway Excavation	$21,000 C. Y.
Special Excavation	30,000 C. Y.
Borrow	300,000 C. Y.
Special Fill	5,000 C. Y.
Selected Subgrade	84,000 C. Y.
Granular Subbase	48,000 C. Y.
10" Reinforced PCC Pavement	154,000 S. Y.
3" Bituminous Concrete Shoulders	70,300 S. Y.
Reinforcing Steel	1,367,000 Lbs.
Structural Concrete	11,100 C. Y.
Structural Steel—Erection	787,000 Lbs.

CONTRACT T-2C

The work to be done under this Contract shall commence on June 15, 1957, or on such earlier date as may be mutually agreed upon between the Commission and the Contractor. All work under this Contract shall be completed on or before Dec. 15, 1958, and consists of: The grading, drainage, paving, the construction of appurtenances, and the erection of precast concrete bridges for approximately 2.45 miles of the Tri-State Tollway of the Northern Illinois Toll Highway in construction Section T-2C, beginning at a point about 1500 feet south of 111th Street at Tri-State Tollway Centerline Section 862+00 in Worth Twp., Cook Co., Ill., and extending northerly to a point about 1083 feet south of 95th Street at Tri-State Tollway Centerline Station 991+38.35 in Palos Twp., Cook Co., Ill. The approximate quantities of the principal items of work are as follows:

Roadway Excavation	78,000 C. Y.
Special Excavation	48,000 C. Y.
Borrow	1,400,000 C. Y.
Special Fill	53,000 C. Y.
Selected Subgrade	46,000 C. Y.
Granular Subbase	24,000 C. Y.
10" Reinforced PCC Pavement	72,000 S. Y.
3" Bituminous Concrete Shoulders	40,000 S. Y.
Reinforcing Steel	1,300,000 Lbs.
Structural Concrete	10,500 C. Y.

CONTRACT T-2ABC

This contract covers a combination of Contracts T-2A, T-2B and T-2C taken together.

THE ILLINOIS STATE TOLL HIGHWAY COMMISSION

20 N. Wacker Dr., Chicago — **By Austin L. Wyman, Chairman**

Write, wire or phone for detailed information and necessary forms, Chief Engineer, Room 1654, 20 N. Wacker Dr., Chicago 6, Ill. Telephone FRanklin 2-7020.

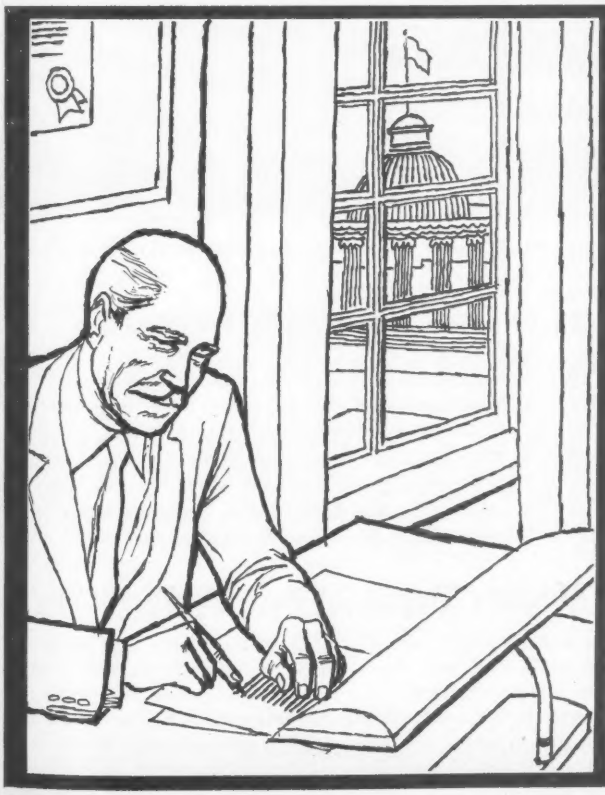

at your service in Washington

If you're interested in bidding on government projects, you'll be glad to know that the Washington Service Bureau of National Surety Corporation issues regular bulletins on just such projects.

They tell you *who* is issuing the invitations, *where* and *when* bids will be received and opened.

These bulletins are available to you without obligation. Simply write to either of the Central Bonding Offices listed below, or to any of our Branch or Services Offices.

NATIONAL SURETY CORPORATION
CONTRACT BONDS

A MEMBER OF
Fireman's Fund
INSURANCE GROUP

Fireman's Fund Insurance Company
National Surety Corporation
Fireman's Fund Indemnity Company
Home Fire & Marine Insurance Company

Central Bonding Offices | 401 CALIFORNIA STREET, SAN FRANCISCO
4 ALBANY STREET, NEW YORK

Branch Offices in Principal Cities Throughout America

New A-Line models range from ½-ton Pickups through 33,000 lbs. GVW Six-Wheelers.

NEW ACTION-STYLING! MORE USABLE POWER!

Here is the crowning achievement of fifty years of quality truck production—the great new Golden Anniversary INTERNATIONAL Trucks!

They're *Action-Styled* with fresh, clean functional lines that set a new style pace.

They're powered by new engines that put out more *usable* horsepower—including the most powerful "six" available in its field! They have exclusive new cab mountings for quieter, more level ride. New brakes, new steering, new frames—and many other new features.

The result is a new line of trucks that—more than ever before—are built to cost *least* to own!

See and drive these newest INTERNATIONALS *today!* International Harvester Company, Chicago.

Trucks Unlimited...Powered for Modern Traffic...Plus Modern Comfort

Handsome "Golden Jubilee" Pickup with the *longest* all-steel body in its class. Only Panel with third door. New 8-passenger Travelall® models. New cab-forward models with ideal 89-inch BC dimension. Tractors to 48,000 lbs. GCW. Wide range of all-wheel-drive trucks.

Redesigned engines produce *increased* power without strain from new combustion chamber and valve position . . . more usable power that's "bred for the job". . . at low rpm to keep operating and maintenance costs low. New quick-starting 12-volt ignition.

Biggest windshield—1,181 sq. in.—and *widest* cab in their class! New "Silent-Vent" door wings. New, wider front and rear springs. Exclusive level-riding 5-point cab mounting. Bigger brakes with more lining area, larger cylinders and boosters for quicker, easier stops.

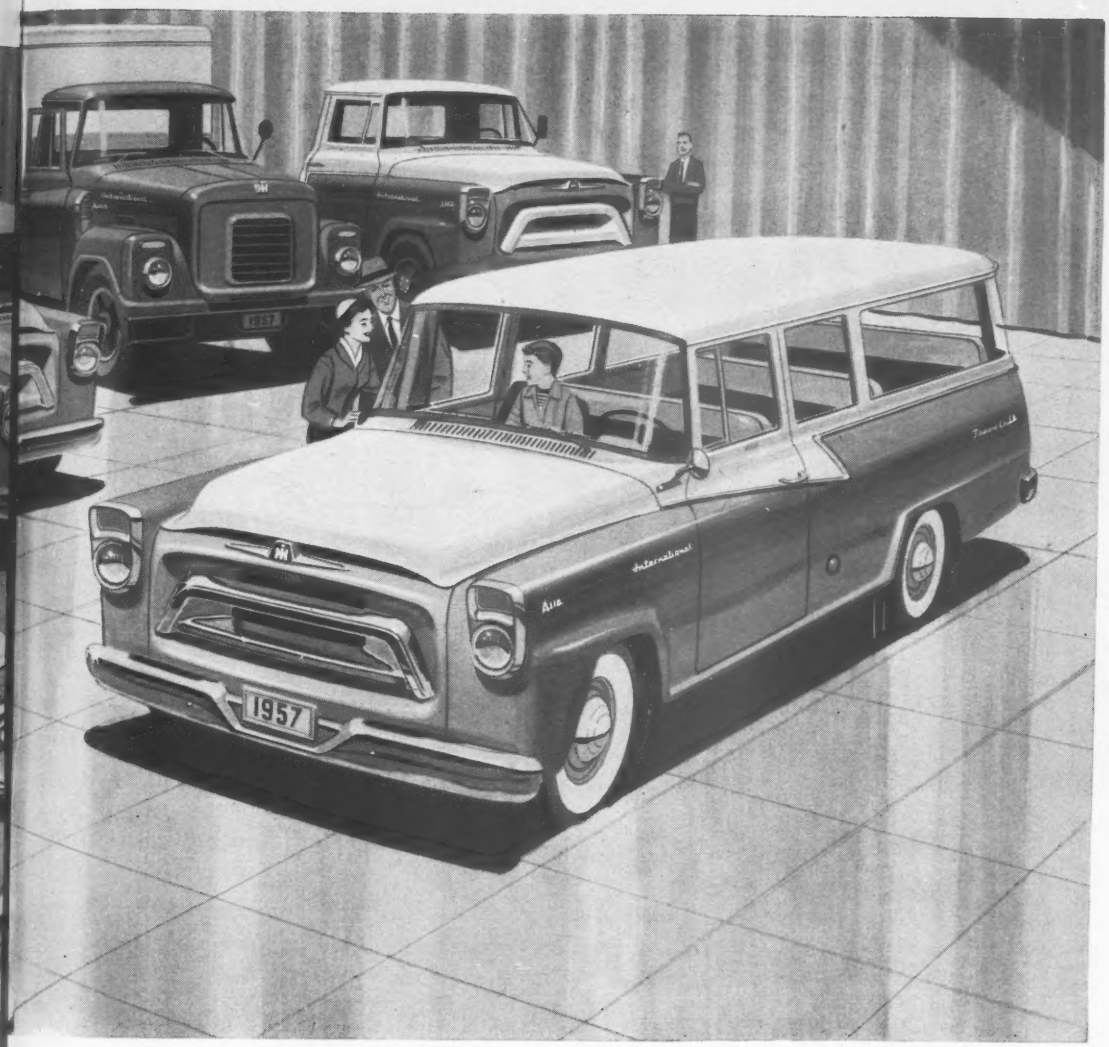

ther INTERNATIONALS, to 96,000 lbs. GVW, round out the world's most complete line.

NEW Golden Anniversary INTERNATIONALS

Cost least to own!

50 YEARS OF TRUCK QUALITY 1907 1957 INTERNATIONAL TRUCKS

Motor Trucks • Crawler Tractors • Construction Equipment
McCormick® Farm Equipment and Farmall® Tractors

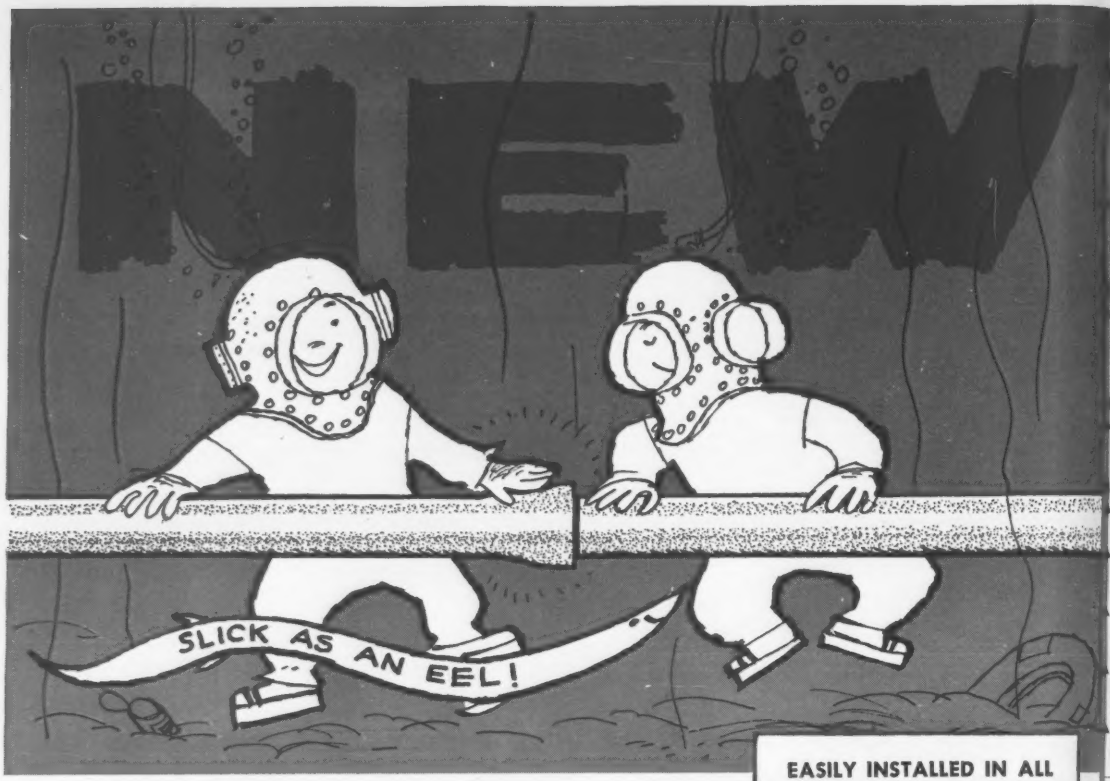

EASILY INSTALLED IN ALL KINDS OF WEATHER . . . YOU COULD EVEN DO IT UNDER WATER!

CLOW

SLIP-ON PIPE JOINT*

forms bottle-tight joint instantly!

Saves you so much time you'll think the clock is paralyzed. Yet assembly is simple and easy, and you get a seal that's tight as a drum. Best of all, you get Clow Cast Iron Pipe . . . for the watermain installation that is economical and permanent.

Want more details? You should have them. There's a Clow man not too far from you right now . . . ready to give you all the facts. Phone us—or drop us a note.

**Patent applied for*

EASY AS "A-B-C"!

A INSERT GASKET IN BELL.

B WIPE ON LUBRICANT.

C SLIP PLAIN END INTO BELL.

SINCE 1878 ®

JAMES B. CLOW & SONS, Inc.

201-299 North Talman Avenue, Chicago 80, Illinois

Subsidiaries:
Eddy Valve Company, Waterford, New York
Iowa Valve Company, Oskaloosa, Iowa

Bids—Low Bids—Contracts—Third Section

MIDDLE ATLANTIC

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS

BRIDGES

April 29 Delaware

STREETS AND ROADS

April 30, May 2 New Jersey

N. Y., New York—COAL HANDLING STRUCTURES—BA 5/10—New York City Transit Auth., 370 Jay St., Brooklyn, Zone 1, coal handling structures for 59th Street Power Plant, Manhattan Boro, P-114, Contr. No. 1, general constr. Bids 3/29 rejected. CD 4/5, under LB.

BUILDINGS—BA

Pa., Steelton—SCHOOL—BA 5/9—Pub. School Auth., 101 S. 25 St., Harrisburg, Junior-Senior High School for Steelton-Highspire Joint School System. $1,750,000. Plans deposit $40 each contract. Lawrie & Greene, 321 N. Front St., Harrisburg, archts. CD 4/11/56.

HEAVY CONSTRUCTION—LB & CA

† U. S. Eng., 24 St. and Maryland Ave., Baltimore 18, Md. cancelled bids to have been opened Apr. 26, administration bldg., Olmstead Air Force Base, MIDDLETOWN, PA. $1,000,000-$3,000,000. CD 4/2.

BUILDINGS—LB & CA

John W. Cowper Co., Sidway Bldg., Buffalo, N. Y. CA $1,994,000. HIGH SCHOOL, LACKAWANNA, N. Y. Bd. Educ., Lackawanna, N. Y. CD 4/8, under LB.

Raber & Landes, c/o H. I. Feldman, archt., 415 Lexington Ave., New York 17, N. Y. Owner Builds. $2,000,000. 14 story APARTMENT, 990 Lexington Ave. between 71 and 72 Sts., NEW YORK, N. Y.

B. J. Lucarelli & Co., Inc., 22 Orchard St., Jersey City, N. J. LB $1,989,000. DORMITORY group, Proj. N. J. 28-CH-6, EAST ORANGE, N. J. Upsala College, East Orange, N. J. Bids Mar. 26. CD 3/1.

Chestnut Hills Homes, c/o Rudolph G. Bolling, archt., 141 Morton Dr., Ramsey, N. J. Owner Builds. $1,800,000. 53 HOUSES at Craig Rd. and Hillsdale Ave., HILLSDALE, N. J.

Woodstock-at-Westfield Homes, c/o Grossi-Mittleman Agency, 1143 E. Jersey St., Elizabeth, N. J. Owner Builds. $2,000,000. 96 HOUSES on tract at Railway Ave., WESTFIELD, N. J.

▲ Butler Area Joint School, Butler, Pa., rejected bids Feb. 11, SENIOR HIGH SCHOOL, BUTLER, PA. LB $3,256,000. CD 3/8, under LB.

▲ Baltimore Contractors, Inc., 711 S. Central Ave., Baltimore, Md. LB $3,184,400. (2 bidders) addns., alterations to BLDGS. and utilities, Veterans Hospital, PERRY POINT, MD. Veterans Admin., Munitions Bldg., Wash., D. C. Bids Apr. 16. CD 2/8.

SOUTH

BUILDINGS—LB & CA

▲ G. E. Bass Constr. Co., 2715 N. State St., Jackson, Miss. CA Total est. $5,000,000. 15 story OFFICE, JACKSON, MISS. R. E. Dumas Milner, Milner Bldg., Jackson, Miss. CD 1/23.

MIDDLE WEST

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS

BRIDGES

April 30 Indiana

▲† Illinois—BA 5/24—U. S. Eng., 475 Merchandise Mart, Chicago 54, widening third section 60 ft. channel to width of 225 ft., for 4 miles, Calumet Sag Channel, Serial No. CIVENG-11-032-57-36. Extended date. CD 4/11.

HEAVY CONSTRUCTION—LB & CA

▲ ILLINOIS—Illinois State Toll Hy. Comn., 20 N. Wacker Dr., Chicago,
Peter Kiewit Co. & Condon Cunningham Co., 4229 Lafayette Ave., Omaha, Neb., and Paschen Contrs., Inc., 2739 Elston Ave., Chicago, Ill., LB $3,231,086. Contr. T-4A, 2-lane bridge structure paving only 0.91 mi. beginning 79 St. exten. across tracks of Gulf Mobile & Ohio R.R. near Willow Springs. Bids Apr. 11. CD 3/22.

▲ ILLINOIS—Illinois State Toll Hy. Comn., 20 N. Wacker Dr., Chicago,
Central Engineering Co., 2531 Rockingham Rd., Davenport, Iowa, LB $2,085,269. Contr. E-1-A, grading, drainage, paving, appurtenances erecting precast concrete, steel bridges 3.67 mi. beginning W of Deerpath Rd., extending easterly to point W of Rte. 31, Kane Co. Bids Apr. 11. CD 3/22.

▲ Arcole Midwest Corp., 3225 Main St., Skokie, Ill. and M. J. Boyle & Co., 2480 Elston Ave., Chicago, Ill., CA $2,583,780, Section 7D-3 and 7E-3, furnishing, placing, concrete deck, rein.-con. steel handrail pipe drain, Calumet Skyway Toll Bridge, CHICAGO, ILL. City, City Hall, Chicago, Ill. Bids Jan. 28, awarded Mar. 29. CD 2/5, under Illinois State Toll Hy. Comn., as owner.

BUILDINGS—LB & CA

▲ Ohio Homes Dist. Inc., Pippin and Adams Rd. Cincinnati, O., Own Forces, $1,890,500. 140 bsmntless HOMES, Adams and Pippin Rds., CINCINNATI, O. Edward Niemeier, 3818 N. Bend Rd. engr. Awarded Apr. 11.

▲ The Austin Co., 16112 Euclid St., Cleveland, O., CA Est. $10,000,000. design and construct, 4 story, glazed brick, limestone, aluminum and glass PLANT and OFFICE BLDG., air-conditioned, E. 9 and Lakeside Ave., CLEVELAND, O. The Cleveland Press, Rockwell and E. 9 Sts., Cleveland, O. CD 10/23/53.

▲ John W. Galbreath Co., 42 E. Gay St., Columbus, O., Owner Builds, $4,000,000. 400 ranch-type HOMES, WOODSFIELD, O.

▲ Oliver L. Parks Realty Co., Inc., 815 St. William St., Cahokia, East St. Louis, Ill., Owner Builds. $2,500,000. 300 HOMES, St. Joseph Gardens subdivision, incl. streets, sanitary sewers, etc. CAHOKIA (East St. Louis, P. O.) ILL.

▲ J. R. Richards, 438 Brookhurst Dr., Dallas, Tex., CA Est. $2,000,000, SHOPPING CENTER Addn., GLENDALE, WIS. Corrigan Properties, Inc., c/o Boston Store, Lessee, 331 W. Wisconsin Ave., Milwaukee, Wis. CD 3/7.

▲ Macomb Building Co., 101 S. Gratiot St., Mount Clemens, Mich. Owner Builds. $2,000,000. Hall Farms Estates brick HOMES, 2 mi. north of Mt. Clemens, Gratiot and M-59, MOUNT CLEMENS, MICH.

▲ Jannetta Constr. Co., 23945 Grunalt St., Warren, Mich. CA Est. $3,500,000. 250 brick HOMES, Grunalt, Stephens Sts., WARREN, MICH. John W. Duncan, agt., Center Line, Mich.

WEST OF MISSISSIPPI

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS

BRIDGES

April 30 Iowa

STREETS AND ROADS

April 30 Iowa

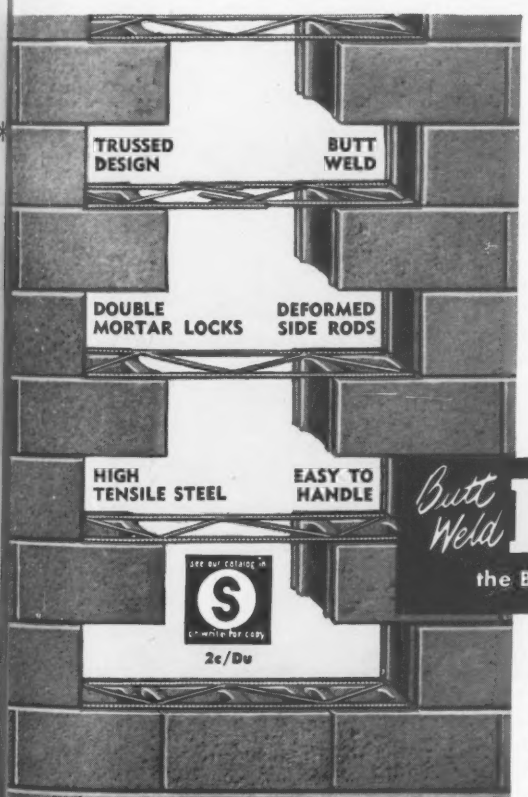

Specified and Available EVERYWHERE!

If an X-Ray picture were taken of a masonry wall, reinforced with Dur-O-waL, you would see the rigid steel at work. Dur-O-waL opens new opportunities for masonry design, assuring flawless beauty through the years. Get the facts about Dur-O-waL, offered by more than 8,000 dealers for prompt delivery everywhere.

Butt Weld DUR-O-WAL® with RIGID TRUSSED Design

the Backbone of Steel for EVERY masonry wall

Call your nearest distributor or write Dept. 3-N for additional information

Dur-O-waL Div., Cedar Rapids Block Co., CEDAR RAPIDS, IA. Dur-O-waL Prod., Inc., Box 628, SYRACUSE, N.Y. Dur-O-waL of Ill., 119 N. River St., AURORA, ILL. Dur-O-waL Products of Ala., Inc., Box 5446, BIRMINGHAM, ALA. Dur-O-waL Prod., Inc., 4500 E. Lombard St., BALTIMORE, MD. Dur-O-waL Div., Frontier Mfg. Co., Box 49, PHOENIX, ARIZ. Dur-O-waL, Inc., 165 Utah St., TOLEDO, OHIO

ON THE NEW INDIANA

American Welded Wire Fabric in the road. Mu
Welded Wire Fabric-reinforce on

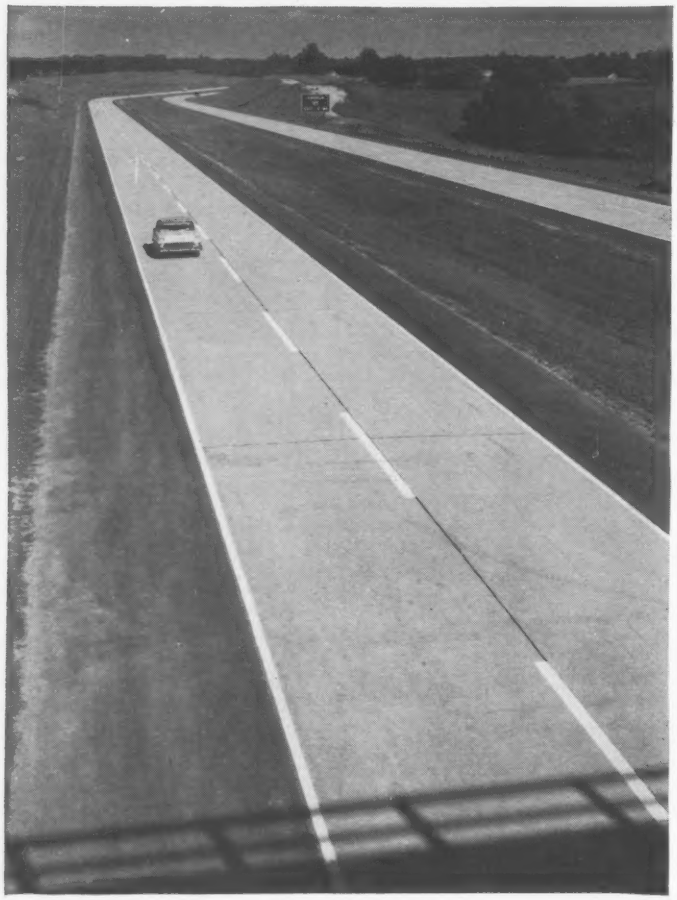

CRACK CONTROL! Since it keeps the road surface smoother, American Welded Wire Fabric helps make the new Indiana Toll Road a *safer* road, as well as a better-riding and more durable road. American Welded Wire Fabric now comes in a complete range of wire sizes up to and including ½" in diameter, 2", 3", 4" and 6" on center.

Why 95% of all toll roa are reinforced with stee

LONGER LIFE—Distributed steel reinfo ment, such as American Welded Wire F ric, extends pavement life because it a 30% to the strength of concrete slabs.

GREATER SAFETY—Steel Wire Fabric inforcement controls cracking, keeps pavement smooth and makes it safer drive on.

LOWER COST—By extending pavement and because Wire Fabric-Reinforced c crete pavements can be built with fe joints, steel reinforcement reduces mai nance costs and lowers long-term cost of concrete road.

SMOOTH RIDING! Specially designed Am ican Road Joints were used on the Indi Toll Road to keep the long slabs in pro alignment and provide an especially smo ride. These joints assure adequate load tra fer for a balanced pavement design.

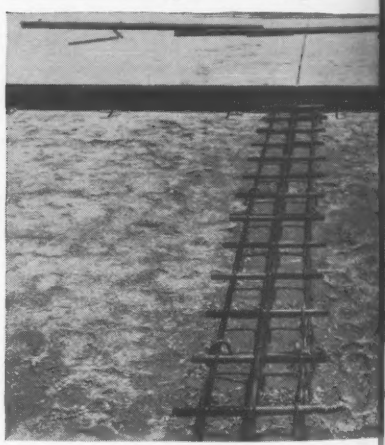

USS American Welded Wire Fabric
USS Multisafty Cable Hi

USS

UNITED STATES STEEL

NATOLL ROAD...

ad. Multisafty Cable Highway Guard along the road...
orce concrete pipe under the road!

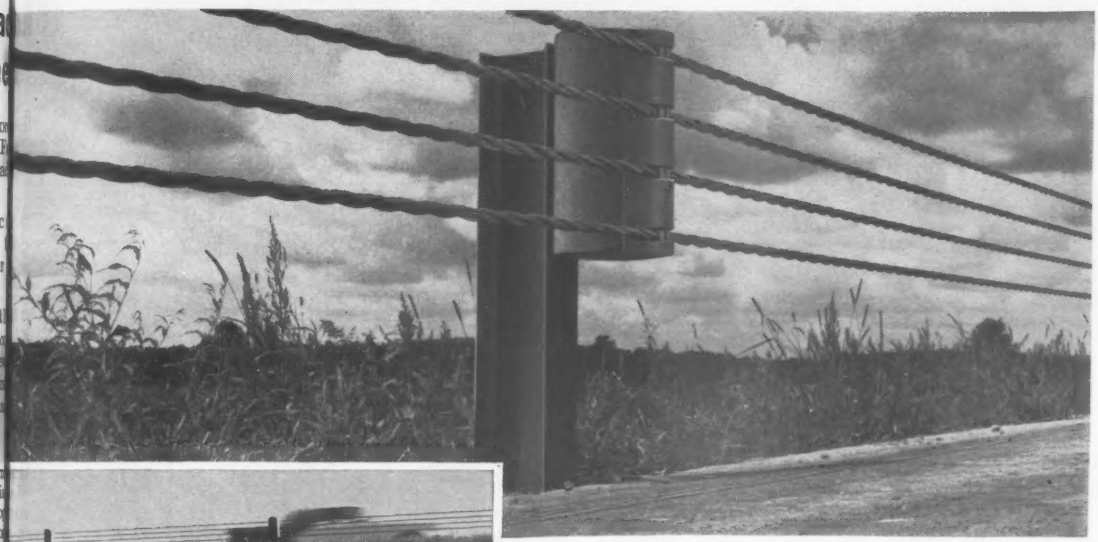

SAFETY, OFF THE ROAD! It is impossible to prevent accidents completely. But here is one way to minimize damage—and injuries: Install American Multisafty Cable Highway Guard along the side of the road, as they did here on the Indiana Toll Road. It is the only guard rail sold that was designed for definite miles-per-hour protection based on extensive testing. The combination of resilient steel cables, plus spring-steel offset brackets, cushions the shock of any collision, and restrains the vehicle, too. American Steel & Wire also makes beam-type highway guard.

GOOD COMBINATION! Portland cement concrete and Welded Wire Fabric reinforcement have been for many years, and remain today, the best and most economical and durable combination of materials for culverts, sewers, and force mains. Wire Fabric Reinforcement gives the concrete culverts on the Indiana Toll Road the greater strength needed for long life.

AMERICAN STEEL & WIRE DIVISION, UNITED STATES STEEL, GENERAL OFFICES: CLEVELAND, OHIO

COLUMBIA-GENEVA STEEL DIVISION, SAN FRANCISCO, PACIFIC COAST DISTRIBUTORS • TENNESSEE COAL & IRON DIVISION, FAIRFIELD, ALA., SOUTHERN DISTRIBUTORS
UNITED STATES STEEL EXPORT COMPANY, NEW YORK

NEW TECHNICAL LITERATURE

The catalogs and brochures describing the uses and advantages of the various construction materials made by American Steel & Wire have been revised and brought up to date. You need the data in these booklets, if you use or build with concrete. Send for your free copies.

ble Highway Guard

American Steel & Wire
Dept. 8C-47, Rockefeller Bldg.
Cleveland 13, Ohio

Please send complete information on the following products:

☐ American Welded Wire Fabric for Portland Cement Concrete ☐ American Welded Wire Fabric for Asphaltic Concrete ☐ American Welded Wire Fabric for Airport Runways ☐ American Road Joints ☐ Multisafty Cable Highway Guard ☐ American Beam-type Highway Guard ☐ American Wire and Strand for Prestressed Concrete

Name .....

Firm .....

Address .....

City ..... State .....

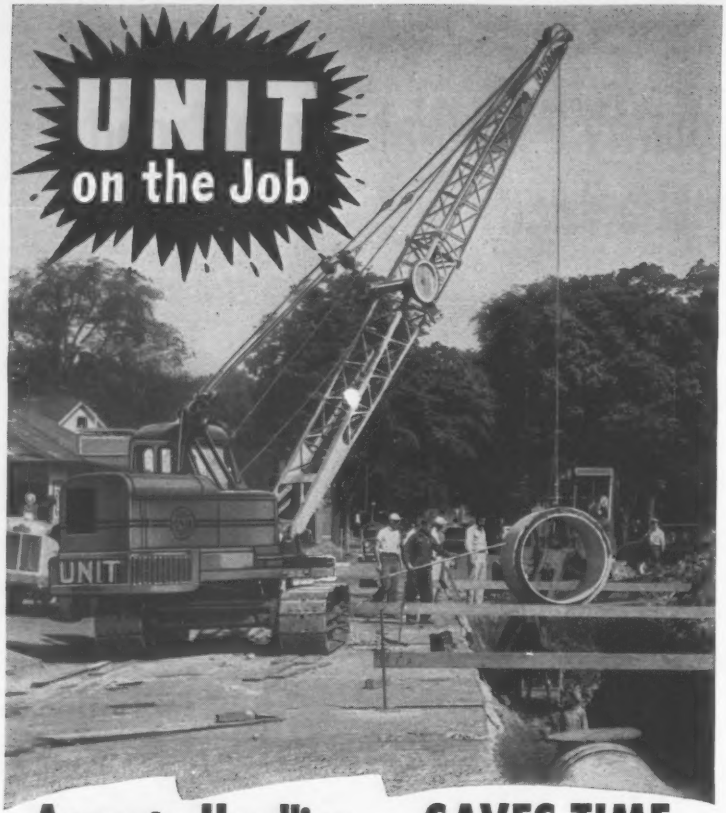

Accurate Handling . . . SAVES TIME

This sturdy UNIT Crawler Crane offers plenty of power plus accurate control. Spots heavy sewer pipe perfectly into the desired position. Adjustable Hook Rollers, Extra Long Crawlers and Wide Multiple Hinged Crawler Shoes provide all-around stability. Full Circle Swing, controlled from within UNIT'S FULL VISION CAB, provides safe and efficient operation. The operator has a complete view of the entire job at all times. GET THE FACTS! Investigate this modern UNIT and its many features. Write today for literature.

UNIT CRANE & SHOVEL CORPORATION
6315 WEST BURNHAM STREET • MILWAUKEE 14, WISCONSIN, U. S. A.

½ or ¾ YARD EXCAVATORS . . . CRANES UP TO 20 TONS CAPACITY
CRAWLER OR MOBILE MODELS . . . GASOLINE OR DIESEL



All Models Convertible to ALL Attachments!

▲† **Texas**—BA 6/15—U. S. Eng., Box 1229, Galveston, rectification and/or imprvs. to Brays Bayou, ENG-41-243-57-52. $2,500,000. CD 4/16, under LB.

HEAVY CONSTRUCTION—LB & CA

▲ **Frederick Snare Co.**, 233 Broadway, New York, N. Y. CA $2,000,000; constr. ore unloading dock, at Point Comfort, PORT LAVACA, TEX. Aluminum Co., America, 1501 Alcoa Bldg., Pittsburgh, Pa. Gra total $4,650,000. CD 10/16, under Earthwor etc.;
Belco Industrial Equipment Div., Inv., Box 213 Houston, Tex., CA $1,500,000; furnishing, installi process piping, Point Comfort (Port Lavaca, Tex.
Tuloma Builders, Inc., Box 7036, Tulsa, Okla., $800,000, power house piping, Point Comfort (Po Lavaca Tex.);
Peterson Bros. Steel Erection Co., 1900 Milby St Houston, Tex., CA $350,000; furnishing, erecti structural steel at 7th potline and erecting 2 gant cranes at ore unloading dock, at Point Comfor (Port Lavaca, Tex.).

▲† **T. C. Bateson Constr. Co.**, Box 7305 Inwood Sta tion, Dallas, Tex., CA $2,632,700. Administrati Bldg., Air Force Academy, IFB 05-613-57-20, CO ORADO SPRINGS, COLO. Dpt. Air Force, Box 167 Colorado Springs, Colo. Bids Mar. 28. CD 4/11, und LB.

BUILDINGS—LB & CA

▲ **Kraus-Anderson, Inc.**, 501 S. Eighth St., Minneapoli Minn. LB $4,428,964 (4 bidders) general constr. story, bsmnt. HOSPITAL, Excelsior Blvd. east Minnehaha Creek, ST. LOUIS PARK, MINN. Ashu Methodist Hospital, V. Spry, supt., 916 E. 15 St Minneapolis, Minn. Bids Apr. 11. CD 2/27.

FAR WEST

BUILDINGS—BA

▲ **Calif., Fresno**—HOSPITAL—BA 6/1—Fresno C General Hospital, c/o Bd. Supervs., County Clerk, Cou House, 6 story, ground floor, type I constr. rein.-co hospital Cedar Ave. near Huntington St. $5,000,00 Horn & Mortland, 2016 Merced St., archts. CD 2/

HEAVY CONSTRUCTION—LB & CA

▲ **CALIFORNIA**—State Div. Hys., 1120 N. St., Sacra mento,
Johnson, Drake & Piper, Inc., 9009 San Leandro St Oakland, Calif., CA $4,935,599. constr. full 8-lan freeway facility on viaduct section involving Madiso St. undercrossing 6th St., outer viaduct 5th and ove head on Eastshore Freeway in Oakland between 0.2 mi. east of Fallon St. and 0.22 mi. west of Marke St., Alameda Co. Bids 4/3, awarded 4/15, CD 4/5 under LB.

▲ **Vido Artukovich & Son, Inc., and Nick Bebek Constr Co.**, 11555 Rush St., El Monte, Calif., LB $2,082, 493 (8 bidders) constr. 60,000 ft. 49 in. pipe feede pipe line for Colorado River Aqueduct, Culver City LOS ANGELES, CALIF. Metropolitan Water Dist. o Southern Calif., 303 W. 3rd St., Los Angeles, Calif Bids Apr. 12. CD 3/25.

BUILDINGS—LB & CA

▲† **Paul Hardeman, Inc.**, 10955 W. Pico St., West Los Angeles, Calif., CA $3,392,000. expanded CORE FACIL-ITY at Naval Reactor Facility, National Reactor Test-ing Station for Westinghouse Electric Corp., ARCO IDAHO. Atomic Energy Comn., Idaho Operations Of-fice, Idaho Falls, Idaho. Awarded Apr. 8. CD 3/13, under LB.

▲ **Jacobsen Constr. Co.**, 421 W. 13 St. S., Salt Lake City, Utah, CA Est. $7,500,000. phosphate rock proc-essing and calcium metaphosphate mfg. PLANT, GEORGETOWN, IDAHO. Central Farmers Fertilizer Co., 608 S. Dearborn St., Chicago, Ill. Torkelson Eng. Co., 146 S.W. Temple St., Salt Lake City, Utah., engr. CD 10/31/55.

CANADA

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS
BRIDGES
May 1 British Columbia
STREETS AND ROADS
April 30 British Columbia

BUILDINGS—SLC

▲ **Que., Shawinigan East**—PLANT—Shawinigan Chemi-cal Ltd., Shawinigan Falls, soon lets contract Plant bldgs., incl. (1) liquefaction and HCl building (2) brine treatment plant (3) saturation pit (4) chlorine storage and loading bldg. (5) tank foundations and trenches, $3,500,000. Grattan D. Thompson, 1241 Guy St., Montreal, archt. Vickers Krebs Ltd., 4975 Notre Dame St. W., Montreal, engrs.

HEAVY CONSTRUCTION—LB & CA

▲ **Perini Ltd.**, 248 Albert St., Ottawa, Ont., CA $3,732,000. air terminal bldg., Ottawa Airport, Up-lands, OTTAWA, ONT. Dpt. Transport, Hunter Bldg., Ottawa, Ont. Bids Mar. 12, awarded Apr. 10. CD 3/19, under LB.

BUILDINGS—LB & CA

▲ **Bennett & White Constr. Co. Ltd.**, 660 Howe St., Vancouver, B. C. CA $2,204,514, rein.-con. Davie Thompson Secondary SCHOOL, 55 and Argyle Sts., VANCOUVER, B. C. Vancouver School Bd. 1595 W. 10 St., Vancouver, B. C. Bids Mar. 5, awarded Apr. 10. CD 3/29, under LB.

(Proposal Advertisements see pp. 138 to 140)

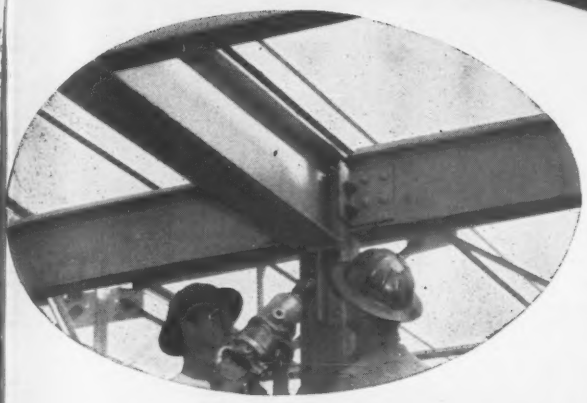

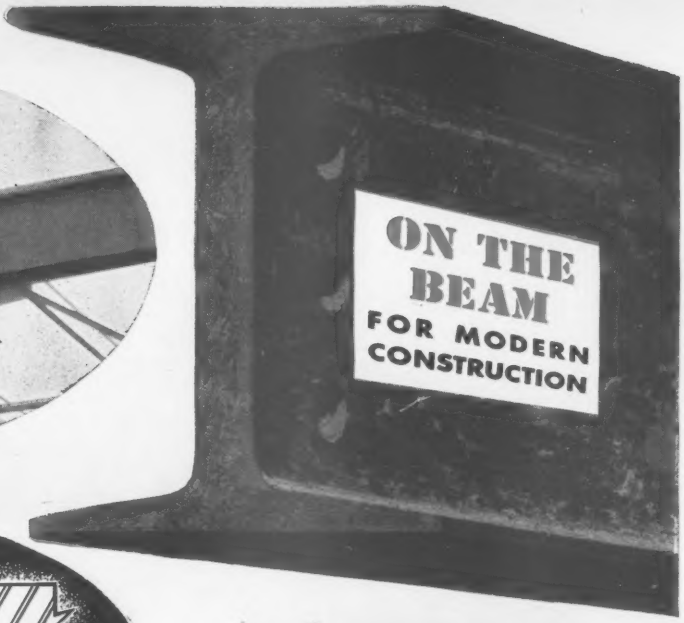

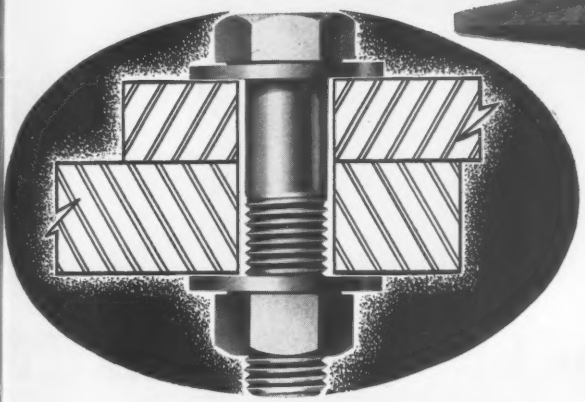

Remember this head for dependable performance

LAMSON

high-strength

STRUCTURAL BOLTS

The importance of knowing the brand and source of High-Strength Structural Bolts cannot be over-emphasized. Assurance of quality, dependability and top performance is a *must* with bolts used in structural steel construction.

Lamson High-Strength Bolts are made from specially selected steel to meet the rigid A. S. T. M. specifications and fulfill the requirements of all building inspection codes.

The "L A-325" on the head is a symbol of reliability and your guide to the finest High-Strength Bolts money can buy. Look for it . . . and be sure of getting Lamson & Sessions proven quality backed by 90 years of fastener experience.

Another Tough Protection Job—Solved by TARSET

THIS oil company river barge terminal near Mt. Vernon, Ind. is a busy place. So busy, in fact, that wooden pilings soon break down under the wear and tear of heavy barge traffic.

Providing more durable docking facilities was accomplished by replacing the wood piling with cylindric steel cells, constructed with steel piling plates driven into the river bed and strengthened with a fill of washed sand and gravel.

But the problem *then* was to protect the cells from corrosion, and from contact with the heavy barges.

Pitt Chem *Tarset* was selected for the job for two principal reasons:

1. *Tarset* is a unique and patented combination of coal tar and epoxy resin. In three years of service history, it has proven extremely resistant to severest moisture conditions.

2. *Tarset's* adhesion to metal is so great that it is virtually impossible to remove except by sand-blasting. So *Tarset* was ideal for resisting abrasion from barge movement.

What's *your* most troublesome corrosive material? Chemicals? Petroleum? Industrial Wastes? *Tarset* has an amazing performance record against all of them. • *Ask for complete information about revolutionary Tarset today! A letter or call will receive our prompt attention.*

COAL CHEMICALS • PROTECTIVE COATINGS • PLASTICIZERS • ACTIVATED CARBON • COKE • CEMENT • PIG IRON

Construction Scoreboard

Activity this Week

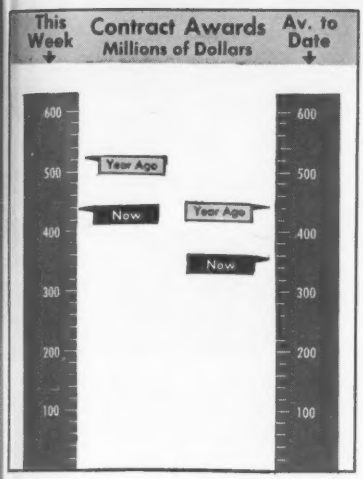

AMOUNT OF CONTRACTS LET

By Ownership	This Week	Cum. 17 wks 1957	Chge %
	millions		
Federal	$44.2	$895.2	+55
State and Municipal	136.7	2,253.1	+11
Total Public	180.9	3,148.3	+21
Total Private	258.7	2,879.1	−43
U. S. Total	$439.6	$6,027.4	−21
By Type of Work			
Waterworks	$3.6	$103.2	+3
Sewerage	8.3	136.2	−37
Bridges	23.7	239.9	+24
Highways	37.3	923.0	+25
Earthwork, Waterways	7.9	347.4	+62
Buildings:			
Public, Excl. Housg.	69.7	727.8	+18
Public Housing	1.8	230.9	+75
Private Housing	81.9	978.7	−55
Commercial	60.9	583.3	−13
Industrial	110.9	1,131.5	−41
Unclassified	33.6	625.5	−4
U. S. Total	$439.6	$6,027.4	−21

NOTE: Minimum size projects included are: Waterworks and waterways, $44,000; other public works, $73,000; industrial buildings, $93,000; other buildings, $344,000.

NEW CAPITAL FOR CONSTRUCTION

	Week of Apr. 18	Cum. 16 wks 1957	Chge '56-'57 %
	millions		
Corporate Securities	$87.8	$2,099.8	+111
State and Municipal:			
All Except Housing	161.5	1,772.0	+25
Housing	...	41.5	+104
Federal Loans	14.4	55.1	+51
Federal Aid	...	...	...
Total Nonfederal	$263.7	$3,968.4	+61
Federal Appropriations:			
In U. S.	...	...	−100
Outside U. S.	...	...	...
Total New Capital	$263.7	$3,968.4	+59

Cost Indexes as of Now

ENR INDEXES (1913 = 100), 20-cities' average	Week of April 18 1957	% Change from March 21 1957	% Change from April 19 1956
Construction Cost	710.70	+0.2	+4.0
Building Cost	501.57	+0.1	+3.2

To convert above indexes to 1926 = 100: Divide Construction Cost by 2.080; Building Cost by 1.850
1949 = 100: Divide Construction Cost by 4.770; Building Cost by 3.518

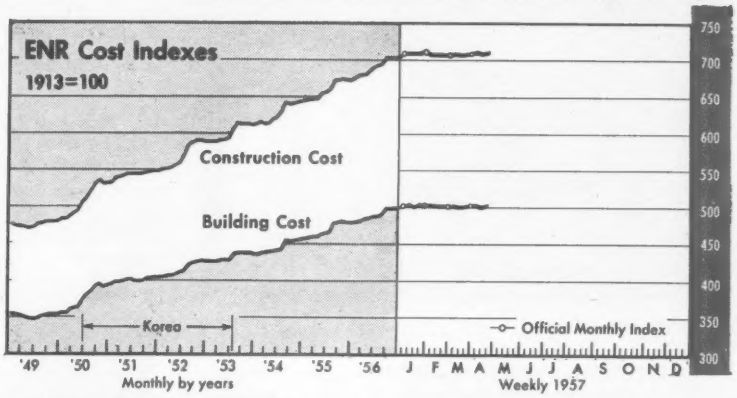

BACKLOG OF PROPOSED HEAVY CONSTRUCTION

	Mar. 31 1957 (millions)	Percent Change from last Month	Year
Total U. S. (ENR reported)	$106,204	+0.5	+8.6
By Ownership—			
Private	44,783	+0.6	+8.8
State & Municipal	47,954	+0.5	+10.6
Federal	13,467	−0.05	+4.7
By Type of Work—			
Waterworks	2,256	+0.6	+10.1
Sewerage	3,292	+1.2	+9.1
Bridges	3,063	−0.1	+8.3
Highways	13,164	+0.1	+14.2
Earthwork, Waterways	11,242	−0.8	−1.2
Public Buildings, including Public Housing	19,208	+1.7	+12.0
Industrial Buildings	16,340	+1.3	+5.7
Commercial Buildings, incl. Private Housing	19,021	+0.2	+16.2
Unclassified, Private	9,422*	+0.3	+0.8
Unclassified, Public	9,196	−0.6	+6.7

* Includes private bridges, $88 million

FLOW OF NEW PROJECTS INTO THE BACKLOG

	1957 Mar. (millions)	1957 3-months (millions)	Percent Change from last Month	Year Cum.
Total U. S. (ENR reported)	$1,749	$5,871	+13.6	−26.8
By Ownership—				
Private	871	3,074	− 0.8	−20.9
State & Municipal	692	2,494	+14.6	−31.2
Federal	186	303	+225.0	−40.2
By Type of Work—				
Waterworks	44	108	+102.1	−5.6
Sewerage	70	186	+64.7	+51.5
Bridges	10	169	−14.8	− 6.0
Highways	147	920	−20.0	+223.9
Earthwork, Waterways	2	58	−96.7	−84.3
Public Buildings, incl. Housing	513	1,110	+78.0	−22.6
Industrial Buildings	447	1,159	+51.8	−39.8
Commercial: Mass Housing	136	843	−24.9	− 2.2
Other Building	246	817	−25.8	+16.3
Unclassified, Private	42	256	−40.6	−43.7
Unclassified, Public	93	245	+32.3	−84.9

FLOW OF PROJECTS OUT OF BACKLOG INTO CONTRACTS

	1957 Mar. (millions)	1957 3-months (millions)	Percent Change from last Month	Year Cum.
Total U. S. (ENR reported)	$778	$2,420	− 4	− 1
By Ownership—				
Private	273	951	−31	−29
State and Municipal	324	1,069	+ 1	+34
Federal	181	400	+96	+36

Reflooring with USS I-BEAM-LOK *solves maintenance problem!*

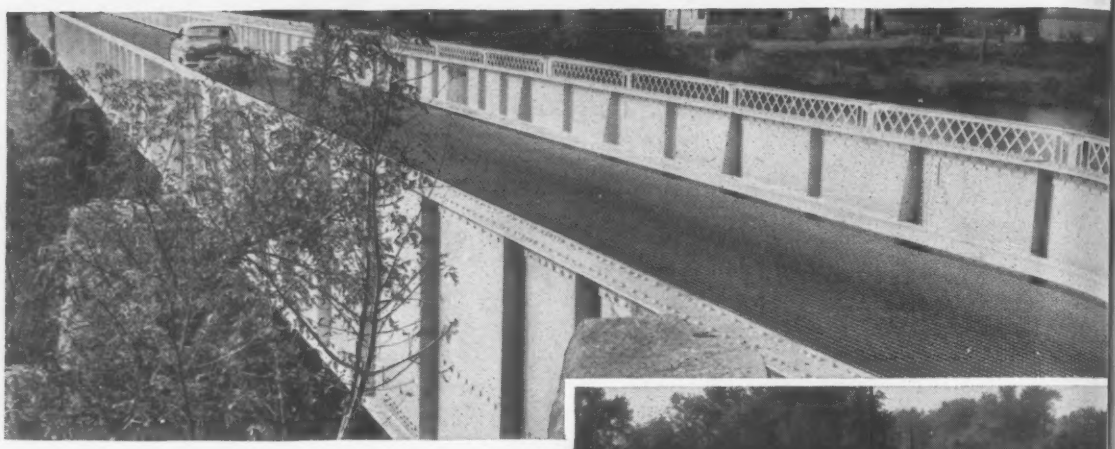

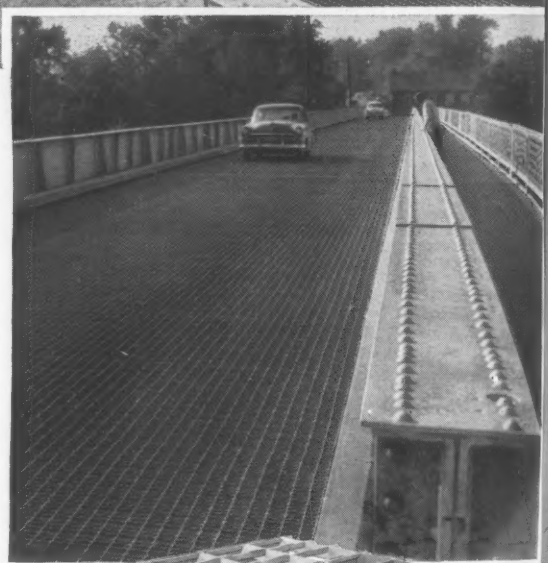

Open-type **USS I-BEAM-LOK** 5″ depth. Weighs 18.8 lbs. psf. Available in units up to 6′2″ wide and up to 49′ long.

THIS OLD BRIDGE at Milton, Pa., was a headache to the Pennsylvania Highway Department. Its heavy concrete slab roadway had been repaired so many times that it was 10 to 12 inches thick on some spans. Its 17′6″ roadway was too narrow. And to make matters worse, the bridge had a curve in it! All of which compounded the problems of dead load, maintenance and safety.

A quick, permanent, weight-saving and money-saving solution to the Milton Bridge problem was found by reflooring with 32,420 sq. ft. of USS AmBridge I-Beam-Lok, the use of which also contributed to the splicing of beams to permit widening 8 spans of the roadway, as well as the fanning out of 3 spans on a curve.

In commenting on this phase of the modernization, Mr. Sanford H. High of the High Welding Company, contractor, says: "The 5″ open-type I-Beam-Lok on this job proved particularly advantageous. It not only provided an easy-to-maintain, all-weather roadway, but also facilitated the widening of the spans because we could lay sections of the flooring temporarily where needed and work from them while cutting and splicing beams. We really moved right along on this job, thanks to the easy way I-Beam-Lok handled."

If you are interested in learning more about USS AmBridge I-Beam-Lok—the modern, lightweight steel flooring—we will be glad to send you our 32-page catalog. Please address your inquiry to the Pittsburgh office.

Pennsylvania Department of Highways, Harrisburg, Pa.
Contractor: High Welding Company, Lancaster, Pa.
Sanford H. High, President

AMERICAN BRIDGE DIVISION, UNITED STATES STEEL CORPORATION • GENERAL OFFICES: 525 WILLIAM PENN PLACE, PITTSBURGH, PA.
Contracting Offices in: AMBRIDGE • ATLANTA • BALTIMORE • BIRMINGHAM • BOSTON • CHICAGO • CINCINNATI • CLEVELAND • DALLAS • DENVER • DETROIT • ELMIRA • GARY HOUSTON • LOS ANGELES • MEMPHIS • MINNEAPOLIS • NEW YORK • ORANGE, TEXAS • PHILADELPHIA • PITTSBURGH • PORTLAND, ORE. • ROANOKE • ST. LOUIS • SAN FRANCISCO • TRENTON
UNITED STATES STEEL EXPORT COMPANY, NEW YORK

USS AMBRIDGE I-BEAM-LOK BRIDGE FLOORING

UNITED STATES STEEL

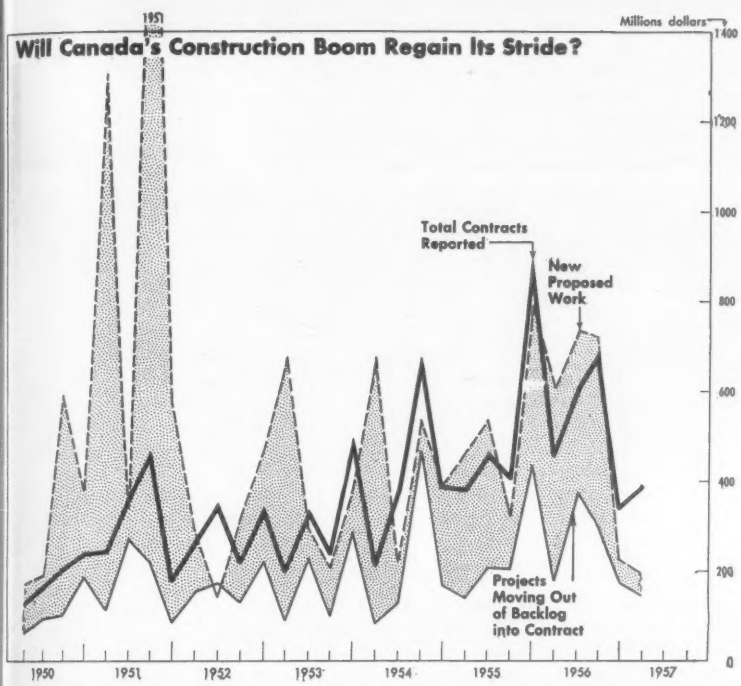

Canadian Awards Down

Contract awards for heavy construction in Canada, as reported by ENGINEERING NEWS-RECORD, closely followed the pattern set in the United States.

Awards of $392 million were down 16% from the same period in 1956, principally because of a 32% drop in awards for private construction. Private awards totaled $219 million.

Public works forged ahead in Canada in the first quarter, just as in the United States. At $173 million, Canadian awards for public work ran 17% ahead of the first quarter of 1956.

But there were important differences between the two nations. For example, in Canada contract awards for industrial buildings were 26% ahead of last year. The U.S. showed a 37% drop in the first quarter. And, highway projects are down in Canada by 36%, while in the United States, first quarter highway awards ran 28% ahead of last year. There was a first quarter drop of 35% for public building awards in Canada; in the United States, this type of work is up.

However both nations show good gains over 1956 for earthwork and irrigation projects, waterworks and public bridges.

Canada's first quarter contracts are up 14% over the low fourth quarter of 1956. But, there has been a sharp decline in new proposed work entering the backlog. This might indicate less contract award activity in the future. At $198 million, the amount of new proposed work entering the backlog in the first quarter was the lowest since the first quarter of 1952 (see chart).

Outflow of projects from the backlog into contracts also has slowed to $147 million, lowest since the first quarter of 1955.

Delay for Tollroad

Defer marketing of bonds; interstate route competes with turnpike extension

The federal interstate highway program in Florida may jeopardize an extension of the new Fort Pierce to Miami tollroad. The planned extension would run 279 miles from Fort Pierce to a point near the Georgia border.

Plans for marketing of $185 million in bonds to finance the extension were deferred by Florida Turnpike Authority Chairman Thomas B. Manuel after traffic and earnings engineers advised the authority that "competition from the proposed interstate system in Florida, if constructed as presently planned, would reduce previously estimated earnings of the Florida turnpike."

• **Disappointing, but not final**—On the basis of this report, the authority asked its financial advisers to delay plans for sale of the bonds "until such time as we have had an opportunity to coordinate our plans with those of the State Road Department." The authority called the traffic engineers' report "disappointing, but by no means final," adding that the State Road Department "has repeatedly stated that we need both the turnpike and the interstate system."

The planned turnpike extension would take the tollroad northwest from Fort Pierce along a route just west of Orlando, then through central Florida northeastward to Tisonia.

Meanwhile, the State Road Department reported its achievements during the past two years.

The department said that during this period it completed 2,455 miles of highways and 72,006 feet of bridges at a cost of $148.1 million. Sixty-four miles of the four-laning of U.S. 1 have been completed, the road department said, and 130 miles are under construction.

For the entire state, 114 miles of four-lane work was completed in the biennium with another 250 miles under way. When completed, the 365 miles of four-laning started during the past two years will bring Florida's total of four-lane highways to 715 miles.

Demand Eases

Cement shipments down, January production cut

Cement mills shipped 11% less portland cement in January of this year than they did in January 1956. Shipments totaled 11.8 million barrels, according to the U.S. Bureau of Mines. Apparent consumption of cement (as judged by shipments) was higher than a year ago in 12 states, lower in 36.

The drop in shipments probably reflects two factors: Poor weather in January throughout most of the nation compelled contractors to change construction schedules; and the decline in contracts in late 1956 and through January 1957 resulted in less demand.

With shipments declining at a faster than seasonal rate, cement mills trimmed production schedules. They produced 19.3 million barrels in January,

operating at 71% of mill capacity, as against an operating rate of 80% in January 1956.

Cement storage silos bulged with 29.8 million barrels of cement. By the end of January stocks were 17% greater than a year ago and were nearly equal to the record high set in March 1956.

For suppliers, the buildup in stocks could dampen enthusiasm over the year's sales prospects. But, for contractors the buildup in inventories points to an easier supply situation in the first half of this year, compared with the same period in 1956.

While contracts for heavy construction other than building are hitting new highs, cement demand for these jobs will not reach a peak until late summe And, until then cement supplies shoul be more than adequate to meet deman

It's also possible that a continuin lag in cement shipments would tempe the cement industry's plans for pric increases, particularly for the thir quarter.

(*B&F continued on page 134*)

Construction Markets

San Diego: An On-the-Spot Report

San Diego, Calif., once dependent on aviation, sailors and sightseers, is coming of age industrially and the area's current building boom seems destined to continue at least through the next four to six months, probably longer.

Southern California's second largest city shapes up as a strong construction market. With industrial building and public works projects leading the way, San Diego is ready to employ labor, buy materials and equipment and retain contractors, engineers and architects' services on an unprecedented scale.

There's one hitch—a familiar one, "tight money." But its effects are felt most in the housing field where the need for new homes is critical and financing is precarious. Some industrial building and some public works projects also are affected, but principally from a standpoint of timing.

San Diego expects its boom to continue despite tight money, a housing shortage, and rising costs of materials, labor and land.

There are good reasons for the boom. One of the fastest-growing metropolitan areas in the nation, San Diego is experiencing the largest peacetime population growth in its history.

This growth has created the need for a $35 million city sewage system (bonds passed); a $35 million second San Diego Aqueduct within the county (bonds being voted upon July 9); some $30 million being expended annually for privately owned utilities; a $25 million city schoolbuilding program (started); other school expansion including $20 million in state funds already earmarked for San Diego State College; some $35 million in freeways, state highways and city street improvements; more than $20 million for two hospitals alone (one under construction); a $9 million port facility (under way); an $8 million courthouse (to start this summer); and plans for a South Bay seadrome and new airport.

A comparable construction program is taking place in industry and in expansion of retail facilities to keep pace with a population that has more than doubled since 1940.

This phenomenal growth has exacerbated the city's housing shortage. Homebuilding is doing well in one sense (contracts are more than 30% ahead of a year ago), but builders claim they cannot get the financing needed to overcome the housing shortage. With credit tight, they say that investors are putting their funds into industrial building.

"We'll hold our own during the next four months," Charles Taylor, executive vice president of the San Diego Contractors and Builders Association, says of housing. But he believes the housing shortage will persist as long as money is hard to get, costs are high and population increases.

Homebuilders face a new round of wage demands May 1 when many of the present building trades contracts expire. If substantial wage increases are granted, builders say this will raise costs and prices, making home financing that much more difficult.

Even so, the housing outlook has a brighter side. San Diego has received an advance commitment from the Federal National Mortgage Association under which Fannie Mae has agreed to take mortgages for $10 million worth of multiple dwelling units. The action will permit immediate construction of at least 1,000 units, according to Ralph Phillips, president of the San Diego Chamber of Commerce.

San Diego's other major problem in the past was its narrow economic base. Dependence on the Navy and aviation industry put the area in a position where a sudden turn in international events could produce widespread unemployment and halt construction programs. This situation is being remedied. An Industrial Development Commission is setting up a master plan for industrial development.

The need for such a program becomes apparent when the Development Commission chairman points out that only 8.3% of San Diego County's population is engaged in manufacturing as against 14% in Los Angeles.

Meanwhile, new industries, such as electronics and plastics, are coming to San Diego. And, the city should gain still further in the nuclear age if plans materialize for a scientific and technical branch of the University of California, as well as the imminent $12 million John J. Hopkins Laboratory for Atomic Research.

General Dynamics, parent concern of the Hopkins Lab and Convair, has further diversified local industry by choosing San Diego as the site for the largest project now being built in the city—the $40 million astronautics plant for missile development. Convair and other major aircraft companies are continuing to expand.

Downtown San Diego is seeking solutions to its bus transit problem and is studying plans for a parking district. And, two companies have announced plans for large buildings (both over $2 million), the first such major improvements in the downtown business district in years.

The city's labor supply has been augmented by newcomers from other states, as total employment in industry increases by about 10% a year. If San Diego can continue to attract new residents (and find housing for them), the construction market should be good not only for the next four to six months but for a long time to come.



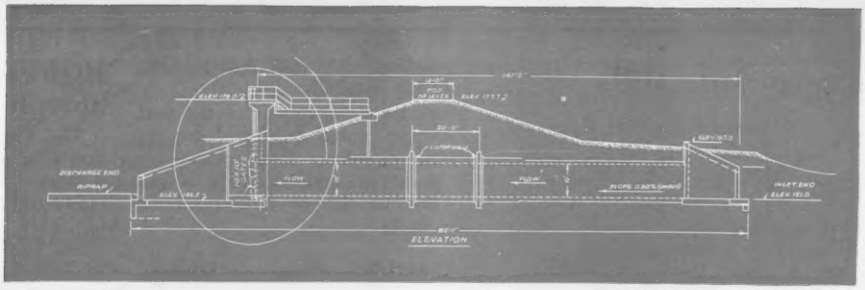

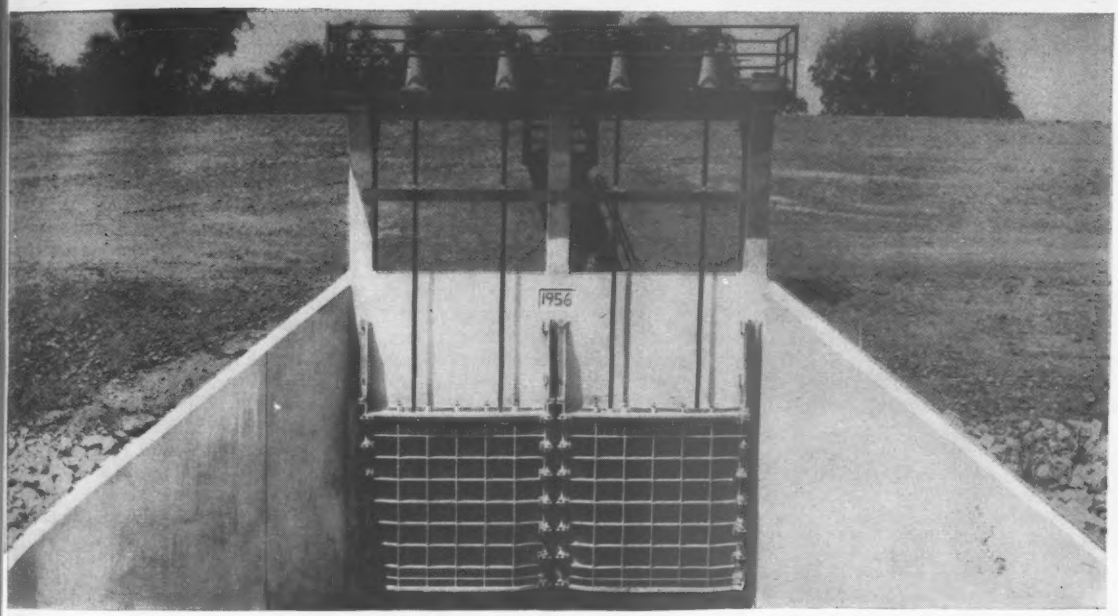

RODNEY HUNT SLUICE GATES
. . . MAKE THE BAYOU BEHAVE

Water control engineering problems are unique in their profound effect upon human lives, health and prosperity.

In this installation, Rodney Hunt engineering and sluice gate design protect more than 80 square miles of farm land. The gates, when open, allow normal drainage to the Bayou River, and when closed prevent flooding as the river goes to flood stage.

The two Rodney Hunt 10-foot by 10-foot cast iron bronze-mounted sluice gates were designed for maximum opening with minimum structure. The installation is unique because inherently rigid flange frame sluice gates with wall thimbles were installed with attaching studs projecting to the front of the frame. This eliminated the need for excessive side clearance and saved on structural costs. Rodney Hunt also supplied precision-built interconnecting floor stands with twin stems on each gate for balanced, smooth operation.

Projects of such importance demand skilled engineering as well as unquestioned product dependability.

RODNEY HUNT MACHINE CO.
Water Control Equipment Division
85 Lake Street, Orange, Massachusetts, U.S.A.

RODNEY HUNT®

SERVING WATER CONTROL ENGINEERS WITH SLUICE GATES AND ENGINEERING

Upturn Aids Mills

Fir plywood market firms; orders set 15 week record

Douglas fir plywood mills are riding a wave of new orders.

Bookings have increased sharply in the past five weeks and order backlogs now are the highest since last October, according to Douglas Fir Plywood Association figures.

This rise in orders has pushed the 15 week total in 1957 to nearly 1.5 billion sq ft (on a ⅜ in. rough basis). That's a 3% increase over the 1956 period and is a slight 0.4% more than 1955's previous high for the period.

Total backlog of orders, as of April 13, was slightly more than 350 million sq ft.

Mills have increased production sharply to match the upturn in orders. During the first week of March, mills operated at a low 73% of capacity; during the week ended April 13, mills raised their output by operating at 86.8% of capacity.

Production during the week ended April 13 totaled 108.1 million sq ft, slightly higher than in the corresponding week of 1956. However, total production to date in 1957 is lagging 6.3% behind last year's all-time high. During the first 15 weeks of the year, Douglas fir plywood mills produced a total of 1.48 billion sq ft.

Exterior plywood production is down 5.8% from the comparable 15 week period in 1956, but it tops 1955 by more than 7%.

Port Authority Suggested For State of Mississippi

Creation of a Mississippi Ports Authority, under which the state would assume ownership and operation of all ports that are located on the Gulf Coast and on the Mississippi River, has been recommended by a legislative port study committee, which will make a formal report to the full legislature next January.

The committee calls for a $15 million bond issue for development of the port at Gulfport, but makes no specific recommendation at this time on the port at Pascagoula, where Jackson County and the City of Pascagoula currently are engaged in a $4.5 million development program.

Under the proposal, a seven member port authority would be appointed by the governor to oversee development of all state owned ports.

A State Dock Board also would be established if citizens of Gulfport and Pascagoula voted to turn their facilities over to the state.

Bonds for development of the port at Gulfport would be issued by the Dock Board, subject to approval of the Port Authority, and would be retired from revenue derived from operation of the docks.

$15 Million Cement Plant Planned by Public Utility

A $15 million cement plant, with an annual capacity of 1.5 million barrels, will be built at Foreman, Ark., by the Arkansas Louisiana Gas Co.

The plant will be built by a wholly owned subsidiary and will be in operation in about 18 months.

The gas company became interested in operation of a cement plant because the plant would use natural gas in warm weather, when the utility's customers normally require less service. The plant will give Arkansas Louisiana Gas a daily market for about 10 million cubic feet of gas which it has been forced to sell at bargain rates in the past as "dump gas."

The site of the plant, at Foreman, is 185 miles from Little Rock, in southwest Arkansas, near the Oklahoma and Texas borders. The site was chosen because of extensive deposits of chalk formations in a 2,000 acre tract.

Novices Called Major Factor In Contractor Failure Rate

A major factor in the rising rate of failures among construction contractors "is the bloody and destructive competition set off frequently by novices —the tyros in the business," according to a recognized surety expert.

Warren N. Gaffney, General Manager of the Surety Association of America, voiced his criticism of inexperienced contractors during a meeting of the National Association of Surety Bond Producers.

Pointing out that not all contractors who fail are bonded, Mr. Gaffney said that contract bond losses alone totaled $32 million in 1954 and $44 million in 1955. (These compare with current liabilities reported by Dun & Bradstreet of $56.8 million in 1954; $83.2 million in 1955 and $100.2 million in 1956. Contract bond losses for 1956 are not yet available.)

Figures showing contractor failures also do not include contractors who received financial assistance from the sureties in order to complete a job, and thereby avoid a default, Mr. Gaffney explained. Yet, these too have been victims of the bitter competition in many cases, he added.

Highway Cost Index Up Sharply in California

The California Highway Construction Cost Index rose sharply in the first quarter. The index stands at 277.7 (1940-100), which is 25.5 index points or 10.1% above the fourth quarter of 1956. Compared with the same period in 1956, the index shows a 22% increase in construction costs.

However, the State Highway Department commented that the sharp rise in the first quarter of this year was due partly to "conditions surrounding two extremely large contracts totaling $12.2 million that were awarded during the period." Unusual problems encountered on these two projects distorted the cost picture, the department said. Excluding these two projects, the index actually would have been 1% below the fourth quarter of 1956.

Business Briefs . . .

• **New York housing down**—A 38% decline in new private housing units authorized or started in New York State was reported for February. State Housing Commissioner, Joseph P. McMurray, said 2,798 units were authorized or started during February of this year as against 4,485 units in February 1956. The figure for February 1957 represented the lowest amount of new homebuilding activity for that month in the past eight years.

• **DuPont increases spending**—Construction expenditures of the duPont Co. this year probably would be at a higher level "perhaps over $200 million" than the all-time record of $157 million in 1956, Crawford H. Greenewalt, president, told stockholders last week.

• **Equipment maker expands**—A new West Coast plant of Yale & Towne's Materials Handling Division will start production in August of the Trojan line of earth-moving equipment now manufactured only at the contractor's Machinery Division plant at Batavia, N. Y. The new plant will also produce fork lift trucks.

• **Slum clearance bill**—The North Carolina legislature has started action on a bill that would give all cities and towns in the state power to condemn and resell or rehabilitate slum areas when two-thirds of the buildings in the area are substandard.

• **Close competition**—A bid margin of 87,432 less than 1%—on a $10 million contract—separated low bidder Peter Kiewit Sons from second low Western Contracting Corp. for a runway improvement job at Minot, N. D. Air Force Base.

-HMOND REFERENCE GUIDE FOR YOUR CONCRETE CONSTRUCTION NEEDS

CUT OUT AND FILE



3000 lb
5000 lb
SNAP-TYS
Light Wall Forms
1 4

½" to 1½"
2 STRUT
TYSCRUS
Heavy Wall Forms
1 2 3 4

1" to 1½"
4 STRUT
TYSCRUS
Mass Concrete Forms
2 3



to 1½"
CONTINUOUS
THREAD
LAGSTUD
Adjustable Connectors
1 2 3 4



½" to 1½"
TYLOOPS
Form Anchorage
3

⅜" to 1½"
SCREW ANCHORS
AND BOLTS
Anchorage to Concrete
2 3

-1½"
WHIRL-WIND
ANCHORS
(No Slip)
Lift Form Anchorage
3



¼" to ¾"
THREADED INSERTS
Fastening to Concrete
1 2 3 4

⅝" - ¾"
PEERLESS WEDGE INSERT
Shelf Angle Support
1

SNAP-TY
HANGER
Hanging Light Forms
1 4

½" to 1
TYHANGER
Hanging Heavy Forms
1 2 4



HANGER
FRAME SCREED
Form Hanging
and Screeding
2

ADJUSTABLE
SCREED CHAIR
Screeding Slabs
1 2 4

REINFORCING
BAR SUPPORTS
Steel Support
1 2 3 4



⅜" - ½"
TILT-LOCK
ASSEMBLIES
Fast Acting She-Bolts
2 3 4

TYFRAME
Stadium Forms
1



DOWEL
SUPPORTS
Road Joint
2

LOAD
TRANSFER
ASSEMBLIES
Airport Slabs
2

buildings 1

roads & bridges 2

tunnels & dams 3

water & sewage PLANTS 4

The above is a partial showing of the 358 items contained in the Richmond line of engineered concrete form-tying devices, anchorages and accessories—the largest line in the field. All items are designed for specific uses, not only for the fields pictured above but also for the building of *stadiums, grand stands, auditoriums, retaining walls, curtain walls, silos,* etc.

Whatever your concrete construction needs, contact Richmond. Richmond products are engineered to give you extra strength, ease of handling, utmost economy. Write for complete catalogue. If you have a specific problem, Richmond's Technical Division or field service men will be glad to submit drawings, engineering data and proposals. Address:

RICHMOND SCREW ANCHOR CO., INC. — 816 Liberty Ave., Brooklyn 8, N. Y. and 315 South Fourth St., Saint Joseph, Mo.

INSIST ON RICHMOND
...AND BE SURE IT'S RICHMOND!

Richmond
SCREW ANCHOR CO., INC

816-838 LIBERTY AVENUE · BROOKLYN 8, N Y
315 SOUTH FOURTH ST · ST JOSEPH MO

RICHMOND REFERENCE GUIDE FOR YOUR CONCRETE CONSTRUCTION NEEDS

Teamsters Condemn Beck Suspension

Union's Executive Board challenges the validity of AFL-CIO action, but Meany remains unmoved

While Senate investigators were turning attention last week to building trades' activity in Scranton, Pa., top brass of the teamsters union gathered in Texas to consolidate their forces.

Meeting in Galveston, the union's Executive Board unanimously condemned as illegal the AFL-CIO suspension of teamster chief Dave Beck as federation vice president and council member, and charged the AFL-CIO's pending investigation of the union on corruption charges, as now set up, violates the union's right to a fair trial.

Result of the action is to widen the cleavage—both legal and ideological—between the teamsters and the AFL-CIO. And this, in turn, more clearly places the ultimate decision on the fate of both Mr. Beck and his union on the shoulders of rank-and-file members.

Tactical in nature, the Galveston meeting was called to chart the union's course in the hearings scheduled by the AFL-CIO following Mr. Beck's recent refusal to answer questions before the Senate investigating committee. First hearing, set for May 6, is concerned with the question of whether corruption exists among the teamsters and, if so, whether it is sufficient to suspend or expel the union from the AFL-CIO. The second hearing relates to Mr. Beck's fitness to continue as an officer of the AFL-CIO and is scheduled for May 20. (Mr. Beck's status within the teamsters union itself cannot be directly controlled by the federation.)

Decisions taken at the Galveston meeting were two:

- To appoint a committee to confer with the AFL-CIO on the May 20 hearing.
- To refuse to appear at the May 6 hearing unless and until procedural changes—such as formal written charges, the right to confront accusers and the right to cross examine—are made.

In reply to the teamsters' action, AFL-CIO President George Meany stated that the hearings would stand as scheduled and indicated that the federation will not compromise its position by bargaining with the teamsters.

• Cleavage—On both fronts, a sharp line again has been drawn between personal legal rights and the enforcement of trade union morality.

Teamster officials have expressed the view that the Bill of Rights, like the Magna Charta, sought to protect the individual against despotism and tyranny. It not only prevents Congress and the AFL-CIO from conducting inquisitions and Star Chamber proceedings, they contend, but also makes unlawful the AFL-CIO code under which unionists who invoke the Fifth Amendment can be ousted from office. Coupled with this is a union emphasis on the legal concepts that individuals cannot be tried in a prejudicial atmosphere or by biased judges and that the presumption of innocence prevails until guilt is proven.

Mr. Meany, on the other hand, has indicated that the legal rights of an individual as a citizen cannot be the controlling factor in the federation's enforcement of its "own law of trade union ethics." The AFL-CIO codes, he has said, seek to assure that the labor movement conforms to the highest concepts of morality, and, as a "practical" matter, are designed to guard labor against the "risk of adverse publicity." In fulfilling its pledge to keep the labor movement free from corrupt influences, Mr. Meany has observed, the AFL-CIO must proceed under its own law, often acting before public law has run its course and leaving the questions of constitutional rights and of individual guilt or innocence under public laws to be settled within the framework of the nation's judicial system.

• Rank-and-file—Even more significant are the divergent views on the crucial role to be played by union members at the grass-roots level. For these are the people who may be asked to decide whether the teamsters will cross the Rubicon by giving office to or withholding it from those members touched by the taint of corruption.

In an open letter in the April issue of the teamsters' journal, Mr. Beck, who plans to run for re-election, infers that there is no discontent among rank-and-file members over the way union matters are being handled because teamsters are satisfied with the results—wages that mean an annual income $600 higher than it was five years ago, better fringe benefits, shorter hours and, in some cases, work or wage guarantees.

Mr. Meany, however, has said he does not "subscribe" to such a thesis and at the recent auto workers' convention predicted that the American worker's interest in his union and in what it stands for will rise above a purely economic evaluation.

But members of Sen. John McClellan's investigating committee have begun to publicly question which way the wind will blow. Last week's hearings underscored the fact that four convicted construction union members in Scranton still hold union office. Said Senator McClellan: "I'm interested in knowing what's going to be done about convicted criminals who are officers of unions." Are they, he asked, going to remain in the union?

Should the retention of such officers become the practice in the teamsters union, it may lead to the union's expulsion from the AFL-CIO. So far, however, teamster leaders have disavowed any intention of becoming an independent union.

And this leads to another dilemma with which the AFL-CIO soon may be faced. Al Hayes, who heads the federation's Ethical Practices Committee, has made this observation: "In a very real sense, the expulsion of a wayward affiliate from the AFL-CIO does not solve the problem of unethical practices at all. It is sort of a handwashing ritual . . . the situation continues to exist." Real remedy, he declared, lies in arousing union members to exercise their rights—a remedy which expulsion itself may not promote.

District Fifty Attacks Taft-Hartley Proposals

A sharp attack on the construction industry's proposed amendments to the Taft-Hartley Act has been made by the United Mine Workers' District 50, which embraces the construction workers' division of John L. Lewis' independent union.

In an editorial in a recent issue of its official publication, District 50 asserts that the proposals "would give Brother Gray and his building trades 'empire' about as tidy a little monopoly as one could hope to find anywhere". Mr. Gray is president of the AFL-CIO Building and Construction Trades Department.

The proposal singled out for special criticism is one that would permit certification of construction unions with-

out prior elections, provided there is an existing history of collective bargaining between the union and the employer (ENR Mar. 28, p. 117). According to District 50 this proviso would present an effective roadblock to the continued expansion of its United Construction Workers because UCW in many instances wouldn't be able to meet that requirement. The result, it says, is to give the AFL-CIO building trades a monopoly, while leaving the shackles of the law on their rival union.

District 50 also argues that "this is no time for amendments" because of the anti-labor atmosphere created by the Senate Select Committee investigations. It considers it unlikely that Congress would be in a mood to limit its consideration to the industry proposals.

Apprentice Deficit Still Exists

Sheet metal workers score the highest mark, but many trades are failing to meet their journeymen losses

While the construction industry in Montreal is building what may be the biggest apprenticeship training center in the world, U. S. contractors and construction unions are finding little room for complacency in the net results of their own efforts to add new members to the skilled labor force.

According to the U. S. Labor Department's Bureau of Apprenticeship and Training, the number of apprentices turned out last year by the carpenters, iron workers, cement masons, painters, paperhangers and glaziers, for example, fell far short of replacing journeymen lost to the trades through death, retirement and disability. This occurred in the face of the construction industry's continuing need for additional craftsmen, now significantly bolstered by scheduled expansions in the highway and heavy construction fields.

• **The 1956 picture**—Taking the industry as a whole, however, the over-all picture for 1956 is not so bleak. The year marked a general improvement in the balance between apprentices and journeymen in the building trades.

Here are some of the 1956 highlights as reported by Carl Easton in the March issue of "Construction Review", published by the U. S. Departments of Labor and Commerce:

• Best record was made by the sheet metal workers union, in which apprenticeship completions were twice as great as the number of journeymen lost—the union now has a ratio of one apprentice to every seven journeymen. Electrical workers and roofers starred next. These three trades accounted for more than a quarter of all construction trades apprentices registered in mid-1956.

• The bricklayers—now shooting for a ratio of one apprentice to every five journeymen—ended up with more than enough apprentice graduates to replace their journeymen losses, and the plumbers and pipefitters just held their own. But plasterers and cement masons failed to cover their losses even though they had improved their ratio of apprentices to journeymen (it's now 1 to 12.6).

• Over the last five years, carpenters have been losing twice as many journeymen as they've been getting through apprenticeship, and in the painting and paperhanging trades journeymen losses have exceeded apprenticeship completions by three to one.

• **Other pressures**—In addtion to filling the gaps that naturally occur in labor's ranks as well as as meeting the numerical needs of a more demanding future, contractors and unions are, meanwhile, trying to keep abreast of the changes in technology and tastes that require constant revisions in training.

The bricklayers, for example, now see a shortage of stone masons stemming from the increasing use of building stone. Since they feel that in many communities the amount of available work does not warrant the training of an exclusive stone mason apprentice, officers of the International Union are urging mixed locals to see that bricklaying apprentices are given some practical and related training in stone masonry. They also are urging the promotion of full stone masonry apprenticeship, where practicable, and the use of stone masonry extension courses for journeymen bricklayers.

Pushed by the pride of craftsmanship and the economic incentives of self-preservation, better jobs and higher pay, other unions are also emphasizing journeymen training. Addressing himself to this problem and to the new jobs that flow from modern electrical methods, Gordon Freeman, President of the International Brotherhood of Electrical Workers, last month had this to say to his members: "These jobs belong to us—but—only if we are ready for them. If we are not ready for them, if we are passed by now because we lack the ability, if we miss this chance to get in on the ground floor, we may never get another opportunity. We must not, we cannot, let a comparatively few hours of advanced training cheat us of such opportunities. The time to act is now."

• **Montreal enterprise**—To obtain the physical facilities for coping with their own apprenticeship problem, the Montreal construction industry and the provincial government have launched a $1.1 million expansion of the Montreal Apprenticeship Center of the Building Trades. Three new additions now are being built and a recreation center is being planned.

Cooperating in the enterprise are the Builders' Exchange and the Apprenticeship Commission. The commission is a corporation established under the Apprenticeship Assistance Act. Its 23 members represent management and labor (10 members each) and the Quebec government (three members). Purpose of the corporation is to provide apprentices with vocational training facilities and to promote apprenticeship standards in the building trades.

Pre-employment vocational training is given by the Montreal center to apprentices in the 16-25 year-old group in bricklaying, carpentry, electricity, sheet metal, painting, plastering, plumbing, heating, refrigeration, welding and tile setting.

Industrial Union Dispute

The AFL-CIO has put the brakes on efforts of the sheet metal workers union to gain jurisdiction over work performed by steelworkers at Burt Manufacturing Co. in Akron, Ohio.

Another manifestation of the craft-industrial union conflict that has plagued the AFL-CIO merger, the jurisdictional dispute has been brewing for over a year. Ventilators and other products produced by Burt have been boycotted by the sheet metal workers (ENR Feb. 7, p. 136). The AFL-CIO Executive Council, at its mid-winter meeting in Miami, appointed a three-man committee to recommend a solution. That committee now has ruled that the sheet metal workers' action constitutes union raiding and violates the AFL-CIO constitution.

(*Labor continued on page 138*)

Seek Ban on Part-Time Jobs for City Workers

The conflict of interest between AFL-CIO building tradesmen and city employees seeking part-time work during their off-duty hours is being aired again —this time in Cincinnati, Ohio.

The Cincinnati Building and Construction Trades Council has requested an ordinance prohibiting municipal employees from doing outside work.

Joining the opposition to the union request, City Manager C. A. Harrell has taken the position that city workers "should be able to use their free time to their own advantage on an equal basis with employees of private industry." He cited the following figures in answer to BTC charges that outside jobs for city employees work a hardship on the unemployed: Of the 642 municipal workers who have had outside jobs recently, 78 were Christmas season workers, 83 worked less than eight hours each week, and only 22 obtained jobs in the building industry.

Bulk of Labor Disputes Are Settled Peacefully

Arbitration clauses are now included in 95% of all the 125,000 collective bargaining agreements in effect, a group of labor relations officials was told this month at an arbitration institute held at Vanderbilt University, Nashville.

This means that tens of thousands of labor disputes, the majority of which concern discipline and discharge, are arbitrated every year, according to Joseph S. Murphy, vice president of the American Arbitration Association.

The arbitration institute, first of its kind in Tennessee, was sponsored by the American Arbitration Association and the Vanderbilt Law School. Delegates from 36 cities in four states attended.

Mr. Murphy said that "strikes make good newspaper copy while peaceful settlements get little or no attention," thus accounting for "the lack of public awareness of the growth of the peaceful settlement method."

During the course of the institute Federal Mediator Joseph Finnegan said the stress by the Eisenhower Administration on voluntary mediation and arbitration has strengthened the ability of the Federal Mediation and Conciliation Service to resolve disputes. "The mediator is often of assistance in aiding one party or the other to retreat from an over-extended tactical bargaining situation," Mr. Finnegan said. The key to settlement, he stated, is often simply that of having someone to help "to do it gracefully."

OFFICIAL PROPOSALS

APPEAR HERE EACH THURSDAY. PROPOSAL ADVERTISEMENTS ACCEPTED UP TO 10:30 A.M. FRIDAY FOR THE ISSUE DATED THE FOLLOWING THURSDAY.

Bids: May 7, 1957

Power Authority of the State of New York Barnhard-Plattsburgh Transmission Project

ADVERTISEMENT FOR PROPOSALS
FOR
THE FURNISHING AND DELIVERY OF STRUCTURAL STEEL FOR SUB-STATIONS
SPECIFICATIONS NO. PA-6-38
CONTRACT NO. TP7

NOTICE TO CONTRACTORS: THE POWER AUTHORITY OF THE STATE OF NEW YORK will receive sealed proposals for the shop detailing, fabrication, and furnishing of structural steel for the sub-stations for the Barnhart-Plattsburgh Transmission Project and delivery thereof f.o.b. destinations, until 10:30 A.M., Eastern Daylight Saving Time, on the 7th day of May, 1957, at the Authority's office, 270 Broadway, Room 1305, New York, New York, at which time and place the proposals will be publicly opened and read aloud.

Bids will be received for the structural steel for the Plattsburgh and Kents Falls Substations in accordance with the bidding schedules. Estimated quantity for Plattsburgh Substation 80 tons; for Kents Falls Substation 45 tons. Erection at the site of installation will be done by Others. Delivery will be required starting September 15, 1957.

Plans, Specifications and Proposal Forms for the work will be on file in the Authority's office and in the offices of the Engineer, Uhl, Hall & Rich, 230 Congress Street, Boston 10, Massachusetts; may be inspected by prospective bidders during office hours; and may be obtained from the Power Authority of the State of New York, 270 Broadway, Room 1300, New York 7, New York, upon application and prepayment of a fee of Ten ($10.00) Dollars per initial set of contract documents and Five ($5.00) Dollars per set for additional sets, no part of which will be refunded. Two sets must be returned with each bid.

Bids will not be restricted to American Manufacturers.

Bids must be made in duplicate in accordance with the instructions contained in the Information for Bidders. Guarantee will be required with each bid in an amount not less than ten per cent of the gross sum bid.

The right is reserved to reject any or all bids.

W. S. CHAPIN
GENERAL MANAGER

U. S. Government

DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids (Specifications No. DC-4897) will be received at Vernal, Utah, until June 4, 1957, for furnishing labor and materials for highway, streets, utilities, and residences for Flaming Gorge Community Facilities, Colorado River Storage Project, Utah-Wyoming. Location near Linwood, Utah. Principal items are 325,000 cu. yds. excavation for highway, streets, residences, and utility trenches; constructing 80 wood-frame residences; constructing sewage, gas line, water, and electrical distribution systems; and other work. Completion time 550 days. For particulars, address Bureau of Reclamation, Vernal, Utah; or Building 53, Denver Federal Center, Denver 2, Colorado. W. A. Dexheimer, Commissioner.

Bids: May 21, 1957.

City of Richmond, Virginia

NOTICE TO BIDDERS

Sealed Proposals will be received at the office of the Director, Purchases and General Services, 4th floor, Mosque Building, Laurel and Main Streets, Richmond, Virginia, until but not later than 11 o'clock A. M. E.S.T., May 21, 1957, at which time they will be publicly opened and read aloud, for the following work which may be awarded in whole or in part:

Type of Work: The work to be done is part of the Sewage Disposal Project, entitled "Division V—Outside Piping and Miscellaneous Structures", and comprises the furnishing of all labor, materials, equipment and work incidental thereto for the construction of the sludge beds, sludge lagoons, outside piping, railroad siding and miscellaneous structures, as shown, specified and directed.

Location: The Outside Piping and Miscellaneous structures will be located at the site of the Sewage Treatment Plant, adjacent to the southwest bank of the James River at Rockett's Wharf, northeast of the United States Naval Diesel School, in the City of Richmond, Virginia.

The proposal and other contract documents may be examined at the office of the Director of Public Works, 217 Governor Street, Richmond, Virginia, and at the office of Greeley and Hansen, Engineers, 220 South State Street, Chicago 4, Illinois. Copies of the contract documents may be obtained from the office of the Director of Public Works upon the deposit of Twenty-Five Dollars for each set. Any general contractor who submits a bona fide bid on the project will be refunded his payment in full for not more than three sets, and will be refunded fifteen dollars per set for each additional set. All others will be refunded fifteen dollars per set upon the return of the documents in good condition within ten days after the opening of the bids.

J. W. Huffman
Director of Purchases and General Services

U. S. Government

DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids (Specifications No. DC-4894) will be received at Oak View, California, until May 22, 1957, for furnishing labor and materials for modifications of pressure reducing stations and meter stations along pipe-line distribution systems, Cachuma Project, California. Location near Santa Barbara, California. Principal items are lump sums for furnishing and installing materials for modifications of pressure reducing stations and meter stations. Completion time 360 days. For particulars, address Bureau of Reclamation, P. O. Box 97, Oak View, California; or Building 53, Denver Federal Center, Denver 2, Colorado. W. A. Dexheimer, Commissioner.

On or about May 7, 1957, bidding material for construction (except elevators) State Department (extension and remodeling) at Washington, D. C., will be available for distribution to general contractors. Applications from general contractors interested in bidding on this work, for not to exceed 7 sets of drawings and specifications, should be filed promptly with this office and the bidding material will be forwarded as soon as available. Bids will be opened on the date named in the Bidding Forms, which will be June 18, 1957. Bidding material will be available at Room No. 1304, General Services Building, 19th and F Streets, N.W. Washington 25, D. C., Phone EXecutive 3,4900, Extension 2397. Commissioner of Public Buildings, General Services Administration.

OFFICIAL PROPOSALS

Bids: May 16, 1957.

New York State Road Work

NOTICE TO CONTRACTORS: STATE DEPARTMENT OF PUBLIC WORKS, ALBANY, N. Y.,—Pursuant to the provisions of the Highway Law, Article 2, Title 9 of the Public Authorities Law, and special provisions for projects financed with Federal Aid Funds, sealed proposals will be received until ten-thirty o'clock A.M., advanced standard time, which is nine-thirty o'clock A.M., eastern standard time, on the 16th day of May 1957, by Henry A. Cohen, Director, Bureau of Contracts, 14th Floor, The Governor Alfred E. Smith State Office Building, Albany, N. Y., for the following projects:

County	Contract No.	Name	Miles	Type	Deposit	Estimated Cost of Work
DISTRICT No. 1, G. L. NICKERSON, District Engineer, 353 Broadway, Albany, N. Y.						
Albany (Rte. 85A)	R.C. 57-50	North, S.H. 124	0.31	Asp. Conc., Opt. = 0.28 Mi. Misc. Work = 0.03 Mi.	$2,000 Plans $10	$38,000
Essex (Rte. 9)	FARC 57-51	Schroon Lake–North Hudson, Pt. 2, S.H. 5180 Project F-383(11)	0.74	9" Cem. Conc. Pavt. 24' Wide = 0.69 Mi. Misc. Work=0.05 Mi. Reinf. Conc. Closed Boxed Br. 30'	$21,000 Plans $10	383,000
DISTRICT No. 2, LACY KETCHUM, District Engineer, 109 No. Genesee St., Utica, N. Y.						
Oneida (Rte. 49 & 12C)	FARC 57-48	Mohawk River Road–Marcy, S.H. 296 Whitesboro–Carey Corners, S.H. 5547–5547C.A. Whitesboro–Trenton, S.H. 5325 Proj. U-518(4)	1.33 0.97 (Acc.)	9" Cem. Conc. Pavt. 2@ 24' Var. Wide=1.70 Mi. Asph. Conc., Opt.=0.48 Mi. Misc. Work=0.12 Mi. 1 Hy.Sep.Comp.I-Beam 189.2' 1 Br. Cantilever Truss 316'	$79,000 Plans $25	1,431,000
Madison & Oneida	C.R. 57-1	City of Oneida North-South Arterial Connection, FASH 56-2, Oneida–Southbay, Pt. 1, S.H. 1110	....	Removal & Reinterment of Human Remains	$125 Plans $10	2,200
DISTRICT No. 4, B. F. PERRY, District Engineer, Barge Canal Terminal, Rochester, N. Y.						
Livingston (Rte. 15)	FARC 57-52	Conesus-Wayland, S.H. 1321 Proj. F-599(4)	4.21	Asph. Conc.=4.09 Mi. Misc. Work=0.12 Mi.	$30,000 Plans $25	545,000
DISTRICT No. 5, E. G. H. YOUNGMANN, District Engineer, 65 Court St., Buffalo, N. Y.						
Erie (Rte. 20A)	FARC 57-54	Orchard Park–East Aurora, S.H. 1066 Proj. F-1054(3)	1.09	Asph. Conc., Opt.=1.07 Mi. Misc. Work=0.02 Mi.	$12,000 Plans $10	224,000
Erie (Rte. 5)	FARC 57-55	Evans Center–Farnham, S.H. 5634 Farnham–Irving, S.H. 5600 Proj. F-736(6)	6.61	Asph. Concrete	$45,000 Plans $10	795,000
DISTRICT No. 6, J. H. THOMAS, District Engineer, 30 W. Main St., Hornell, N. Y.						
Schuyler (Rte. 224 & 13)	FARC 57-58	Montour Falls–Alpine, Pt. 2, S.H. 999 Alpine–Cayuta, Pt. 1, S.H. 1233 P.S.C. 5349 & Cayuta–Newfield, S.H. 5474A-P.S.C. 5350 Proj. F-400(5), F-560(5)	4.67	Asph. Conc., Opt.	$20,000 Plans $10	381,000
Schuyler (Rte. 14)	FARC 57-59	Watkins Village:Franklin St., S.H. 5335, Watkins–Yates County Line, S.H. 5334, Gabriels Corners-Starkey, Pt. 1, S.H. 1918 & Gabriels Corners–Starkey, Pts. 1&2, Starkey–Dresden, Pt. 1, S.H. 8399 Project F-505(6)	3.56	Asph. Conc., Opt.	$110,000 Plans $25	1,987,000
Steuben (Rte. 36)	FARC 57-60	Arkport–Dansville, S.H. 5352–5352A Project F-579(5)	5.11	Asph. Conc. Opt.=5.05 Mi. Misc. Work=0.06 Mi.	$52,000 Plans $15	955,000
Steuben (Rte. 36)	FARC 57-61	Hornell-Arkport, S.H. 5254 Project F-619(4)	2.71	Asph. Conc.	$11,000 Plans $10	196,000
Steuben (Rte. 15)	FARC 57-63	Erwin–Lawrenceville, Pt. 1, S.H. 1593 Project F-503(9)	3.81	Asph. Conc.	$18,000 Plans $10	319,000
DISTRICT No. 7, R. W. SWEET, District Engineer, 444 Van Duzee St., Watertown N. Y.						
St. Lawrence (Rte. 37)	FARC 57-47	Morristown–Hammond Pt. 2 S.H. 970–970A Project F-650(5)	4.55	Asph. Conc. Opt.	$32,000 Plans $25	577,000
DISTRICT No. 8, K. G. RAUER, District Engineer, Pleasant Valley Road, Poughkeepsie, N. Y.						
Columbia	TSP 57-1P	Taconic State Parkway, Sect. 9B, Part 2 (West Taghkanic–Martindale)	8.02	Asph. Conc. Opt.=7.93 Mi. 8" Unreinf. Cem. Conc. Var. Wide=0.09 Mi.	$130,000 Plans $50	2,482,000
Columbia	FASH 57-10 FARC 57-49	Rhinebeck–Hudson, Pt. 5, SH 8341 Livingston–Hudson, Pt. 2, S.H. 5073 Rip Van Winkle Bridge–Buckley Corners–Claverack, Pt. 1 and East Approach Rip Van Winkle Bridge Intersect. Project F-492(6); F-863(1)	3.31 (1.35) (Acc.)	9" Cem. Conc. Pavt. 2 at 24' Var. Wide=4.11 Mi. Asph. Conc.=0.47 Mi. Misc. Work=0.08 Mi.	$95,000 Plans $25	1,726,000
Ulster (Rte. 213)	FARC 57-64	Kingston–High Falls, S.H. 229 High Falls–Stone Ridge, S.H. 1464 Project S-461(1)	1.96	Asph. Conc. Opt.	$25,000 Plans $10	440,000
Ulster (Rte. 32)	FARC. 57-72 B.A. 57-1	West Approach to Kingston–Rhinecliff Bridge (Rte. 9W to Rte. 32): Kingston–Ulster Landing, S. H. 306 Project S-479(1)	1.90 (0.76) (Acc.)	9" Cem. Conc. Pavt. 48' Var. Wide=1.72 Mi. Asph. Conc., Opt.=0.94 Mi. Hy. Sep. Prestress, Conc. Beam 155.9'	$72,000 Plans $15	1,316,000
Westchester	FINETC 57-3	New York State Thruway–New England Section–Sub. NE-5 (Rye Interchange Area, East of Boston Post Road) Project I-IN-1068(13)	0.46	Modification to Railroad Facilities and Re-Routing of Communication Lines	$18,000 Plans $25	336,000
DISTRICT No. 9, J. C. FREDRICK, District Engineer, 71 Frederick St., Binghamton, N. Y.						
Chenango (Rte. 41)	FARC 57-27	Afton–Coventry, S.H. 5698 Project S-668(3)	3.55	Asph. Conc., Opt. Widening Two Exist. Bridges	$20,000 Plans $10	364,000
Sullivan	FESS 57-6	Barryville-Yulan, C.R.21 Project ER-26(2)	1.86	Asph. Conc., Opt.	$13,000 Plans $15	238,000

Any projects in this letting that are on the Federal Aid highway systems are subject to the provisions of the "Federal-Aid Highway Act of 1956", being Public Law 627, 84th Congress, approved June 29, 1956, and are also subject to the applicable New York State statutes.

In compliance with the provisions of Section 115 (Prevailing Rate of Wage) Public Law 627, the minimum wages to be paid laborers and mechanics are included in wage schedules that are set out in the bid proposal.

Maps, plans, specifications and proposal forms may be seen and obtained at the office of the State Department of Public Works, Bureau of Contracts, Albany, N. Y., and at the office of the District Engineers noted above, and may also be seen at the office of the State Department of Public Works, 270 Broadway, New York City.

The deposit for Plans and Proposal Forms for each contract is indicated above. A refund will be made in full to bidders for return of one set, in good condition, within 30 days of award, or rejection of bids; refund for all other sets in good condition, similar period, will be 50% of deposit.

Special attention of bidders is called to "General Information for Bidders" in the proposal, specification, and contract agreement, and to the special provisions applying to projects financed with federal funds. Award of a contract is subject to priorities and allocations under the Defense Production Act of 1950, as amended, and all regulations issued thereunder.

Proposal for each contract must be submitted in a separate sealed envelope with the name and number of the contract plainly endorsed on the outside of the envelope. Each proposal must be accompanied by draft or certified check payable to the order of the "State of New York, Commissioner of Taxation and Finance" for the sum as specified in the advertisement and the proposal. The retention and disposal of the bidding check, the execution of the contract and bonds shall conform to the provisions of the Highway Laws, as set forth in "Instructions to Bidders".

The right is reserved to reject any or all bids.

JOHN W. JOHNSON
SUPT OF PUBLIC WORKS

Bids: May 27, 1957.

Construction of a Sewer System Hellertown Borough Authority

Sealed proposals will be received by the undersigned at BOROUGH COUNCIL CHAMBERS, BOROUGH HALL, 685 MAIN STREET, HELLERTOWN, NORTHAMPTON COUNTY, PENNSYLVANIA until 7:30 P. M. Eastern Standard Time, Monday, May 27, 1957, at which place and time or shortly thereafter they will be publicly opened and read, and shall cover furnishing all necessary labor, materials and equipment, and performing all work for the "Construction of a Sewerage System" for the Hellertown Borough Authority. Each proposal shall be accompanied by a certified check or bid bond in an amount not less than ten percent of the bid total, all in accordance with the provisions contained in the Contract Documents.

Copies of the Contract Documents, including Drawings and Specifications, may be obtained only from the office of LEONARD M. FRAIVILLIG COMPANY, ENGINEERS, 633 MAIN STREET, BETHLEHEM, PENNSYLVANIA, at which place copies will also be on hand for inspection by prospective bidders, and material and equipment supplies. Not more than two (2) sets of a particular Contract will be allowed to any prospective bidder.

Checks for all deposits shall be drawn payable to LEONARD M. FRAIVILLIG COMPANY and sent to their address as indicated above. Deposit for each set requested shall be as follows:

CONSTRUCTION OF A SEWERAGE SYSTEM $90.00

Full refund will be made only to actual bidders on the above noted Contract, for return of one (1) set not more, of the Contract Documents in good condition within fifteen (15) calendar days after closing date for receipt of bids; refund for return of all other sets in good condition within the same period, will be fifty (50) percent of deposit. No refund of deposit will be made for Contract Documents returned later than fifteen (15) calendar days after date of receipt of bids.

Copies of the Contract Documents, including Drawings and Specifications will be on file, for inspection purposes only, at Borough Hall, 685 Main Street, Hellertown, Pennsylvania, but none can be obtained from the above mentioned place.

Leonard M. Fraivillig Company
Engineers
Bethlehem, Pennsylvania
Hellertown Borough Authority
Hellertown
Northampton County
Pennsylvania

OFFICIAL PROPOSALS

Bids: May 9, 1957

New York State Road Work

NOTICE TO CONTRACTORS: STATE DEPARTMENT OF PUBLIC WORKS, ALBANY, N. Y.,—Pursuant to the provisions of the Highway Law, sealed proposals will be received until ten-thirty o'clock A.M., advanced standard time, which is nine-thirty o'clock A.M., eastern standard time, on the 9th day of May 1957, by Henry A. Cohen, Director, Bureau of Contracts, 14th Floor, Building, Albany, N. Y., for the following projects:

DIST. NO. 8, K. G. Rauer, District Engineer, Pleasant Valley Road, Poughkeepsie, N. Y.

DISTRICT No. 8, K. G. Rauer, District Engineer, Pleasant Valley Road, Poughkeepsie, N. Y.

County	Contract No.	Name	Miles	Type	Deposit	Estimated Cost of Work
Dutchess and Ulster	M.H.B. 57-1	Mid-Hudson Bridge	....	Cleaning & Painting Existing Bridge	$7,000 Proposal $5	$125,00

Any projects in this letting that are on the Federal Aid highway systems are subject to the provisions of the "Federal-Aid Highway Act of 1956", being Public Law 627, 84th Congress, approved June 29, 1956, and are also subject to the applicable New York State statutes.

In compliance with the provisions of Section 115 (Prevailing Rate of Wage) Public Law 627, the minimum wages to be paid laborers and mechanics are included in wage schedules that are set out in the bid proposal.

Maps, plans, specifications and proposal forms may be seen and obtained at the office of the State Department of Public Works, Bureau of Contracts, Albany, N. Y. and at the office of the District Engineers noted above, and may also be seen at the office of the State Department of Public Works, 270 Broadway, New York City.

The deposit for Plans and Proposal Forms for each contract is indicated above. A refund will be made in full to bidders for return of one set, in good condition, within 30 days of award, or rejection of bids; refund for all other sets in good condition, similar period, will be 50% of deposit.

Special attention of bidders is called to "General Information for Bidders" in the proposal, specification, and contract agreement. Award of a contract is subject to priorities and allocations under the Defense Production Act of 1950, as amended, and all regulations issued thereunder.

Proposal for each contract must be submitted in a separate sealed envelope with the name and number of the contract plainly endorsed on the outside of the envelope. Each proposal must be accompanied by draft or certified check payable to the order of the "State of New York, Commissioner of Taxation and Finance" for the sum as specified in the advertisement and the proposal. The retention and disposal of the bidding check, the execution of the contract and bonds shall conform to the provisions of the Highway Laws, as set forth in "Instructions to Bidders".

The right is reserved to reject any or all bids.

JOHN W. JOHNSON

SUPT. OF PUBLIC WORKS

U. S. Government

ADVERTISEMENT

Sealed bids will be received in the office of the Engineering and Construction Director, Panama Canal Company, Balboa Heights, Canal Zone until 10:00 A.M., E.S.T., June 28, 1957 and at that time publicly opened, for the following: Furnishing all plant, labor, materials, equipment and services and performing all work to convert all domestic, commercial, and industrial equipment on the Pacific side of the Panama Canal Zone from 25 to 60 cycle operation. The work, in general, consists of conversion or replacement of all frequency sensitive appliances, machines and equipment as well as modifications to electrical equipment and facilities in the Pacific Terminal Area of the Canal Zone. Bid data, specifications, and drawings will be available for examination by prospective bidders or other interested parties in the New York office, Panama Canal Company, Procurement Division, 21 West Street, New York 6, N. Y. Data may be obtained upon payment of a deposit of $50.00 for each set, which will be refunded if data is returned within 40 calendar days after the opening of bids. For further information call Bowling Green 9-5380, extension 56.

DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids (Specifications No. DC-4898) will be received at the Post Office Building, Grand Junction, Colorado, until June 6, 1957, for furnishing labor and materials for Vega Dam and Relocation of County Road, Collbran Project, Colorado. Location near Collbran, Colorado. Principal items are 1,175,000 cu. yds. of excavation; 800,000 cu. yds. earthfill in dam embankment; 61,000 cu. yds. riprap; 3,840 cu. yds. concrete; 56,000 lbs. installing high pressure gates and appurtenant equipment; furnishing and installing approximately 370 lin. ft. of 51-inch diameter steel outlet pipe; and other work. Completion time 900 days. For particulars, address Bureau of Reclamation, P. O. Box 780, Grand Junction, Colorado; or Building 53, Denver Federal Center, Denver 2, Colorado. W. A. Dexheimer, Commissioner.

Many contractors depend entirely upon the

OFFICIAL PROPOSAL COLUMNS of Engineering News-Record

for Opportunities to bid. They might not see your announcements if printed elsewhere

●

You undoubtedly want their bids on your contracts. Make sure of them on your next contract.

●

The cost is only $2.10 a line per issue.

EMPLOYMENT OPPORTUNITIES

REPLIES (Box No.): Address to office nearest you
c/o This publication Classified Adv. Div.
NEW YORK: P. O. Box 12 (36)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)

POSITIONS VACANT

Position open for Junior College instructor in Drafting and Engineering Drawing. Apply, Director, Coalinga College, California.

Chief of Party—Must be capable of handling survey parties and have thorough understanding of survey work pertaining to rights of way, curb and street lines, sanitary and storm sewer surveys, and general survey work. Apply by appointment—Office of Howard Madison, Township Engineer, 1 Main Street, Woodbridge, N. J., between 9 A.M. and 5 P.M.

Designer—draftsmen with several years experience in the design of sewage treatment plants, pumping stations and related structures. Excellent opportunity with growing firm in City in Upstate New York. Salary commensurate with ability. Paid vacations, holidays, hospitalization. Our employees know of this ad. P-4729, Engineering News-Record.

Transit Man—For inside and outside work. Must have thorough knowledge of engineering, drafting and calculating, and be thoroughly familiar with deed and conveyance, and tax map work. Apply by appointment—Office of Howard Madison, Township Engineer, 1 Main Street, Woodbridge, N. J., between 9 A.M. and 5 P.M.

Associate Professors, Assistant Professors, or Instructors, (rank and salary determined by training and experience) to teach in the Department of Engineering Drawing, which administers courses in Graphics, Engineering Mechanics, and Engineering Orientation. Year round opportunities for participation on research which replaces part of teaching load during the academic year. Apply to Professor Carson P. Buck, Chairman, Department of Engineering Drawing, Syracuse University, Syracuse 10, N. Y.

Structural engineer for building design. Ketchum and Konkel, Consulting Engineers, 1090 Fox Street, Denver 4, Colorado.

Associate professor for transportation and soils engineering in C.E. Dept. of large eastern metropolitan university. Probable starting salary in neighborhood of $7,500 for nine months depending upon qualifications. P-4805, Engineering News-Record.

POSITIONS VACANT

Teaching position in civil engineering and/or mechanics starting next September. Salary and academic rank dependent on qualifications. Salary up to $7,500.00. Location New York State. P-4840, Engineering News-Record.

Assistant Professor to teach mechanics and/or civil engineering starting next September. Salary $6,500.00 Ph.D. desirable. Location New York State. P-4839, Engineering News-Record.

Designers - Electrical - Piping - Struct. Power Plants and Industrial Buildings. Marbarry Corp. 120 Greenwich St., New York City 6, N. Y. REctor 2-3749.

Engineer — Superintendent — Interceptor Sewer Project in Pittsburgh area. Good arrangement for right man. Must be experienced. Send qualifications and references in first letter. P-4859, Engineering News-Record.

Mechanical or Civil Engineer position available recent graduate who prefers the diversified responsibilities of staff position with a well established growing business. Write P-4857, Engineering News-Record.

Superintendent Wanted: Man experienced in construction of High Class Monumental Buildings. Only man with great depth of actual experience in this class of work should apply. P-4570, Engineering News-Record.

Structural Steel Detailers, Checkers and Sales Engineer Position. Open. Location center of Eastern Oklahoma resorts area. P-4892, Engineering News-Record.

Senior Cost Engineer familiar with the Uniform System of Accounts for electric utilities. Duties will consist of analyzing completed major construction projects for an Electric Utility. Experience with the Federal Power Commission or a State Public Service Commission would be desirable. Some experience with the Property Record Department of any Electric Utility would also be an asset. Indianapolis Power and Light Company, Employment Department, 1220 West Morris St., Indianapolis, Indiana.

Wanted Experienced Chief Of Party, Civil Engineer and/or Surveyor. Permanent position in Michigan. Submit resume first letter. Salary open. P-4911, Engineering News-Record.

(Continued on opposite page)

EMPLOYMENT OPPORTUNITIES

DISPLAYED

The advertising rate is $31.80 per inch for all advertising appearing on other than a contract basis. Frequency rates quoted on request.

An advertising inch is measured 7/8" vertically on a column—3 columns—30 inches to a page.

Subject to Agency Commission.

—RATES—

UNDISPLAYED

$2.10 per line, minimum 3 lines. To figure advance payment count 5 average words as a line.

Position Wanted ads take ½ of above rate.

Box Numbers—count as 1 line.

Discount of 10% if full payment is made in advance for 4 consecutive insertions.

Not subject to Agency Commission.

Send NEW ADS and Inquiries to Classified Advertising Division of ENGINEERING NEWS-RECORD
P. O. Box 12, N. Y. 36. May 9th issue closes April 29th

POSITIONS VACANT

Continued from opposite page

Wanted Experienced Structural Draftsman and Detailer. Bridge experience preferred but not essential. Locate in Michigan. Submit resume first letter. P-4912, Engineering News-Record.

Civil Engineer II: Salary range $5,720-$6,864 annually. Age: 25-55. Qualifications: B.S. degree in civil engineering plus two years' experience. Driver's permit. P-4470, Engineering News-Record.

Mechanical Engineer, 25-40, graduate—to develop and manage mechanical engineering department of firm of Consulting Engineers & Architects (offices in the Upper Midwest and Southwest). Experience in heating, piping and air conditioning desirable. Paid vacations, holidays and sick leave. Group health and hospitalization insurance. Excellent opportunity to grow with the company. Salary open. Mail qualifications to Scott Engineering Company, P.O. Box 863, Watertown, South Dakota. Interviews will be arranged.

Reinforcing Steel Detailer wanted by Bar Fabricator. Excellent salary and good chance for advancement. Two to three years experience preferred. Send resume or phone York, Pa. 7741, Brocker Mfg. Supply Co.

Excellent opportunities for an active salesman and also a semi-retired man, both with good contacts with engineers in the heavy chemical and paper pulp mill fields, to represent firm of contracting engineers specializing in corrosion control protective coatings (not paint). Drawing account and expenses against commission. Please state age, experience and full particulars. P-4942, Engineering News-Record.

Map draftsman for surveyors office located in Chicago, Ill. State qualifications in 1st reply and sample of lettering. P-4692, Engineering News-Record.

Checkers: Heavy pressure vessel shop needs experienced old timers. Top wages and overtime. Many fringe benefits. Florida type climate and country's finest hunting and fishing. Some detailers also needed. Permanent and expanding work load. Apply with full particulars and photo to Emile Lusted, Chief Engineer, Delta Tank Manufacturing Co., Baton Rouge, Louisiana.

Structural Engineer for permanent position with established consulting engineering firm in South Florida. Experience in multi-story design, reinforced concrete and structural steel desirable. Salary open. P-4958, Engineering News-Record.

Wanted-Assistant City Engineer, City of Easton, Pennsylvania, for general city engineering work. Reply stating age, education, experienced and background and salary expected should be addressed to the City Clerk, City Hall, Easton, Pa.

A new expanding construction materials laboratory in the Southwest needs a manager experienced in materials and soils. Graduate engineer desirable but not essential. Dynamic, aggressive, administrator is essential. Income $4800 plus percentage of profit. Please send brief resume of experience, references, etc. P-4949, Engineering News-Record.

City Engineer: Graduate Civil Engineer with municipal experience in street improvements by the direct assessment district method. Starting salary, $7,000. Applicants should apply to Personnel Officer, City of Boulder, Colorado.

Estimator, tops only, career minded to train as Asst. Exec. for Bergen Co. Indus. Bldr., Write following, salary, non-business interests, full details. P-4956, Engineering News-Record.

Two teaching appointmens in C.E. Department, work to begin Sept 1, 1957. Salary and rank depend upon qualifications. M.S. degree not required, may be obtained while teaching. Dept. of Civil Engineering, Univ. of Nebr., Lincoln, Nebr.

POSITIONS VACANT

Gunite Superintendent—Wanted Immediately. Middle Atlantic States. State age, experience, availability, salary desired. P-4640, Engineering News-Record.

EMPLOYMENT AGENCY

Wanted Engineers, Designers, Draftsmen All lines. Chemists, teachers and industrial engineers. Recent grads. Cleveland Engineering Agency 2132 E. 9, Cleveland 15, O.

POSITIONS WANTED

Mechanical Engineer — Age 31 — contracts manager, project engineer—supervisor machinery and mechanical equipment installation. 8 years experience heavy construction foreign and domestic, field and office. Excellent references. Seeking opportunity N.Y.C. or vicinity metropolitan area. PW-4764, Engineering News-Record.

Superintendent Construction over 20 yrs. experience, varied projects, industrial to high class finish. Engineer. Anywhere. PW-4742, Engineering News-Record.

Project Mgr. — Superintendent, heavy & bridge construction, fully qualified in all phases, 20 years exp. $200. PW-4810, Engineering News-Record.

Construction Supt., ready for next step up. 12 yrs. exp., specializing in concrete, comm. and ind. const. Eng. background, B.A. deg. Will relocate anywhere. Excellent ref. PW-4785, Engineering News-Record.

Chief Estimator—Age 31—B.S.C.E. Capable of handling job from bid to completion. Experienced industrial, commercial and institutional. Excellent record. PW-4789, Engineering News-Record.

Contractors Engineer, P.E., 33, experienced in broad phases of building construction desires affiliation with foresighted building and/or heavy construction contractor where he might use his ability and ambition to their mutual advantage. PW-4781, Engineering News-Record.

Graduate civil engineer, eight years experience as a construction engineer with a midwestern state highway department. Desire responsible position with firm contracting highway construction. PW-4885, Engineering News-Record.

Personnel Assistant 28, married. Four years experience in interviewing, screening, and recruiting professional and technical help. Industrial, courteous, and personable. Previous experience in timekeeping, budget control, and sales. Will relocate. PW-4882, Engineering News-Record.

Engineer-Estimator, 30, BSCE. Desires responsible position with general contractor. 4 years estimating and administrative experience in municipal, commercial and industrial buildings. 3 years diversified field experience. PW-4870, Engineering News-Record.

Construction manager-engineer, 30. Degree in architecture. Solid experience in design, estimating, project management, both field and office. Desires permanent position West or Southwest. PW-4872, Engineering News-Record.

Estimator-Project Manager. Lic. Engr. young, able, progressive, experienced in all phases of construction: estimating, project management, purchasing, subcontract control. Desires connection with genl. contractor in the Southwest. PW-4898, Engineering News-Record.

POSITIONS WANTED

Construction Executive available—16 years experience with general contractor. Excellent profit making background. Desires to relocate South-West or Far West. Can handle project from bid to completion. Available June 1st. PW-4897, Engineering News-Record.

Building Const. Field Supt: Industrial, commercial, institutional, churches, etc. Similar position in field desired, 25 years exp. can travel. Age 55. PW-4645, Engineering News-Record.

Structural Engineer, 27, BS desires European job. Immediate or future assignment. 5 years design and field experience. PW-4880, Engineering News-Record.

Concrete and Materials Engineer, registered P.E., 25 years experience in all phases of Concrete and Concreting materials, including being in charge of laboratory testing and field inspection forces. PW-4881, Engineering News-Record.

Construction Executive sound experience all phases, bid to completion, buildings and heavy construction, available as project manager, chief estimator or similar position where scope and volume require top man. Now employed. Minimum $15,000. PW-4709, Engineering News-Record.

Architects' Superintendent—ten years experience—desires work in middle Atlantic States. PW-4962, Engineering News-Record.

Civil Engineer, 26, very good background perfect knowledge of Spanish Engineering experience in Argentina and USA interested field work in South America. PW-4950, Engineering News-Record.

Construction Manager-Office & Field Engr., Grad. C.E. 15 years. responsible genl. contracting & consultg. engr'g. experience in bldg. constr. incl. estimating, contract negot'n., field supervision, new business, archt.-owner relations. Available now for domestic or foreign assignm't. PW-4947, Engineering News-Record.

Estimator, Project Manager, Purchasing, Highway Construction. 40 years experience, 60 years of age, good health, Long Island preferred. PW-4913, Engineering News-Record.

Technical engineer, 30, single, free to travel anywhere. Interested in overseas work. 8 years experience construction field. PW-4906, Engineering News-Record.

Liaison and Sales Engineer selling design service, also project engineer, twenty years structural and mechanical background, seeks new connection. PW-4907, Engineering News-Record.

Const. Supt.—35 bridges, highways, marine, tunnel PE—N.Y.C. & Vic. PW-4905, Engineering News-Record.

General Construction. Manager or Superintendent. Experience in hospital, schools, monumental, industrial buildings, canals. 34 years experience. Speak English, French, Spanish. Best references. Would like to work South America, Spain or South U.S.A. Available after 2 weeks. PW-4904, Engineering News-Record.

ATTENTION CONTRACTORS
Bid any and all types of jobs.
We supply Construction Superintendent, Job Engineer, Building Engineer and Materials Engineer.
PW-4919, Engineering News-Record, 520 N. Michigan Ave., Chicago 11, Ill.

HIGHWAY ENGINEERS

SURVEY – DESIGN – STRUCTURAL

Offices

South Bend, Ind. East Lansing, Mich. Wheeling, Ill.

Benefits

Company pays Hospital Insurance, including dependents, vacations, Profit-Sharing-Retirement Plan. Low Personnel turnover. Salary advancement periodically with your advancement in ability.

CHAS. W. COLE & SON

220 W. LaSalle Ave. South Bend, Ind.

Mechanical ENGINEER

EXPERIENCED PIPING
Tanker Oil Bulk Terminals
Steam & Condensate Piping
Small Boiler Plants,
and Instrumentation

PERMANENT OPPORTUNITY

For Older Man with rapidly expanding firm, which needs a clear thinker.

Send Resume

P-4828, Engineering News-Record
Class. Adv. Div., P.O. Box 12, N.Y. 36, N.Y.

McKEE NEEDS

- Structural
- Concrete
- Piping
- Mechanical

ENGINEERS

Our Metals, Refinery and Industrial Divisions offer you wide choice of opportunity to make full use of your talents, with excellent prospects for promotion to supervisory, staff and executive posts.

Broad diversification of work in our three engineering divisions assures you *permanent* security of employment.

You can build a strong foundation for your future with McKee. For complete information on the McKee organization and the extra benefits this company offers you write for our folder "The Key to Your Future" or contact us by telephone.

Telephone TOwer 1-2300, Cleveland, Ohio or write to Edward A. Kolner Arthur G. McKee & Company 2300 Chester Ave., Cleveland 1, Ohio

Arthur G. McKee & Company

Engineering offices in
CLEVELAND, OHIO • UNION, N.J. • TORONTO, ONT.

SOUTH DAKOTA DEPARTMENT of HIGHWAYS

Engineering Opportunities

Professional openings on the South Dakota Department of Highways staff present permanent opportunities for Civil Engineering graduates in the following classifications and salary brackets:

Structural Designer $5940-7020

Structural Draftsman . . . $5220-6240

Civil Engineers (Highway — Survey — Design — Construction—Drafting) . . . $4980-7020

Benefits include salary schedule, sick leave with pay, paid vacations, military leave with pay, available hospitalization plan.

For application forms, contact:

C. V. DOODY, Personnel Director
Department of Highways
Pierre, South Dakota

CONCRETE CONSTRUCTION ENGINEER WANTED IN SOUTH AMERICA

Opportunity for experienced Concrete Construction Engineer to supervise construction job in Colombia, South America, for one year. Adequate salary will be arranged depending upon man's ability. Must be available in Chicago for interview the end of April. Write experience and salary expected immediately to

ENGINEERING EQUIPMENT COMPANY
205 West Wacker Drive Chicago 6, Ill.

ELECTRICAL

DESIGNER – DETAILER

Age 40 upward; mature in years, experience and judgment.

Outstanding opportunity offered by expanding Fuel Oil DISTRIBUTOR, N Y C area.

Major Experience—CONSTRUCTION with special reference to:—

- **. . . Full remote controls**
- **. . . Power & Metering**
- **. . . Plant Inter-Comm.**
- **. . . Yard & Flood Lighting**
- **. . . Wiring from Mechanical Instrumentation**
- **. . . Boilerhouse, etc.**

Please send full details.

P-4832, Engineering News-Record,
Class. Adv. Div., P.O. Box 12, N.Y. 36, N.Y.

Highway & Bridge Engineers Designers & Draftsmen

Career opportunities for men interested in professional recognition.
Excellent working conditions and employee benefits including liberal retirement program.
Openings in Pennsylvania, Maryland, Florida, West Virginia, Mississippi and overseas.

Air Mail Resume TO R. L. SHAW, *Personnel Director*

MICHAEL BAKER, Jr., INC.

BAKER BLDG. *Consulting Engineers* ROCHESTER, PA.

3 SOIL AND FOUNDATION ENGINEERS

Engineers with advanced degree required. Prefer men with considerable practical experience in highway soils and foundation practices. Would also be interested in person for summer work now teaching these subjects at graduate level. Positions are top-level professional opportunities with appropriate earnings. Location midwest. Send resume to:

TESTING SERVICE CORP.
Box 284 Villa Park, Illinois

ENGINEERS

Positions open for experienced Engineers with excellent opportunities for advancement:

CIVIL OR SANITARY ENGINEERS to design Sewage Treatment Plants and Sewage Works or to take charge of individual project.

STRUCTURAL DESIGNERS experienced in Concrete and Steel design of Sewage Treatment Plants, Water Treatment Plants, or Hydraulic Structures in connection with Dams.

SOILS ENGINEERS experienced in Slip Circle Analysis Method for design of Earth Dams or experienced in Highway Construction.

HYDRAULIC ENGINEERS experienced in design of Earth and Concrete Dams or Water Treatment Plants.

CIVIL OR SANITARY ENGINEERS as Principal Assistant in Design.

DRAFTSMEN experienced in Turnpikes, Bridges, Dams, Water Treatment and Sewage Treatment Plants.

SPECIFICATION WRITER experienced in Sewage Plant Specifications.

Ideal living conditions, vacations and sick leave, bonus, insurance and retirement benefits.

Send complete resume to —

GANNETT FLEMING CORDDRY & CARPENTER, INC.

P. O. Box 366 Harrisburg, Penna.

POSITIONS AVAILABLE

FOR

ENGINEERS DESIGNERS DETAILERS

ON HIGHWAY, EXPRESSWAY AND DRAINAGE ENGINEERING DESIGN IN OUR ST. LOUIS OFFICE

YOU WILL WORK WITH HIGHLY SKILLED ENGINEERS IN A PLEASANT ENVIRONMENT

Overseas Openings Available For Engineers 30 to 45 With Extensive Experience in Highway Engineering

Write Fully To

SVERDRUP & PARCEL ENGINEERING CO.

1134 LOCUST ST., ST. LOUIS 1, MO.

ENGINEERS

Long established firm of consulting engineers with world-wide practice needs both beginners and experienced civil, electrical, mechanical, and foundation engineers for interesting work on large dams, powerplants, and river control works. Permanent positions. Liberal employee benefits. Starting salaries dependent on qualifications. Please send complete resume to Hugo Niemi, Personnel Manager.

HARZA ENGINEERING CO.

400 W. Madison St. Chicago 6, Ill.

GRADUATE CIVIL ENGINEERS or ARCHITECTURAL ENGINEERS

Major Southwestern general contractor needs engineers for work in estimating dept. Job requires investigation and take off and can also lead to field work depending on interest of employee. Excellent opportunity for young men to obtain desirable position with reliable firm doing all types of construction work. Have openings in El Paso, Dallas, and Los Angeles offices.

ROBERT E. McKEE

GENERAL CONTRACTOR, INC.

PO BOX 562 EL PASO, TEXAS

STRUCTURAL and MECHANICAL DESIGNERS

Having experience with heavy material handling equipment

Permanent Position For Qualified Men

HOSPITALIZATION INSURANCE VACATION

Phone or Write Chief Engineer for interview

THE WELLMAN ENGINEERING CO.

7000 CENTRAL AVE. Cleveland 4, Ohio Telephone EN 1-0842

BRIDGE & HIGHWAY ENGINEERS DRAFTSMEN

BROOKHART & TYO

Consulting Engineers

3501 N. Front St. Harrisburg, Pa.

ENGINEERS

Maintenance, Scheduling & Programming

Several graduate engineers with minimum 5 years' experience supervising maintenance engineering functions in oil refining or producing facilities, power plants, heavy industrial installations and supporting facilities. For work in Saudi Arabia as Staff Engineers.

High salary commensurate with background and experience; living allowance and all-inclusive benefits.

Submit resume including your telephone number to:

Recruiting Supervisor, Box 203

ARABIAN AMERICAN OIL COMPANY

505 PARK AVENUE

NEW YORK 22, NEW YORK

HIGHWAY ENGINEER

Highway Engineer with 8 to 12 years experience in design and administration. Must be able to assume heavy responsibility. Excellent opportunity with established consulting engineering firm in Middle West. Must be registered.

P-4635, Engineering News-Record, 520 N. Michigan Ave., Chicago 11, Ill.

ARCHITECTURAL ENGINEER

Architectural Engineer between ages of 25 and 35 with interest in design of industrial buildings and structures.

Excellent opportunity with consulting engineering firm in Middle West. Liberal benefit plans and good working conditions.

Send resume of education and experience with statement of salary requirements to:

P-3222, Engineering News-Record 520 No. Michigan Ave., Chicago 11, Ill.

HIGHWAY ENGINEERS

DESIGNERS DETAILERS

FOR OFFICE WORK IN ST. LOUIS ON HIGHWAYS, EXPRESSWAYS AND ASSOCIATED CIVIL WORKS

- Permanent employment for qualified men
- Ample opportunity for advancement based on merit
- Generous transportation & moving allowances
- Inquiry as to overseas field and office openings

Plus: Employee Benefit and Retirement Plan, Paid Vacations, Holidays, Sick Leave. Blue Cross available.

PLEASE WRITE FULLY TO OR INQUIRE AT

SVERDRUP & PARCEL ENGINEERING CO.

1134 LOCUST ST.

ST. LOUIS 1, MO.

ENGINEERS

Designers Detailers Draftsmen for work on

Bridges, Expressways, Turnpikes

PERMANENT POSITIONS DEPENDING ON EXPERIENCE AND ABILITY
PAID VACATION, SICK LEAVE HOSPITALIZATION, LIFE INSURANCE
INCLUDE EDUCATION, EXPERIENCE, REFERENCES AND SALARY EXPECTED IN APPLICATION LETTER

Howard, Needles, Tammen & Bergendoff
1805 GRAND AVE. KANSAS CITY 8, MO.

ENGINEER

FIELD Supervisor

Supervise Installation by Contractors/Sub-Contractors for Major Fuel Oil Distributor located N Y C area.

Experienced Industrial Building, BULK OIL TERMINALS.

Capable supervising work specified by Mechanical, Civil and Electrical Engineers

Permanent Opportunity for an Experienced Older Man, Age 40 upward

Write full details in confidence.

P-4917, Engineering News-Record, Class. Adv. Div., P.O. Box 12, N.Y. 36, N.Y.

ENGINEERS

Civil Engineers with or without experience in hydraulics, soils, concrete design, contracts estimating, dams or construction for work on flood control projects in Pennsylvania. Salary to $9000. State experience, salary requirements and references.

P-4228—Engineering News-Record
Class. Adv. Div., P. O. Box 12, N. Y. 36, N. Y.

DRAFTSMEN

This Might Well Be The Opportunity You Are Looking For

- **LAYOUT DRAFTSMAN**
  Architectural background helpful
- **FIXTURE DRAFTSMAN**
  Shelving, counters, sinks, etc.

Stop by and see us Monday, Tuesday or Wednesday from 9 to 12 or telephone ORchard 3-3500 for an appointment.

PENN FRUIT CO.
Grant Ave. & Roosevelt Blvd.
Philadelphia, Pa.

DIRECTOR OF PUBLIC WORKS

Engineering degree and license and five years' public works experience required. Annual salary $9746. starting.

Apply Town Manager, West Hartford, Connecticut

WANTED

WATER DIVISION MANAGER

Government of Guam, Marianas Islands, 6,000 meter system. Manager does planning, engineering and operation. Supervises construction, maintenance and office. Two year contract, renewable. Reasonable rent and living costs. Transportation to and from Guam. *Write*

PUBLIC UTILITY AGENCY
Box 719, Agana, Guam

CIVIL ENGINEER

Young civil engineer interested in broad application of civil engineering.

Excellent opportunity with consulting firm. Liberal benefit plans and good working conditions. Location Middle West.

Send resume of education and experience with salary requirements to:

P-3223, Engineering News-Record
520 No. Michigan Ave., Chicago 11, Ill.

Field Engineer

Building Construction firm in Northern New York desires Civil Engineers 20 to 40 years of age for immediate employment, permanent positions. Vacations, Life and Medical Insurance afforded. Opportunity for advancement.

Call JOSEPH TOKOS
JOHN W. ROUSE CONSTRUCTION CORP.
8 Church St. Gouverneur, New York
Telephone 860

EXPERIENCED ESTIMATORS

on Petroleum and Chemical Plants at our Cambridge, Massachusetts, office.

Permanent position; Excellent Employee Benefits

Please send resume stating salary desired

BADGER MANUFACTURING COMPANY
230 Bent Street Cambridge 41, Mass.

YOUR ORGANIZATION

Is it complete?
Are you expanding it?
Making Replacements?

Naturally, you are anxious to secure the most suitable man or men available. You want men with special training that will make them an asset to your organization. You can contact such men through an advertisement in the Employment Opportunities Section of ENGINEERING NEWS-RECORD.

Classified Advertising Division—

ENGINEERING NEWS-RECORD
P. O. Box 12 New York 36, N. Y.

REPLIES (Box No.): Address to office nearest you c/o This publication Classified Adv. Div.
NEW YORK: P. O. Box 12 (36)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)

SEARCHLIGHT SECTION

(Classified Advertising)

BUSINESS OPPORTUNITIES **EQUIPMENT - USED or RESALE**

SPECIAL SERVICE

Consulting Service Offered on all types of building construction-wide experience in all phases—from planning stage, awarding of contracts, supervision, to completed project —fee reasonable. SS-4846, Engineering News-Record.

BUSINESS OPPORTUNITY

We have an outstanding Sand & Gravel Deposit in Penna. proven and tested which will show annual profit of $200,000, we need partner with $40,000, act quick. BO-4916, Engineering News-Record.

WANTED

Anything within reason that is wanted in the field served by Engineering News-Record can be quickly located through bringing it to the attention of thousands of men whose interest is assured because this is the business paper they read.

WANTED
COMPLETE CONCRETE PIPE PLANT
Give Type, Model of Machinery
Size of Plant and Property
BO-4827, Engineering News-Record
Class. Adv. Div., P.O. Box 12, N.Y. 36, N.Y.

BUSINESS FOR SALE
Well established Soil and Rock Exploration business is offered for sale. This includes all equipment necessary for operation. If interested and want detailed information, call Independence 3-5000 before 5 P. M. and after: Myrtle 2-6814. Ask for Mr. Silveri, or write
SILVERI DRILLING COMPANY
Box 177 Cold Spring Harbor, L. I., New York

LEASING
HOUSE TRAILERS
Rental may apply to purchase price.
HURST PONTIAC CO.
401 N. Main St. Edwardsville, Ill.

STRUCTURAL ENGINEERING
ARCHITECTURAL ENGINEERING
OUR COURSES of instruction by mail HAVE HELPED THOUSANDS to better positions and to pass State Board Examinations. Forty-third year
Write today without obligation
WILSON *Engineering Corp.*
College House Offices HARVARD SQ. CAMBRIDGE, MASS.

WANTED
Blaw Knox (APSCO) Widener
Advise age, condition, location, and price
W-4817, Engineering News Record
Class. Adv. Div.,
P. O. Box 12, N. Y. 36, N. Y.

FOR SALE or RENT
New Model 3-100 American Steel Erectors Guy Derrick - 100' Boom, 110' Mast, complete without running cable and hoist.
THE HUNTER CONSTRUCTION COMPANY
P. O. Box 444 East Chicago, Indiana
Telephone: East Chicago 5002

FOR SALE
LIKE NEW 200 D REX PUMPCRETE
Complete with Pipe in Perfect Condition.
Ready for Immediate Work.
G. A. COONEY
2128 Hudson Avenue, Chicago 14, Illinois
Financial 6-0456

TWIN 6-71 GM DIESELS

Two Model 12103 GM Twin Diesels equipped with heavy-duty transfer gear with 1.77:1 reduction ratio, two 24-volt starting motors and variable speed governors.

These engines were removed from a crushing plant a year ago and completely rebuilt at a cost of more than $6000.00. The owner now has utility power and the engines have not been re-installed.

They are suitable for rock crushing, pumping or generator applications and are offered at a fraction of today's replacement cost.....$5,800.00 each

FRANTZ GM DIESEL, Inc.
4152 E. Thompson Street Philadelphia 37, Penna.
Phone: Pioneer 3-3204

FOR SALE
25 TON BAY CITY . . . PRICED TO SELL

Bay City 25 ton Model 190 carrier mounted crane, purchased new in April 1956 and equipped with 30 pin connected boom, three 20' extensions, one 10' extension, one 15' jib; power load lowering device, swing brakes, boom backstop, Waukesha 140GK power. Mounted on carrier with sliding outriggers, rear outriggers (removable), screw type pontoons, 12.00 x 20 14 ply tires, Model 140GK Waukesha engine.

Available Immediately. For Prices call, write or wire
H. W. MOORE EQUIPMENT COMPANY
5990 Colorado Blvd. *Phone ATlas 8-0771* Denver, Colo.

FOR SALE
34—used D-8 Caterpillar Tractors
with cable controlled Angledozers.
Late models. Cleaned and painted.

WANTED
Your idle inventories of road building and earth moving equipment.

MACHINERY EXPEDITERS
Our 16th year
170 Broadway New York 38, N. Y.

EIMCO TRACTOR LOADER
One (1) Model 105 Eimco Tractor Loader, equipped with Cummins Diesel Engine, Allison Torque Converter and all standard equipment and accessories
Serial No. 1050197
Engine Serial No. 139265
WALSH, PERINI, MORRISON, KIEWIT, UTAH CO'S
P. O. Box 106, Massena, N. Y.
Phone: Rockwell 9-2456

FREE!

Here is one of the most complete lists of used construction equipment available anywhere. Contains all used equipment offered at State's branches. Ask for your free copy by writing Andy H. Croft at:

STATE
EQUIPMENT COMPANIES
3725 North Front Street
Harrisburg, Pennsylvania

—FOR SALE—
1—Buckeye Trencher Model C-15-ladder type—digs 24" to 60" wide by 20' depth. Good operating condition, $7500.00.
1—Buckeye Trencher Model 203, digs 24" to 42" wide by 20' depth. Good operating condition, $9,000.00 Both machines just finished job recently and are located at Defiance, Ohio.
BOCK & KNAPP CONST. CO.
P. O. Box 836 Fort Wayne, Indiana
Phone E-5402

FOR SALE
INDUSTRIAL BROWNHOIST
Model 8 Locomotive Crane, 40-ton, driven by Cat. 13000 diesel engine.
AIR COMPRESSOR RENTAL CO. INC.
19615 Nottingham Rd. Cleveland 10, Ohio

FOR SALE OR RENT

CRANES

1—30-ton Browning Locomotive Crane Model M1, D-13000 diesel engine, with 70' boom. Cap. 63-000# @ 12' radius. Excellent condition.

1—Industrial Brownhoist Locomotive Crane, Model L, Steam, with oil-fired boiler, 110' boom, serial #5049. 40-50 ton capacity. Priced for quick sale.

1—Model 820 Lorain, serial #18221, 90' boom, capacity 2 yds. 6-cyl. D-13000 Caterpillar diesel engine. Thoroughly rebuilt.

ROLLERS

1—Tampo Pneumatic-Tired Model R13, with 13 pneumatic tires, size 7.50x15. Rolling width 84" Weight empty 3500#. Weight with ballast 28,000#.

2—Tandem: 1—Austin Western 5-8 ton variable weight, diesel powered, hydraulic steering. Thoroughly rebuilt. 1—Buffalo-Springfield 8-ton, gas. powered, mechanical steering. Good operating condition.

TRENCHERS

2—Buckeye Md1 12: 1 diesel powered; 1 gasoline powered. Max. digging width 24", depth 5½". Thoroughly rebuilt.

JET CRETE OUTFIT

Model 240 CMC Jet Crete, 6 cu. ft. Mixer, trailer-mounted.

GENERATOR

1—100 KW Ideal AC, 127/220/230/400/440 volt, 3 ph., 50 or 60 cycle, with Hercules DNX diesel engine, skid mounted. Weight 16,170#.

PILE DRIVING EQUIPMENT

2—#1 Vulcan Hammers with standard base.
5—#2 Vulcan Hammers: 2 with McDermid base; 3 with standard base.

McKiernan-Terry Hammers: 11B3, 10B3, 9B3, 9B2, 7, 6, 5, 3 and 1.

Write for New Stock List No. 456

Equipment Corporation of America

CLIFTON HEIGHTS, PA., Box J-608, Sub. of Phila.
GROVETON, PA., Box 43-J, Sub. of Pittsb.
CHICAGO 4, ILL., 327-J So. La Salle St.
NEW YORK 7, N. Y., 30-J Church St.

FOR SALE

HOPPER-DREDGE DIESEL OPERATED BOTTOM DUMP

H. P. GUION
(Dredge-Broker)
6050 Riverdale Ave.
N. Y. 71, N. Y.
Tele: KI-9-8245-6

PILE DRIVING EQUIPMENT

VULCAN AND McKIERNAN-TERRY
Steam Pile Hammers and Extractors

- DROP HAMMERS
- DRIVING CAPS
- STEEL LEADS
- PILE DRIVER HOSE
- HOISTS AND BOILERS
- STEEL SHEET PILING

CONMACO
CONTRACTORS MACHINERY COMPANY
820A KANSAS AVE., KANSAS CITY, KANS. • DRexel 1-3930

DON'T WAIT
WF-H BEAMS
PILE SECTIONS
NEW · USED · IN STOCK

8"	BP	36#
10"	BP	42#
12"	BP	53#
14"	BP	73#
14"	BP	89#
14"	BP	102#
14"	BP	117#

We are also interested in purchasing your surplus material.

We assure you our prices will be the best obtainable.

Call **HY DRACHMAN**
STEEL CORPORATION
52-25 2nd Street
Long Island City, N. Y.
Phone: RAvenswood 9-1262

FOR SALE

2—Bucyrus Erie 54-B, Diesel Powered Combination High Lift 2 C.Y. Shovel 100 ft. Crane-Dragline Boom and One 30 ft. Jib. Ser. Nos. 41559 & 37279. Recently overhauled in excellent condition.

1—Lima 1201, High Lift Shovel Boom 42 ft. and 2½ C.Y. Bucket.

7—Caterpillar D-8 Tractors-Bulldozers Serial Nos. 2U1789, 2U1692, 8R9223SP 8R778SP, 8R776SP, 8R775SP and 1H6738.

PERINI CORPORATION
Framingham, Mass.
Tel. TRinity 3-7445

LOW COST INSTALLATION AND OPERATION

CABLEWAYS
IMMEDIATE SHIPMENT
ELECTRIC, STEAM OR DIESEL
CAPACITY 3 TO 20 TONS
SELL, RENT OR BUY

FOR DAMS, BRIDGES, BREAKWATERS, FILTRATION AND SEWERAGE PLANTS

FOR SPEED, ECONOMY, EFFICIENCY, FLOOD SAFETY, LABOR REDUCTION

AMBURSEN DAM CO. INC.
295 MADISON AVE NEW YORK

FOR SALE

1954 ½ cubic yard Link Belt, Model LS-50, with 40' boom, backhoe and shovel, front drag and clam buckets, serial #SD-551

One (1) 1947 160 Buckeye Trencher

One (1) 221 Parson Serial #1709 Trencher

One (1) Rapid paving breaker, Serial #188.

G. L. TARLTON CONTRACTING CO.
5500 WEST PARK AVENUE
ST. LOUIS 10, MISSOURI

FOR IMMEDIATE SHIPMENT
f.o.b. MASSENA, N. Y.

2—10" to 16" H Beam Helmets
3—Sheeting Helmets for SP 6A Pile Section

WALSH, PERINI, MORRISON, KIEWIT, UTAH CO'S
P.O. Box 106, Massena, N. Y.
Phone: ROckwell 9-2456

FOR SALE

3—NEW Euclid Model 22TDT - 122W Bottom Dumps, with 17 Yard Wagon, 10-Speed Transmission. G.M. 6-110 Power. Located Pittsburgh, Penna.

ANDERSON EQUIPMENT CO.
P. O. Box 1737 Pittsburgh 30, Pa.
Phone: LEhigh 1-6020

PUMPCRETE
Current Models Sale or Rent
Engineering Service & Parts
R. T. SHERROD
Concrete Equipment Company
Jones Island, Milwaukee 7, Wis.

FOR SALE

48B Bucyrus Erie Shovel diesel 2 cy
10,000' 9" x 9" road forms
1,550' 6" x 6" road forms*
2,500' 16" x 12" airport forms*
*Used four months only

WILLIAMS CONSTRUCTION COMPANY
Box 5045 Balto. 20, Md. Murdock 6-6800

FOR SALE OR RENT

1—25 ton Bay City Truck Crane
1—45 ton G.E. Diesel Electric Locomotive
1—115 ton Baldwin Diesel Electric Locomotive
1—25 ton American Diesel Locomotive Crane
1—50 ton American Diesel Locomotive Crane

B. M. WEISS COMPANY
Girard Trust Bldg. Philadelphia 2, Pa.

Additional Searchlight Advertising on page 150.

PROFESSIONAL SERVICES

Cards arranged by areas, states, cities, names

Additional cards on following pages

NEW ENGLAND

Goodkind & O'Dea

Consulting Engineers

Design and Supervision
Foundations, Structures, Highways
1214 Dixwell Ave. Hamden, Conn.
610 Bloomfield Ave., Bloomfield, N. J.
325 Spring Street, New York 7, N. Y.

The Clarkeson Engineering Co., Inc.

Engineers and Consultants

Bridges and Highways, Expressways
Investigations and Reports, Supervision of Construction. Traffic and Parking Studies, Waterfront Facilities
285 Columbus Avenue, Boston 16, Mass.
1609 Conn. Ave., N.W., Wash., D. C.

Fay, Spofford & Thorndike, Inc.

Engineers

Airports, Bridges, Turnpikes
Water Supply, Sewerage and Drainage
Port and Terminal Works
Industrial Buildings

Designs — Investigations
Supervision of Construction

Boston, Massachusetts

Jackson & Moreland, Inc.

Engineers and Consultants

Design and Supervision of Construction

Reports — Examinations — Appraisals

Machine Design—Technical Publications
Boston — New York

Chas. T. Main, Inc.

Engineers

Design and Supervision of Construction for Industrial Plants—Electrical, Steam and Hydraulic Engineering—Investigations, Reports, and Appraisals.

80 Federal Street, Boston, Massachusetts

Metcalf & Eddy

ENGINEERS

Investigations — Reports — Design
Supervision of Construction and Operation
Management — Valuation — Laboratory
1300 Statler Building, Boston 16

Moore Survey & Mapping Corp

Engineers — *Surveyors*

Aerial surveys, Ground surveys, Geodetic Control, Hydrographic surveys, Construction surveys, Tax Maps.
11 Maple Ave. Shrewsbury, Mass.

C. W. Riva Co.

Engineers

Edgar P. Snow — Robert C. Barker
John F. Westman — John H. Grauss

Highways, Bridges, Tunnels, Airports, Foundations, Sewerage, Water Supply.
511 Westminster St., Providence 3, R. I.

MIDDLE ATLANTIC

Airways Engineering Corp.

Airports, highways, dams, fuel storage, pipe lines, aerial topographic mapping.
1212 - 18th St., N.W.,
Washington 6, D. C.
Phone: REpublic 7-8121

Ewin Engineering Corporation

Designers of Port Facilities, Foundations, Industrial Plants, Bridges, Highways, Sewage Disposal and Municipal Projects.
1367 Connecticut Ave. N.W.
Washington, D. C.
Miami, Florida — Mobile, Alabama

Green Associates, Inc.

Consulting Engineers

Civil, Mechanical, Electrical
Baltimore, Md., Pittsburgh, Pa.

Penniman & Browne, Inc.

Engineering Division

Soils Engineering—Test Borings Load Testing—Asphalt & Concrete Design—Field and Plant Control Steel Inspection—Mobile X-Ray
341 St. Paul Place, Baltimore 2, Md.

Whitman, Requardt & Associates

Engineers—Consultants

Civil—Sanitary—Structural
Mechanical—Electrical
Reports, Plans, Supervision, Appraisals
1304 St. Paul St., Baltimore 2, Md.

Maddox and Hopkins

Engineers and Surveyors

Plane and Geodetic Surveys
Topographic Maps - Photogrammetry

Highways, Utilities, Structures
8506 Dixon Ave., Silver Springs, Md.

Fort Lee Construction Co:

Engineers and Constructors

For modern, efficient, design and erection, commercial and industrial, reinforced concrete, structural steel and timber. Complete projects, from inception to completion, based on 25 years continuous successful experience.

Main office 248 Main street, Fort Lee, New Jersey. Telephone Windsor 4-7344.

Berger Associates

Consulting Engineers

Studies, Design, Supervision
Expressways — Airfields
Structures — Foundations
177 Oakwood Ave. Orange, N. J.
Baltimore, Md.

Greer Engineering Associates

SOIL MECHANICS

Foundation Designs and Analyses
Airphoto Soils and Geological Mapping
Field and Laboratory Soil Tests

98 Greenwood Ave. Montclair, N. J.

Joseph S. Ward

Consulting Soil and Foundation Engineer

Site Investigation, Laboratory Soil Testing, Foundation Analysis, Highways, Airports, Engineering Reports and Consultation.
605 Valley Rd., Upper Montclair, N. J.

Edwards, Kelcey & Beck

Consulting Engineers

Reports, Design, Supervision
Subways, Expressways, Traffic, Parking
Harbor Works, Bridges, Tunnels
Housing and Industrial Developments
Newark, New Jersey
New York — Philadelphia — Boston

Porter, Urquhart, McCreary & O'Brien

O. J. Porter & Co.

CONSULTING ENGINEERS

Airports — Highways — Expressways — Buildings — Bridges — Dams — Harbors — Foundations — Stabilization — Pavements
Reports, Designs & Supervision

415 Frelinghuysen Ave., Newark 5, N.J.

625 Eighth Avenue, New York 18, N.Y.
3568 W. Third St., Los Angeles 5, Cal.
1140 Howard St., San Francisco 3, Cal.
516 Ninth Street, Sacramento 14, Cal.

Boswell Engineering Co.

Founded 1925

Ridgefield Park, N. J. — Trenton, N. J.

Design — Reports — Investigations
Surveys — Const. Supervision
Highways — Bridges — Airports

Frank E. Harley and Associates

Consulting Engineers

Design, Surveys, Plans and Construction Highways, Sewerage and Sewage Treatment, Water Supply and Purification, Municipal Problems.
Harley Bldg., 260 Godwin, Wyckoff, N. J.

B. K. Hough

Consulting Engineer
Soils & Foundation Engineering

Site investigations, soil testing, design analysis for earthworks, foundations and pavements, field inspection, engineering reports, consultation.
121 E. Seneca St., Ithaca, New York

Ammann & Whitney

Consulting Engineers

Design and Supervision of Construction of Bridges, Highways, Expressways, Buildings, Special Structures, Airport Facilities.
111 Eighth Ave., New York 11, N. Y.
724 E. Mason St., Milwaukee 2, Wisc.

Barker & Wheeler

Water Supply — Utility and
Sewerage — Industrial
Sewage Disposal — Valuations
Power Systems — Reports

New York City, 11 Park Place
Albany, N. Y., 36 State St.

Barstow, Mulligan & Vollmer

Engineers

Surveys, Design & Construction Supervision, Highways, Expressways, Parks
Movable and long-span bridges
Prestressed Structures — City-Planning and Municipal Engineering
49 W. 45 St. New York 36 N. Y.

Bogert and Childs

Consulting Engineers

Clinton L. Bogert — Fred S. Childs
Ivan L. Bogert — Donald M. Ditmars
Robert A. Lincoln — Charles A. Manganaro
William Martin

Water & Sewage Works — Refuse Disposal
Drainage — Flood Control
Highways & Bridges — Airfields
145 E. 32nd St. New York 16, N. Y.

Bowe, Albertson & Associates

Engineers

Sewage and Water Works — Industrial Wastes — Refuse Disposal — Municipal Projects — Industrial Buildings — Reports — Plans — Specifications — Supervision of Construction and Operation — Valuations — Laboratory Service
75 West Street New York 6, New York

Brown & Blauvelt

CONSULTING ENGINEERS

Expressways, Highways, Parkways
Airports, Bridges, Dams, Water Supply

Industrial and Chemical Plants
Sewage Disposal

Preliminary Reports, Engineering Design, Construction Supervision

488 Fourth Ave., New York 16, N. Y.

Buck, Seifert and Jost

Consulting Engineers

Water Supply — Sewerage — Hydraulic Developments—Reports and Valuations,
Chemical and Biological Laboratories.
New York City, 112 E. 19th St.

Cotton, Pierce, Streander, Inc.

Associated Engineering Consultants

Water Supply, Treatment, Distribution
Sewage, Sewage Treatment
Refuse Disposal, Trade Wastes
Power Plants

Reports, Plans, Supervision

132 Nassau St., New York, N. Y.
55 Caroline Road, Gowanda, N. Y.
2718 Garfield St., Hollywood, Fla.
Colon 106, Havana, Cuba.

Ebasco Services Inc.

ENGINEERS
CONSTRUCTORS
BUSINESS CONSULTANTS

Design and Construction
Financial and Operating Consultation
Investigations and Reports
Consulting Engineering
Appraisal

Two Rector Street — New York
209 S. LaSalle Street — Chic. 4, Ill.
204 Southland Life Bldg. — Dallas 1, Texas
611 Equitable Bldg. — Portland 4, Ore.
1625 Eye Street, N.W. — Wash. 4, D. C.

Hazen and Sawyer

Engineers

Water and Sewerage Works
Industrial Waste Disposal
Drainage and Flood Control
Reports, Design, Supervision of Construction and Operation
Appraisals and Rates

122 East 42nd St. — 3333 Book Tower
New York 17, N. Y. — Detroit 26, Mich.

Hardesty & Hanover

Consulting Engineers

Bridges
Long Spans of All Types
Movable—Lift, Bascule and Swing
Hanover Skew Bascule
Steel and Concrete Spans
Grade Crossing Eliminations

Expressways and Thruways
Other Structures
Foundations
Supervision, Reports, Appraisals

101 Park Avenue, New York 17, N. Y.

Frederic R. Harris, Inc.

CONSULTING ENGINEERS

Reports • Feasibility Studies • Evaluations • Designs • Port Development
Foundations • Highways and Bridges
Shipyards • Marine Structures • Floating Dry Docks • Graving Docks • Bulkheads • Piers • Wharves • Power Plants • Industrial Buildings

27 William Street, New York 5, N. Y.

1915 Tulane Avenue, New Orleans, La.

Howard, Needles, Tammen & Bergendoff

Consulting Engineers
Bridges, Structures, Foundations, Express Highways
Administrative Services

1805 Grand Ave., 99 Church St.
Kansas City 8, Mo., New York 7, N. Y.

Hunting Technical Services

Natural Resources Consultants

Geological and soils surveys for engineering, irrigation, agricultural, mineral & oil projects in U.S.A. and overseas.
57 Park Ave., New York 16, N. Y.

London — Baghdad — Toronto
Johannesburg — Sydney — Caracas

King & Gavaris

CONSULTING ENGINEERS

Bridges, Highways, Toll Roads
Arterials - Foundations
Reports, Investigations, Surveys
Supervision of Construction

425 Lexington Ave. — 18 Mix Ave.
New York — West Haven, Conn.

Moran, Proctor Mueser & Rutledge

Consulting Engineers

Foundations for Buildings, Bridges and Dams; Tunnels, Bulkheads, Marine Structures; Soil Studies and Tests; Reports, design and supervision.

415 Madison Ave., New York 17, N. Y.
Eldorado 5-4800

Parsons, Brinckerhoff, Hall & Macdonald

ENGINEERS

Bridges, Highways, Tunnels, Airports, Subways, Harbor Works, Dams, Canals, Traffic Parking and Transportation Reports. Power, Industrial Buildings, Housing, Sewerage and Water Supply.

51 Broadway, New York 6, N. Y.

PROFESSIONAL SERVICES

Cards arranged by areas, states, cities, names — Additional cards on preceding and following pages

E. Lionel Pavlo

Consulting Engineer

Design, Supervision, Reports
Bridges, Highways, Expressways
Marine Structures, Public Works
Industrial Construction, Airports

7 E 47th St. New York 17, N. Y.

Malcolm Pirnie Engineers

Malcolm Pirnie Ernest W. Whitlock
Robert D. Mitchell Carl A. Arenander
Malcolm Pirnie, Jr.

MUNICIPAL & INDUSTRIAL

Water Supply - Water Treatment

Sewage and Waste Treatment

Drainage - Sewerage - Refuse Disposal

25 West 43rd St., New York 36, N. Y.

The Pitometer Associates

Engineers
Water Waste Surveys
Trunk Main Surveys
Water Distribution Studies
Water Measurements & Special
Hydraulic Investigations

New York, 50 Church St.

Alexander Potter Associates

Consulting Engineers

Water Works, Sewerage, Industrial Waste, Hydraulic Works, Reports, Designs, Appraisals.

50 Church St., New York, N. Y.

Clyde Potts Assoc.

Weston Gavett - Stanley N. Williams
Consulting Sanitary Engineers
Sewerage and Sewage Disposal
Water Works and Water Supply
Valuations and Appraisals

30 Church Street, New York 7

Praeger-Kavanagh

Engineers

126 East 38th St., New York 16, N. Y.

Roos and Snow

Consulting Engineers

Reports, Design and Supervision
Highways, Expressways & Structures

144 East 30 Street—New York, N. Y.
Providence, R. I.—Binghamton, N. Y.

Sanderson & Porter Construction

Reports Surveys

New York New York

Scheidenhelm, F. W.

Consulting Engineers

Hydraulic Engineering; Hydro-electric Development; Water Supply; Flood Control; Engineering Problems relating to Water Rights and Water Power Law; Appraisals. 50 Church Street, New York 7, N. Y.

Seelye Stevenson Value & Knecht *Consulting Engineers*

Richard E. Dougherty, Consultant

Airports, Highways, Bridges, Dams, Water Supply, Sanitation, Railroads, Piers, Industrial Plants, Reinforced Concrete, Steel, Industrial Waste Disposal, Foundations, Soil Studies, Real Estate Development
Civil — Mechanical — Electrical

101 Park Avenue New York 17, N. Y.

Severud-Elstad-Krueger

Consulting Engineers

Structural Design - Supervision
Reports - Buildings - Airports
Special Structures

415 Lexington Avenue
New York 17, N. Y.

Frederick Snare Corporation

Engineers—Contractors

Harbor Works, Bridges, Power Plants, Dams, Docks and Terminals.

Difficult and Unusual Foundations A Specialty.

233 Broadway, New York City 7

Havana, Cuba Lima, Peru
Bogota, Colombia, Caracas, Venezuela

Singstad & Baillie

Consulting Engineers

Ole Singstad David G. Baillie, Jr.
Tunnels, Subways, Highways
Foundations, Parking Garages

24 State St. New York 4, N. Y.

D. B. Steinman

Consulting Engineer

BRIDGES
HIGHWAYS

Design, Construction

Strengthening, Investigations.

Reports, Advisory Service

117 Liberty St., New York 6, N. Y.

Henry W. Taylor

Consulting Engineer

Water Supply, Sewerage
Refuse Disposal, Incineration
Industrial Developments

151 W. Merrick Rd., Freeport, N. Y.

Tippetts-Abbett-McCarthy-Stratton

Engineers

Ports, Harbors, Flood Control, Power Dams, Bridges, Tunnels, Highways, Subways, Airports, Traffic Foundations, Water Supply, Sewerage, Reports, Design, Supervision, Consultation.

62 West 47th Street, New York City

The J. G. White Engineering Corporation

Design — Construction
Reports — Appraisals

80 Broad Street, New York

Lev Zetlin

CONSULTING ENGINEER

Design and Supervision of Special Structures, Hangars, Auditoriums, Industrial Plants, Hospitals.

Engineering Consultations and Reports on Special Structural Problems.

1265 Broadway New York 1, N. Y.

Keis & Holroyd

Consulting Engineers
Formerly Solomon & Keis
Since 1906
Water Supply, Sewage Disposal, Garbage & Refuse Incineration, Industrial buildings.

Troy, N. Y. Ft. Lauderdale, Fla.

Frederic A. Nassaux

Consulting Engineer
Prestressed Concrete—Reinforced Conc.
Structural Steel.
Buildings, Bridges, Structures.
Precast & Prestressed Conc. Man. Plants.
Design & Supervision
R. 226 Trust Building—Chambersburg, Pa.

Capitol Engineering Corporation

Engineers—Constructors—Management
Bridges Dams
Planning Airports
Sewage Systems Water Works
Design and Surveys Roads & Streets
Executive Offices, Dillsburg, Penna.

Robert W. Lowry, Inc.

Consulting Engineers

Robert W. Lowry M. Lepkaluk
Design, Supervision, Reports, Long Span & Movable Bridges, Expressways, Highways, Airports, Prestress Design, Stress Analysis & Strengthening

227 Pine Street, Harrisburg, Pa.
122 E. 42nd Street, N. Y., N. Y.

Gannett Fleming Corddry & Carpenter, Inc.

ENGINEERS

Dams, Water Works, Sewage, Industrial Wastes & Garbage Disposal, Highways, Bridges & Airports
Traffic & Parking — Appraisals, Investigations & Reports.

Harrisburg, Penna

Branch Offices
Pittsburgh, Pa. Philadelphia, Pa.
Daytona Beach, Fla.

Modjeski and Masters

Consulting Engineers

Bridges and other Structures
Foundations
Highways and Expressways

State Street Bldg., Harrisburg, Pa.
Philadelphia - Miami - New Orleans

Aero Service Corporation

Aerial topographic maps — photo-maps for engineering projects anywhere in the world—highways, railroads, cities, power and pipe lines, mining development. Soil studies and electronic surveys of large areas; resources inventories.

210 E. Courtland Philadelphia 20

Albright & Friel Inc.

Consulting Engineers

Water, Sewage, Industrial Wastes and Incineration Problems, City Planning, Highways, Bridges and Airports, Dams, Flood Control, Industrial Buildings, Investigations, Reports, Appraisals and Rates, Laboratory

3 Penn Center Plaza Phila. 2, Penn.

Fridy, Gauker, Truscott & Fridy, Inc.

Architects & Engineers

Water, Sewer, Waste Disposal, Roads, Airports, Power & Lighting, Petroleum Facilities, Hospitals, Schools, Public & Industrial Buildings, Reports, Plans, Supervision, Appraisals.

1321 Arch St. Philadelphia 7, Pa.

Harris-Dechant Associates

Frederick H. Dechant
Consulting Engineer

Water Works, Industrial Wastes, Sewerage, Recovery Processes, Hydraulic Works, Natural Gas Transmission and Distribution.

123 So. Broad St., Philadelphia 9, Pa.

Justin & Courtney

Consulting Engineers

Joel B. Justin - Neville C. Courtney
Dams and Power Problems, Hydroelectric, River Basin Developments, Water Supply, Foundations

121 South Broad Street
Philadelphia 7, Pa.

The Kuljian Corporation

Engineers • Consultants • Contractors

Power Plants, Airports & Facilities, Highways, Industrial Plants, Water & Sewage Works, Pumping Stations, Flood Control, Irrigation.

1290 N. Broad St., Phila. 21, Pa.

Yule, Sticklen, Jordan & McNee

ENGINEERS

Bridges, Highways, Airports
Design, Investigations, Reports
Supervision of Construction
Civil, Structural, Mechanical
& Electrical

309 South Broad St., Philadelphia 7, Pa.
23rd & Market Sts., Camp Hill, Pa.
5564 North High St., Columbus, Ohio

American Air Surveys, Inc.

TOPOGRAPHIC MAPS & AERIAL PHOTOS FOR
• Highways • Airports • Power & Pipe Lines • Railroads • Mining • All types construction • Stockpile inventories

907 Penn Ave. Pittsburgh 22, Pa.

Morris Knowles Inc.

Engineers

Water Supply and Purification Sewerage and Sewage Disposal, Valuations, Laboratory, City Planning.

Pittsburgh, Pa.

Peter F. Loftus Corporation

Design and Consulting Engineers

Electrical • Mechanical • Structural
Civil • Thermodynamic • Architectural

First National Bank Building
Pittsburgh 22, Pennsylvania

Sanders & Thomas, Inc.

Consulting & Contracting Engineers
Civil Structural Sanitary
Mechanical Electrical
Reports Plans, Supervision
Construction

POTTSTOWN, PA. Reading, Pa.
Philadelphia, Pa. Washington, D. C.

Gilbert Associates, Inc.

Engineers and Consultants

Design and Supervision of Construction
Mechanical • Electrical • Structural •
Sanitary • Economic Research
• Chemical Laboratory

New York•Reading, Pa.•Washington

Michael Baker, Jr., Inc.

Consulting Engineers, Civil Engineers, Planners & Surveyors; Airports & Highway Design; Water Works & Sewerage Design & Operation; Aerial Topo Maps; Surveys; Reports & Investigations; Irrigation. Home Off.—Rochester, Pa. Br. Off.: Jackson, Miss.; Harrisburg, Pa.; College Park, Md.

Sprague & Henwood, Inc.

Drilling Services

Foundation Investigations, Soil Testing & Test Borings, Grout Hole Drilling & Pressure Grouting, Diamond Core Drilling

Main Office
221 W. Olive Street, Scranton, Pa.

Branches:
1909 Western Savings Fund Bldg., Philadelphia, Pa.
11 W. 42nd St., New York, New York
200 Magee Bldg., Pittsburgh, Pa.
1249 Church St., Decatur, Ga.
Box 645—Grand Junction, Colorado
Buchans, Newfoundland

SOUTH

Harry Hendon and Associates

ENGINEERS
(Formerly Polk, Powell and Hendon)
Harry H. Hendon L. E. Hoffmann
A. B. Jowers
Civil Engineers—Public Utilities

10 Office Park Circle, Mountain Brook
Birmingham 9, Alabama

Palmer and Baker, Inc.

Consulting Engineers - Architects

Surveys-Reports-Design-Supervision
Consultation

Transportation and Traffic Problems
Tunnels-Bridges-Highways-Airports
Industrial Buildings
Waterfront and Harbor Structures
Graving and Floating Dry Docks
Complete Soils, Materials and Chemical Laboratories

Mobile, Ala. New Orleans, La.
Harvey, La.

THE CONSULTING ENGINEER

By reason of special training, wide experience and tested ability, coupled with professional integrity, the consulting engineer brings to his client detached engineering and economic advice that rises above local limitations and encompasses the availability of all modern developments in the fields where he practices as an expert.

PROFESSIONAL SERVICES

Cards arranged by areas, states, cities, names — Additional cards on preceding and following pages

Rader and Associates

Engineers - Architects

Sewage Disposal, Water Works, Ports, Airports, Bridges, Highways, Office and Commercial Buildings Industrial Plants Reports Investigations Consultations.

111 N.E. 2nd Ave. Miami 32 Florida

Duval Engineering & Contracting Co.

General Contractors

FOUNDATION BORINGS
For Engineers and Architects.

Jacksonville — Florida

Law-Barrow-Agee Laboratories, Inc.

Soils Engineers & Consultants

Soil Testing — Soil Boring — Rock Drilling—Load Testing—Field Control —Engineering Studies—Chemical Analysis—Physical Testing

Box 1558 Atlanta 1 Ga.
Serving the entire South

Patchen and Zimmerman Engineers

Bridges, Expressways, Dams, Hydro and Steam Power, Chemical, Process and Industrial Plants, Water Supply and Sewage Treatment, Investigations, Reports, Design, Supervision.

Augusta, Georgia — Atlanta, Georgia

Engineers Testing Laboratory, Inc.

Soil Mechanics and Foundation Engineering

Soil Borings — Laboratory Tests
Foundation Analyses — Reports

2116 Canada Dry St. Houston 23, Texas
444 North 9th St. Baton Rouge, La.

Eustis Engineering Company

FOUNDATION AND SOIL MECHANICS INVESTIGATIONS

Soil Borings — *Laboratory Test*
Foundation Analyses — *Reports*

3635 Airline Highway
Metairie, Louisiana

Southern Mapping & Engineering Company

Planners and Surveyors:

Airports, Highway, Water, Sewage, Topography, Reports, Investigations, Pipe Line Surveys, Acquisition of Right-of-way.

216 Commerce Pl., Greensboro, N. C.

Schmidt Engineering Co.

Consulting Engineer

Investigations, Reports, Designs, Supervision Heavy Construction—Dams and Hydroelectric Projects—Foundation Explorations and Treatment—Water and Sewerage Works—Bridges & Highways

317 Broad St. — Chattanooga 2, Tenn.

MIDDLE WEST

Alvord, Burdick & Howson

CONSULTING ENGINEERS

Water Works — Sewerage
Water Purification — Sewage Treatment
Flood Relief — Power Generation
Drainage — Appraisals

20 North Wacker Drive, Chicago

Consoer, Townsend & Associates

Water Supply, Sewerage, Flood Control & Drainage, Bridges, Express Highways, Paving, Power Plants, Appraisals, Reports, Traffic Studies, Airports, Gas & Electric Transmission Lines.

360 East Grand Ave., Chicago 11, Ill.

THIS SECTION is available to consulting engineers to contact prospective clients every week or every other week.

A. J. Boynton & Co.

ENGINEERS

Fixed and Movable Bridges
Structures
Foundations
Design
Construction

111 N. Wabash Ave., Chicago 2.

Ralph H. Burke, Inc.

CONSULTING ENGINEERS

Complete Architectural and Engineering Services
Plans, Supervision, and Reports

Expressways - Grade Separations
Traffic Studies - Parking Structures
Underground Garages - Shore Protection
Parks - Field Houses - Municipal Works
Airports and Air Terminal Buildings

20 North Wacker Drive, Chicago 6, Ill.

De Leuw, Cather & Company

CONSULTING ENGINEERS

Public Transit — Subways
Traffic & Parking — Railroad Facilities
Expressways — Industrial Plants
Grade Separations — Municipal Works
Urban Renewal — Port Development

150 North Wacker Drive, Chicago 6
San Francisco Toronto Oklahoma City

Greeley and Hansen

Engineers

Water Supply, Water Purification
Sewerage, Sewage Treatment
Flood Control, Drainage, Refuse Disposal

220 S. State Stret, Chicago 4

Harza Engineering Co.

Consulting Engineers

Calvin V. Davis — E. Montford Fucik
Richard D. Harza

Hydroelectric Plants & Dams
Transmission Lines
Flood Control, Irrigation
River Basin Development

400 West Madison Street — Chicago 6

Hazelet & Erdal

CONSULTING ENGINEERS

Fixed Bridges, Movable Bridges, Industrial Plants, Expressways, Airports, Dams

Monadnock Block, Chicago 4, Ill.
Dixie Terminal Bldg., Cincinnati 2, O.
Commerce Bldg., Louisville 2, Ky.

Pioneer Service & Engineering Co.

Consulting and Design Engineers
Operations - - - Purchasing
Steam - - Hydraulic - - Gas
Public Utilities - - Industrials

231 So. La Salle St. — Chicago 4

Sargent & Lundy

ENGINEERS

Steam and Electric Plants
Utilities—Industrials
Studies—Reports—Design
Supervision
Chicago

Mobile Drilling & Engineering Inc.

Foundation Engineering & Testing Division—Contract Drilling Division

Foundation Investigation, Analysis & Design—Earth Dam & Embankment Design—Pavement Design—Compaction Control—Soil Sampling & Testing—Core Drilling.

960 N. Penn. Ave., Indianapolis 4, Ind.

Chas. W. Cole & Son

Engineers - Architects

Sewerage, Water Supply, Bridges, Highways, Toll Roads, Industrial, Municipal and Commercial Buildings

220 W. LaSalle Ave., Central 4-0127
South Bend, Indiana

Westville Engineering Company, Inc.

ENGINEERS AND GEOLOGISTS

Foundation Test Bornings, Soil Sampling, Rock Coring, Engineering Geology Surveys—Soil Mechanics, Concrete and Bituminous Laboratory—Field Surveys of Construction Materials—Consultants on Arbitration Matters Concerning Soil Mechanics, Concrete and Bituminous Technology

Francisco J. Cordova, P.E.
President and Chief Engineer
P. O. Box 67 — Westville, Indiana

The Austin Company

Design and Construction
Manufacturing and Process Plants
Newspaper and Broadcasting Bldgs.
Power Plants—Industrial & Institutional
Industrial Office Buildings and Laboratories
Merchandising Bldgs. & Facilities
Plant Location Surveys

New York — CLEVELAND — Los Angeles
Chicago — Houston — Oakland
Detroit — Seattle

Havens and Emerson

W. L. Havens — A. A. Burger
J. W. Avery — H. H. Moseley
F. S. Palocsay — E. S. Ordway
F. C. Toles, Consultant

Water, Sewerage, Garbage, Industrial Wastes, Valuations—Laboratories

Leader Bldg. — Woolworth Bldg.
Cleveland 14 — New York 7

The Osborn Engineering Co.

DESIGNING-CONSULTING

Industrial Plants — Office Buildings
Stadiums — Grand Stands — Field Houses
Bridges — Garages — Laboratories

7016 Euclid Ave. — Cleveland 3, Ohio

Jones, Henry & Williams

Consulting Sanitary Engineers

Water Works, Sewerage & Treatment
Waste Disposal
Security Building — Toledo 4, Ohio

Toledo Testing Laboratory

Engineers—Chemists

Concrete—Soils—Asphalt
Inspection — Research
Tests — Development
Foundation Investigation
Borings—Diamond Drilling
Load Tests
Soils Mechanics Laboratory

1810 North 12th St. — Toledo 2, Ohio

WEST OF MISSISSIPPI

Heron Engineering Co.

Consulting Engineers

For all types of Aerial Tramways, Cableways, and Suspended Structures

2000 South Acoma St.
Denver 19, Colorado

Stanley Engineering Company

Consulting Engineers

Hershey Building — 208 S. LaSalle St.
Muscatine Ia. — Chicago 4, Ill.

CHECK this section whenever you need professional advice.

Black & Veatch

Consulting Engineers

Water - Sewage - Electricity - Industry Reports, Design, Supervision of Construction, Investigations, Valuation and Rates.

1500 Meadow Lake Parkway
Kansas City 14, Missouri

Burns & McDonnell

Engineers—Architects—Consultants

Kansas City, Missouri — Phone
P. O. Box 7088 — DElmar 3-4375

Harrington & Cortelyou

Consulting Engineers

Frank M. Cortelyou

E. M. Newman — F. M. Cortelyou, Jr.

Movable and Fixed Bridges of All Types, Foundation, and Related Structures.

1004 Baltimore — Kansas City 5, Mo.

Russell and Axon

Consulting Engineers

Civil — Sanitary — Structural
Industrial — Electrical
Rate Investigations

408 Olive St. — St. Louis 2, Mo.
Municipal Airport, Daytona Beach, Fla.

Sverdrup & Parcel, Inc.

Engineers—Architects

Bridges, Structures and Reports, Industrial and Power Plant Engineering

915 Olive St., St. Louis 1, Mo.
417 Montgomery St., San Francisco, Calif.

Benham Engineering Company

Established in 1909
Design and Consulting Engineers

215 N E 23rd Street
Oklahoma City 5, Oklahoma

Lockwood, Andrews & Newnam

Consulting Engineers

Navigation Facilities — Public Works
Airports — Earthworks — Roads,
Structural, Mechanical — Electrical
Reports — Design — Supervision
Surveys — Valuations
Corpus Christi—Houston—Victoria, Texas

McClelland Engineers, Inc.

Soil & Foundation Consultants

Investigations—Reports—Supervision
Borings & Tests

2640 N. Main — Houston 9, Tex.

National Soil Services

Consulting Engineers

Soils, Foundations, Ground-water
Ralph F. Reuss — Ray E. Hurst
Soil Borings — Laboratory Tests
Foundation Analyses and Reports
Groundwater Exploration and Evaluation

6134 Almeda — Houston, Texas

FAR WEST

International Engineering Company, Inc.

ENGINEERS

Investigations - Reports - Design
Procurement - Field Engineering
Domestic and Foreign

74 New Montgomery St.
San Francisco 5, California

CANADA

T. O. Lazarides, Lount and Partners

Consulting Engineers

Reports—Design—Construction Supervision Structures and Foundations
Special Analyses
Grids, shells, domes, complex design problems, bridges

209 Davenport Rd., Toronto, Canada

PROFESSIONAL SERVICES

Cards arranged by areas, states, cities, names — Additional cards on preceding pages

FOREIGN

Saenz-Cancio-Martin,

Ingenieros
Design and Supervision
Structural, Topographic, Soils and Hydraulic Engineering.
Ave. de la Independencia 774
Ensanche del Vedado Habana, Cuba

The Foundation Engineering Company of Puerto Rico

Consulting Engineers
Foundation and Soil Mechanics Investigations, Laboratory analyses, reports and recommendations, design of structures, supervision.
P. O. Box 821, San Juan, Puerto Rico

INSPECTION & TEST

A. W. Williams Inspection Co.

Established 1921—Member A.C.I.L.
Inspection — Testing — Analyses — Supervision. Foundation Investigations, Soil Borings, Soil Mechanics, Concrete and Asphalt Design and Control, Radiography, Sampling, Calibrations, Timber and timber treatment inspections. Complete testing laboratory service.
Main Office: 208 Virginia St., Mobile, Ala.

Richardson X-Ray Service

a corporation
Field X-ray, Gamma ray Inspection of Penstocks, Pipelines and related welded structures.
World Wide Service
617 S. Raymond Ave. Alhambra, Calif. Cu 3-1167

The Haller Testing Laboratories, Inc.

140 Cedar St., N. Y. 6, N. Y.

Testing and Inspection of Construction Materials for:
Expressways—Airports
Structures—Bridges

Complete Soils Laboratory

Test Borings—Load Tests

New York, N. Y. Boston, Mass.
Plainfield, N. J. New Haven, Conn.

Robert W. Hunt Company

Inspection and Testing of Engineering Materials & Equipment
New York • Chicago • San Francisco and other Principal Cities

Johnson Soils Engineering Laboratory

Foundation Design - Highway & Airport Pavements - Construction Control - Load Tests - Shear & Consolidation Tests - MOBILE LABORATORIES
193 West Shore Ave., Bogota, N. J.
Bogata-Hubbard 7-4408

Pittsburgh Testing Laboratory

A national service with complete laboratory and inspection facilities.
Laboratories in principal cities.
Main Office: 1330 Locust St., Pittsburgh, Pa.

SURVEYORS

James L. Bell & Company

Surveyors
Surveying Crews Available For Any Location—Contract Or Per Diem Basis

KANSAS CITY
9425 W. 75th
Overland Park, Kansas

DENVER
1917 Broadway
Denver 2, Colorado

When you need a SPECIALIST in a hurry . . .
Engineering News-Record's Professional Service Section offers the quickest, most direct method of contacting consultants who may be available NOW.

CHECK this section whenever you need professional advice.

SEARCHLIGHT SECTION

(Continued from page 146)

PILING

SURPLUS NEW and USED — For Sale, Wanted or Rent

RAILS-TIES

TRACK ACCESSORIES
NEW and RELAYING

We do a Nation-Wide business in
STEEL SHEET PILING

IMMEDIATE SHIPMENT
380 pcs. 60 ft Beth. DP-2—New York
292 pcs. 60 to 30 ft. Carn. M-116—Illinois
369 pcs. 60 to 50 ft. Beth.—ZP-32—Maryland
490 pcs. 42 ft. Carn. M-116—Louisiana
244 pcs. 35 ft. Carn. M116—Wisconsin
290 pcs. 35 to 15 ft. Beth. AP-3—Ohio
190 pcs. 25 ft. Beth. DP-2—Massachusetts
Other Lengths & Sections at Various Locations

PILE DRIVING EQUIPMENT

Vulcan and McKiernan-Terry
Steam Pile Hammers and Extractors
Hoists and Boilers

MISSISSIPPI VALLEY EQUIPMENT CO.
Railway Exchange Bldg.
St. Louis 1, Mo. CHestnut 1-4474

H-BEARING PILES

Immediate Shipment From Regular Warehouse Stocks at ALL FOSTER WAREHOUSES

8" - 10" - 12" - 14"

L.B. FOSTER Co.

PITTSBURGH 30 • NEW YORK 7 • ATLANTA 8
HOUSTON 2 • CHICAGO 4 • LOS ANGELES 5

RAILS
NEW — RELAYING — TRACK ACCESSORIES
MIDWEST STEEL CORP.
502 DRYDEN STREET
CHARLESTON, W. VA.
IMMEDIATE DELIVERY

PIPE
Surplus New & Used
FOR SALE

STEEL SHEET PILING
350 pcs. CARNEGIE MP 115—40' & 44'
980 pcs. LARSSEN II—30' & 40'
STOCKS—NEW ORLEANS—TAMPA—JACKSONVILLE
PILE HAMMERS & EXTRACTORS
McKIERNAN TERRY E-4—VULCAN 800A
9B3—McK-T. DELMAG D12 DIESEL
SEABOARD STEEL CORP.
4521 South Tamiami Trail Sarasota, Florida
Telephone Ringling 7-0461

PILING • PILE FITTINGS • PIPE
CULVERTS • VALVES & FITTINGS
SPECIALISTS IN PRE-FAB. PIPING
qp ALBERT PIPE SUPPLY CO., INC.
Berry at North 13 Sts., B'klyn, N. Y.
ALBERT PIPE SUPPLY APS

RENT STEEL SHEET PILING

Get the exact lengths and sections you need of all standard sections, delivered *on time*—and at Foster's usual low rental rates.

H-BEARING PILE
PIPE FOR PILING
LIGHT-WEIGHT STEEL PILING
PILE HAMMERS & EXTRACTORS

L.B. FOSTER Co.

PITTSBURGH 30 • NEW YORK 7 • CHICAGO 4
ATLANTA 8 • HOUSTON 2 • LOS ANGELES 5

STEEL SHEET PILING

400 PCS. CARNEGIE MZ32—60 FT.
600 PCS. CARNEGIE MP101—60 FT.
347 PCS. BETH. AP3—25 & 30 FT.
416 PCS. BETH. DP2—31', 37' & 50'
366 PCS. BETH. ZP32—25', 36' & 48'
213 PCS. CARNEGIE MZ27—48 FT.
PILING BOUGHT—SOLD—RENTED

15 x 24 PORTABLE CRUSHER

Model 15 A Diamond Crushing Plant, 15 x 24 Jaw Crusher, 30" x 8' Apron Feeder, Hopper 24" x 26' Conveyor, Gasoline Engine on Pneumatic Tires.

R. C. STANHOPE, INC.
60 E. 42nd St. N. Y. 17, N. Y.

EST. 1904
DAVIDSON PIPE COMPANY INC.
One Of The Largest Stocks In The East
Seamless and Welded ⅛" to 26" O.D. All wall thickness Manufactured. Specialty large size. Cutting — Threading — Flanging — Fittings — Valves.
Call GEdney 9-6300
50th St. & 2nd Ave., B'klyn 32, N. Y.

GLOBE PIPE & FITTING CO.
VALVES FITTINGS NEW PIPE USED FOR ALL PURPOSES
785 Metropolitan Ave., Brooklyn 11, N. Y.
EVergreen 7-6220

ADVERTISERS IN THIS ISSUE

e-Chalmers Mfg. Co. (Tractor Div.)..76, 77
eon Engine Div., G. M. C..... 69
erican Bridge Div., U. S. Steel Corp..64, 130
erican Marietta 61
erican Steel & Wire Div.,
S. Steel.....124, 125
wright Finishing Co..... 93
Asphalt Institute.....86, 87
motive & Aircraft Div..... 51

er-Greene Co. 17
lehem Steel Co..... 1
minous Coal Institute..... 44
y Knox, Const. Equip. Div..... 109
Equip. Co..... 94

ginal Engineering 41
Foundation Co..... 115
Iron Pipe Research Assoc.....12, 13
rpillar Tractor Co..... 22
tex Corp., The..... 78
ago Bridge & Iron Co.....2nd Cover
y & Sons, James B..... 122
crete Reinforcing Steel Institute..... 95
inental Motors Corp..... 11

nison Engineering 57
-O-Wal 123

estra, Inc. 62, 63
men's Fund Ins. Co., (National Surety) 119
tible Road Joint Machine Co.....96, 97
Motor Co., Indust. & Engine Div..... 75
er Co., L. B..... 2

Wood Industries, Inc.....70, 71
Greenberg's Sons..... 113
in Wellpoint Corp..... 88
id Co..... 116
or Plywood Corp.....8, 9
tford Fire Ins. Co.,
oup Hartford Accident & Indemnity Co. 48
gh Co., Frank G.....3rd Cover

ois State Toll Road Comm..... 119
rnational Harvester Co. (Trucks)..120, 121
Mfg. Co..... 15
gton Form & Tank Corp..... 68

s-Manville Corp. 105
Mfg. Co..... 19

igan Iron Works, Inc.....6, 7
fel & Esser Co..... 84

Lamson & Sessions Co..... 127
x Joint Pipe Co..... 20

on Co., R. C..... 58
onite Corp. 103
on Construction Co..... 110
Kiernan-Terry Corp. 102
western Ind., Inc..... 16
etrench Corp. 92
se-Starrett Prod. Co..... 117

onal Clay Pipe Mfg. Inc..... 67
onal Steel Corp. Great Lakes Steel Co.. 47
onal Supply Co., Ind. Prod. Div..... 85
le Co. 34, 35

le Co. 74
sburgh Coke & Chem. Co..... 128
sburgh Steel Prod. Co.....52, 53
land Cement Assn..... 90
tatite Keystone Prod. Engr. Co..... 111

mond Concrete Pile Co.....4, 5
a Pump 115
nolds Metal Co., Inc..... 72
mond Screw Anchor Co., Inc..... 135
o Laminated Prod., Inc..... 117
ney Hunt Machine Co..... 133
bling's Sons Corp., John A..... 39
ssell, Burdsall & Ward Bolt & Nut Co.. 59

ramm, Inc. 100, 101
ricised Prod. Co..... 14
field Steel & Southwest Steel..... 33
w-Nabstedt Gear Corp..... 74
oco Prod. Co 80, 81
cer, White & Prentis, Inc..... 83
gue & Herwood, Inc..... 40
g Corp., John W..... 82
Mfg. Co..... 89
erior Concrete Accessories..... 79

ber Engineering Co..... 50
ken Roller Bearing Co.....4th Cover
rington 98
sey Varnish Co..... 18
scon Laboratories 66

Umeco Optical Div..... 83
Underpinning & Foundation Co..... 88
Union Oil Co..... 10
Unit Crane & Shovel Corp..... 126
U. S. Rubber Co..... 24
U. S. Steel Corp.....106, 107
Universal Sewer Pipe Corp..... 3

Vermeer Mfg. Co..... 113

Wild Heerbrugg Instrument Inc..... 60
Williams Equipment & Supply..... 102
Worthington Corp. 42, 43

Yeomans Brothers Co..... 46

Professional Services.....147-150

CLASSIFIED ADVERTISING

F. J. Eberle, Business Mgr.

Employment Opportunities 140-144
Proposals 138-140
Educational 145
Equipment
(For Rent, Sales Wanted)
145, 146, 150
Wanted 145

ENGINEERING NEWS-RECORD

330 West 42 St., New York 36—LOngacre 4-3000

ABP Member

Number of copies of this issue printed 76,693

D. S. ROBERTSON, Advertising Manager
D. J. CASSIDY, Business Manager

ADVERTISING REPRESENTATIVES
New York 36—500 5th Ave.

C. D. Neulen, H. T. Olsen
J. C. White

Chicago, 11—520 No. Michigan Ave.,
L. H. Hunt, W. G. Payne
J. A. Shipley

San Francisco, 4—68 Post St.,
J. W. Otterson, R. C. Alcorn

Philadelphia, 3—17th and Sansome Sts.,
D. G. Jensen, D. L. Kates

Cleveland, 15—Hanna Bldg.,
F. P. DiToro, E. B. Mingle Jr.

Detroit, 28—Penobscot Bldg.,
J. A. Houghton

St. Louis, 8—Continental Bldg.,
B. F. Horn

Los Angeles, 17—1125 W. Sixth St.,
H. L. Keeler

Atlanta, 3—Rhodes-Haverty Bldg.,
D. C. Billian

Dallas, 1—Vaughn Bldg., 1712 Commerce St.,
E. E. Schirmer

Pittsburgh, 22—919 Oliver Bldg.,
M. Russell

OTHER SALES OFFICES:
Boston, 16—350 Park Square Bldg.,
London, McGraw-Hill House

All business is specialized

. . . and nothing specializes on your business like your business paper

This smart business man spends his time where every sitzmark parks a prospect at his feet. He *specializes*. Your business is specialized, too . . . and so is your business paper. It's concentrated on *your* business. Both editorial and ad pages report what's new that's good . . . suggest new methods . . . gather in one place a raft of ideas on where-to-buy-what.

That's help you can't find concentrated into such quick reading time anywhere else! It's simple sense to read every page . . . every issue.

This business paper in your hand has a plus for you, because it's a member of the Associated Business Publications. It's a *paid* circulation paper that must *earn* its readership by its quality . . . And it's one of a leadership group of business papers that work together to add new values, new usefulness, new ways to make the time you give to your business paper still more profitable time.



A copy of this quick-reading, 8-page booklet is yours for the asking. It contains many facts on the benefits derived from your business paper and tips on how to read more profitably. Write for the "WHY and HOW booklet." Room 2710.

McGRAW-HILL PUBLISHING COMPANY
330 W. 42nd St., New York 36, N. Y.

One of a series of ads prepared by
THE ASSOCIATED BUSINESS PUBLICATIONS

Voters Back Home

SPURRED BY LETTERS from voters back home, Congress is making its most determined effort ever to cut the budget requests of the various government departments. The results may not be spectacular, but the process is a useful one. Forced to defend their requests, department heads are definitely subjected to a brake on any free-spending tendencies they may have. But perhaps more important, the ensuing debate brings the public face to face with the fact that many items are in the budget because of legislation passed under the pressure of letters from voters back home—sometimes the same voters who are now writing letters urging economy.

In the field of public works, for example, there is the $50 million grants-in-aid for pollution control. Grave doubts were expressed in many places, including these pages, of the advisability or necessity of this federal assistance, but it was voted, and the Department of Health, Education and Welfare had no choice but to budget it.

Then there is the matter of Title I slum clearance. Proposed cuts in aid for these urban redevelopment projects have met loud protests from the voters back home. A committee of mayors called on the President to protest any plan to reduce slum clearance funds, and Robert Moses pungently expressed his pessimism that New York's big Lincoln Square development would have to be abandoned unless the federal government is more generous.

Aid for schools is another question at issue. Legislation committing the federal government to this program has not yet been passed, but many voters back home are in favor of it. The budget as a consequence includes a $451 million item for aid by the federal government to school construction.

These are cited as typical programs of federal aid for local facilities. There are others, but the important point is that they all represent demonstrated local needs, on which voters back home have passed the responsibility to the federal government. Because this is all too easy, and because Congress is often amenable, the federal budget is bound to grow. Once a year, as of now, both the people and Congress are given an opportunity to reflect on the consequences—and the alternative.

The consequences are, of course, continued growth of the federal budget as the country's needs grow. In itself this is not dangerous; what is dangerous is for the federal budget to take an increasing share of the total national income, which fortunately the current budget does not do. As to the alternative, this would be for the states and the municipalities to do many of their necessary tasks without federal aid. Almost always it would be less costly, at least by the amount of federal administrative costs which must be added to the local administrative costs. But the tendency has been to gloss over this fact and to expand the number of federal aid programs. An the federal budget reflects this tendency.

So, the voter back home should reflect on this fact budget cutting time. He has it in his power to redu the cost of federal government if he will assume th added cost to state and municipal government. An there will, of course, be added costs, for the sewage plant the urban redevelopment and the schools cannot just b forgotten—not if the country's standard of living is to b increased and its economic growth is to be continue

That is the central fact. Growth must continue. I the realm of public works, cost savings would be possib if the federal government did less and the local gover ments more. But the voter back home is the one t decide. He cannot just criticize big federal budgets, an continue to pass along his responsibilities at home to th federal government.

Loans for Foreign Aid

TWO SIGNIFICANT PROPOSALS for changes in our foreig aid operations are rapidly gaining favor in Washingto and if adopted will be of importance to the U. S. con struction industry. One is to move the strictly militar aid items into the Department of Defense budget, wher they logically belong. This will permit the economi and technical assistance items to be seen without con fusion. The other proposal is to substitute loans fo grants in the economic assistance program in so far a possible.

The loan proposal is particularly significant. It would permit longer term development projects to be under taken than has been possible. Loans are more acceptable to many countries than outright gifts. And loans might be less costly to the U. S.

The loan idea, however, needs to be adopted with caution and administered with extreme care. Some of these loans will never be repaid; that fact needs to be accepted in advance. Such loans in some instances will be in competition with loans by the World Bank or by private investors; the program will have to be ad ministered with care in order that "easy" assistance loans will not go to those who can afford to take normal ones.

Economic and technical assistance to underdeveloped countries has been declared to be a necessary part of our national policy by every committee of business men which has studied it, as well as by our government lead ers. In some way it should be put on a basis that the people at large can understand, and that Congress will readily support. These new proposals should go a long way in assuring these results. In any event it will be easier to justify $950 million for economic and technical assistance than the $4,150 million for military and eco nomic and technical assistance combined, which Con gress is now debating with such heat.

"Savings So Great . . .

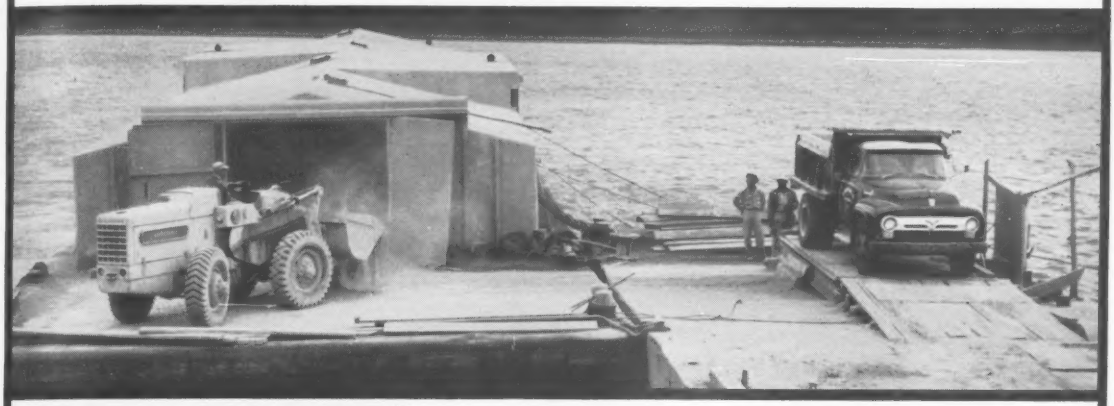

PAYLOADER® and barge are used

wherever Water Transport is available"

Barber Bros. Co. builds a lot of soil-cement roads around Baton Rouge, and their cost for Portland cement *at the job* is very important. So they devised this unique system of unloading bulk cement from barges, with savings so great that they take delivery via water whenever possible.

The *system* consists of a barge carrying a platform scale and moored to the shore so that dump trucks can back directly onto the scales, PLUS a "PAYLOADER" tractor-shovel. The bulk-cement delivery-barge ties alongside the other and the "PAYLOADER" shuttles from one to the other to load the trucks. A worker watches the scale beam and halts the loading when the truck receives its exact cement load.

Precise dumping control, quick power-steering and 4-wheel-drive on big rubber tires [to walk easily from barge-to-barge] are some of the "PAYLOADER" features that make this operation a success.

PAYLOADER®
MANUFACTURED BY
THE FRANK G. HOUGH CO. LIBERTYVILLE, ILL.
SUBSIDIARY—INTERNATIONAL HARVESTER COMPANY

The 1¾ cu. yd. model HH is one of three sizes of 4-wheel-drive "PAYLOADER" units that are oustanding examples of tractor-shovel engineering . . . with uses and usefulness limited only by the ingenuity of the construction men that use them. Your nearby "PAYLOADER" Distributor will be glad to demonstrate the size and type that fits your job, on your job.

THE FRANK G. HOUGH CO.
772 Sunnyside Ave., Libertyville, Ill.

- ☐ Model HO (2¼ Yd. Payload, 1¾ Yd. Struck)
- ☐ Model HH (1¾ Yd. Payload, 1½ Yd. Struck)
- ☐ Model HU (1½ Yd. Payload, 1 Yd. Struck)

NAME

TITLE

COMPANY

STREET

CITY STATE

79

Has power to push the biggest loads –has TIMKEN® bearings to take 'em

RADIAL and thrust loads on vital moving parts are tremendous in this 40,125 lb. Galion Motor Grader, the world's biggest, as it pushes tons of earth at a clip. To take the heavy loads and keep the giant machine working smoothly and steadily, Galion Iron Works engineers specified Timken® tapered roller bearings for the front wheels, steering gear, circle reverse case, side shift case, tandem drive case and final drive.

Timken bearings take radial and thrust loads in any combination. It's the tapered construction that does it. And full line contact between rollers and races gives Timken bearings *extra* load-carrying capacity. Shafts are held in rigid alignment. Gears mesh smoothly. Shafts and housings stay concentric making closures more effective. The machine keeps on the go with less wear, less maintenance.

Timken bearings take the shocks of rutted, uneven ground, too. That's because Timken bearing rollers and races have tough, shock-resistant cores under hard, wear-resistant surfaces. Longer bearing and machine life are assured.

Timken bearings roll the heavy load smoothly—don't slide it. They practically eliminate friction. Timken bearings are designed by geometrical law to have true rolling motion and manufactured with microscopic accuracy to conform to their design.

Only Timken bearings give you so many advantages. Make sure you get them; always specify Timken bearings for the machines you design, buy or build. Look for the trade-mark "Timken" on every bearing. The Timken Roller Bearing Company, Canton 6, Ohio. Canadian plant: St. Thomas, Ontario. Cable address: "TIMROSCO".

This symbol on a product means its bearings are the best.

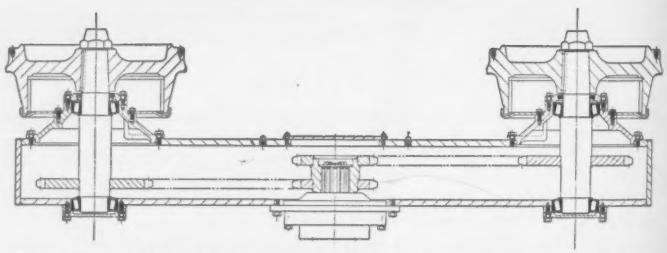

How **GALION IRON WORKS & MFG. CO.**, Galion, Ohio, uses Timken bearings in the tandem rear wheels of T-700 Motor Grader to take heavy loads, reduce friction, assure trouble-free, dependable performance.

TIMKEN

TRADE-MARK REG. U.S. PAT. OFF.

TAPERED ROLLER BEARINGS ROLL THE LOAD